


MIPOLAM ELEGANCE


gerflor.com

FLOORING AND SHOWER SYSTEM




Gerflor[®]
theflooringgroup

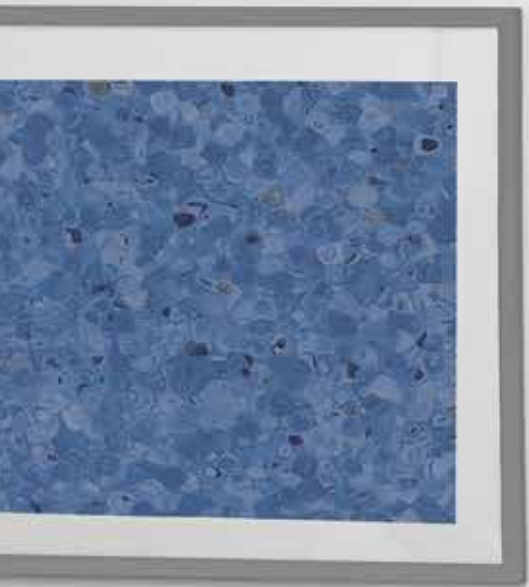

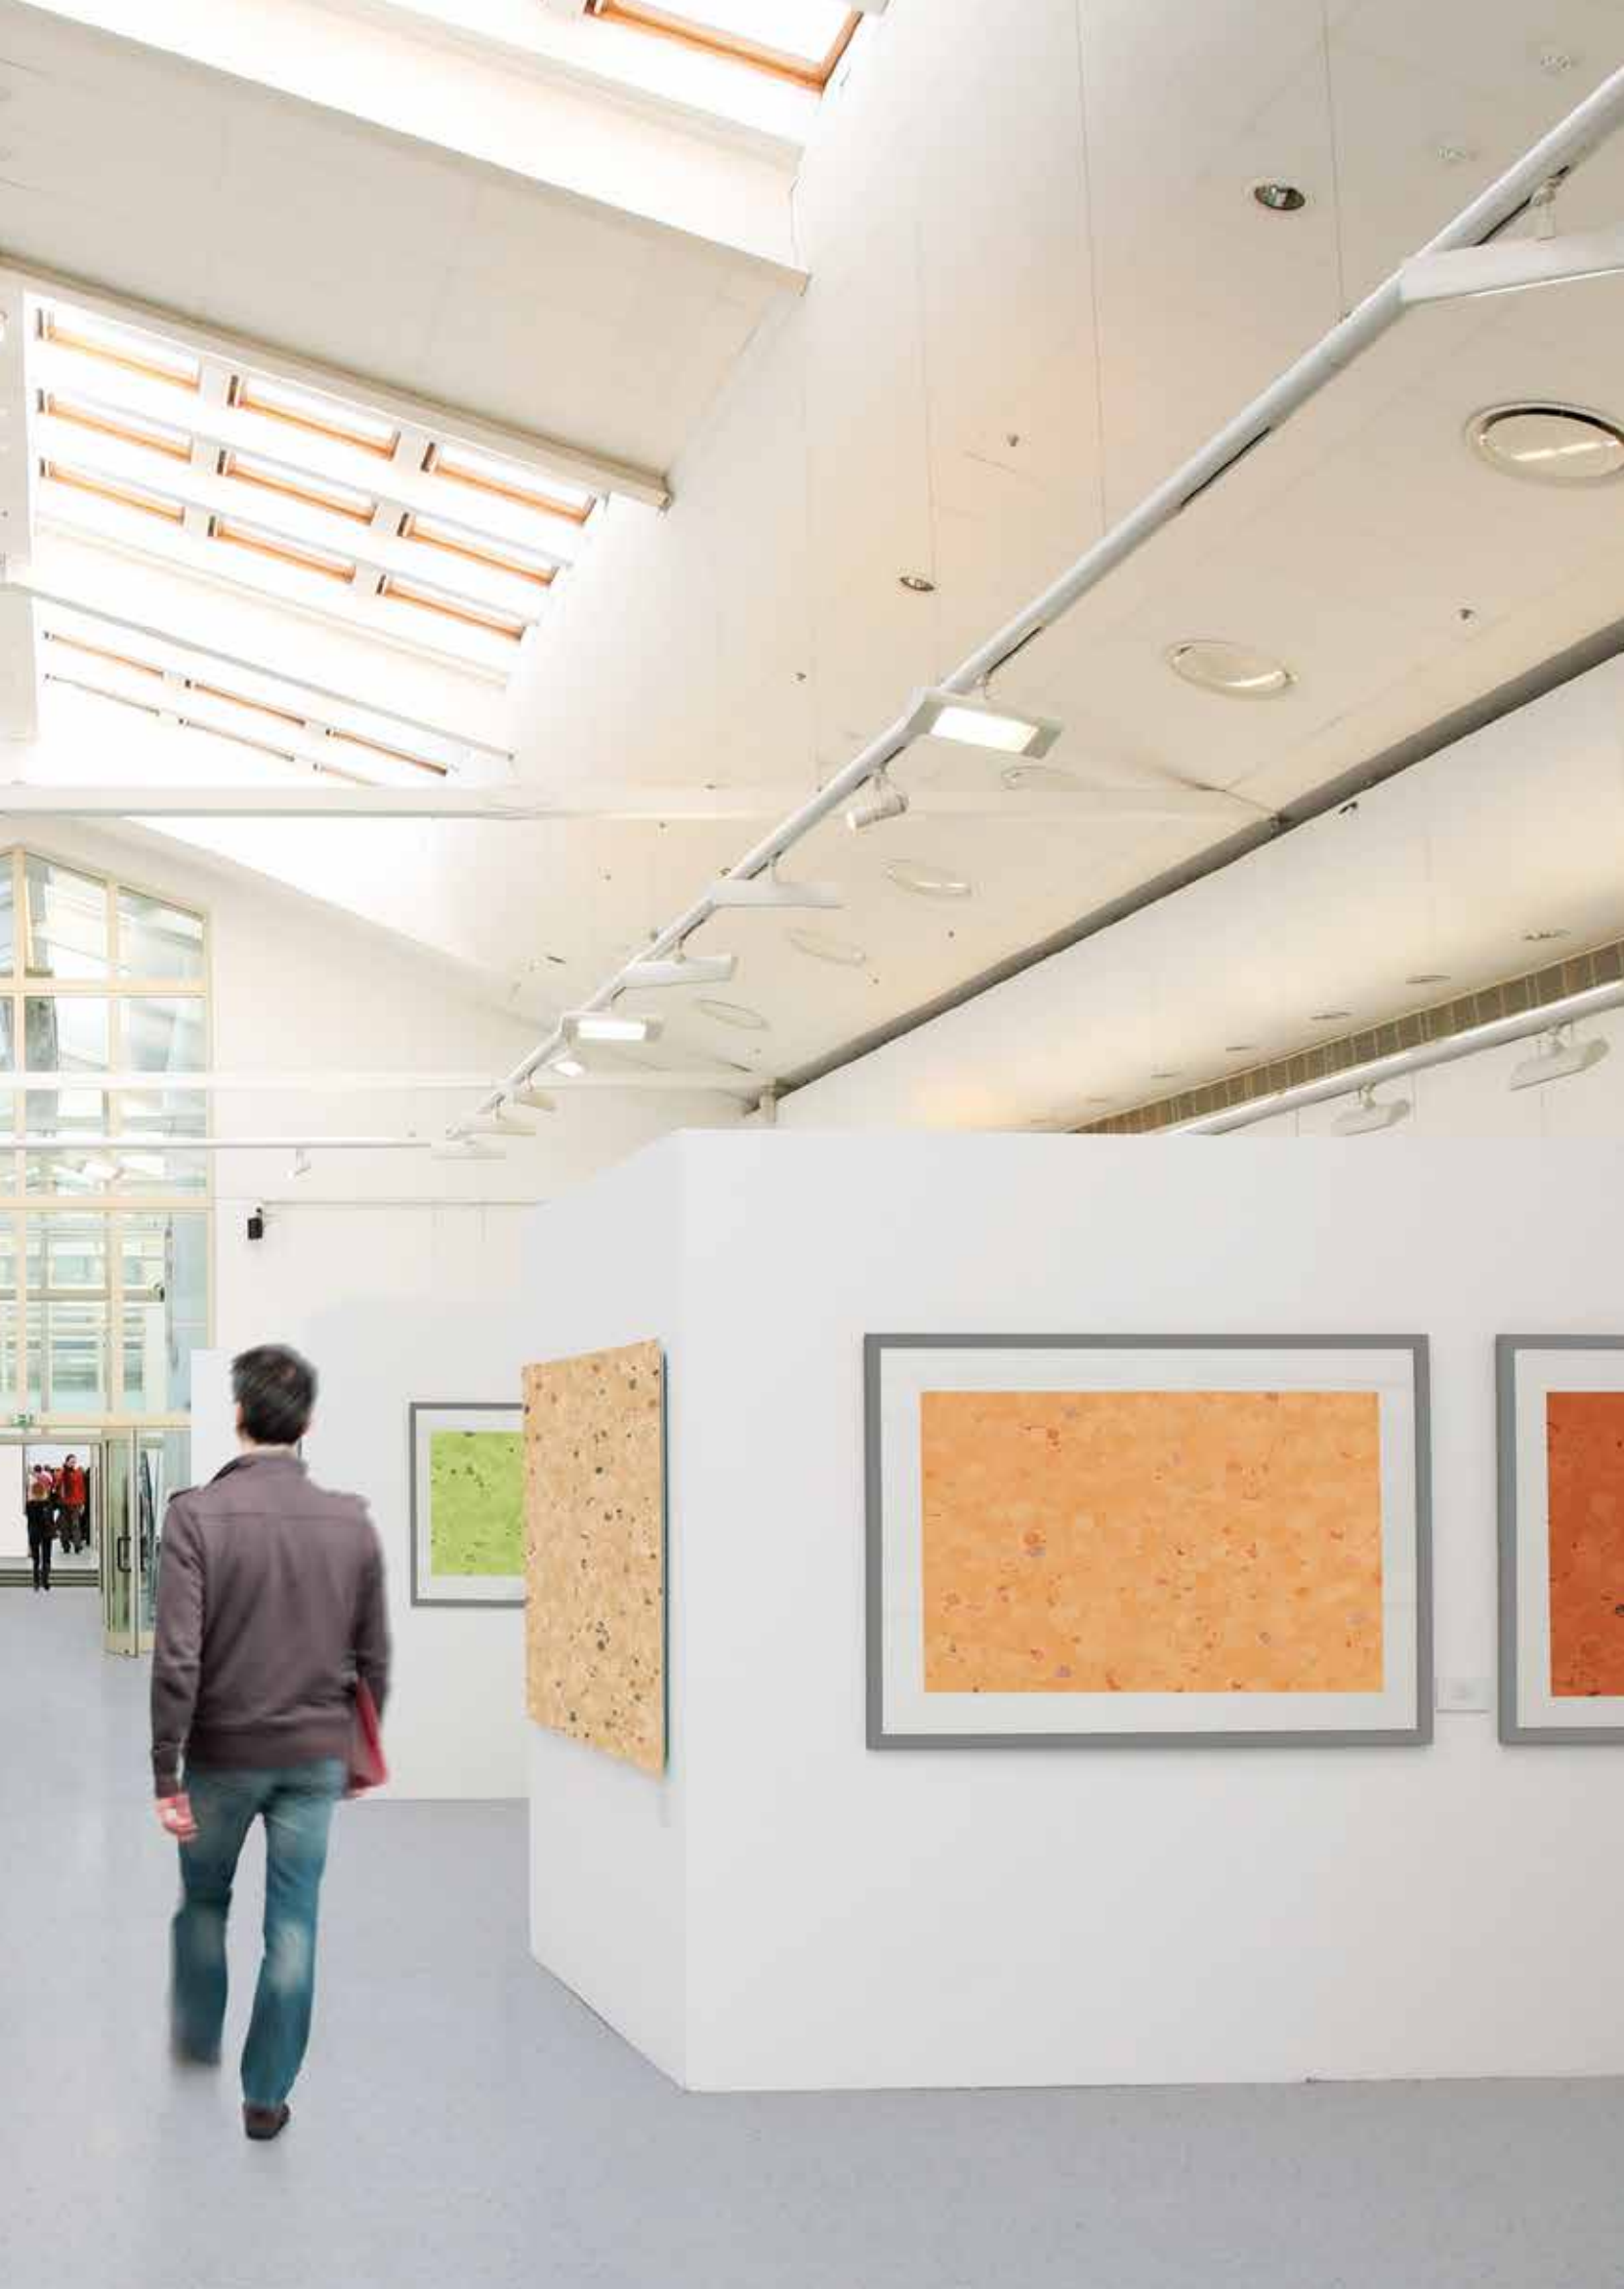

MIPOLAM ELEGANCE


| | | | | |
|--|---|-------|-----------|---|
|  2 m |  | 34-43 | Evercare™ |  100% recyclable |
|--|---|-------|-----------|---|

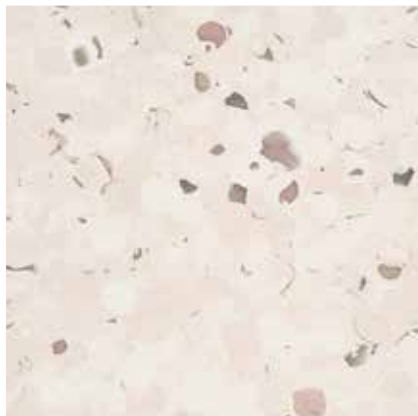


0347 Mangoustan
NCS: 1005-Y60R / LRV: 67,9



0705 Patisson
NCS: 1502-Y / LRV: 64,4

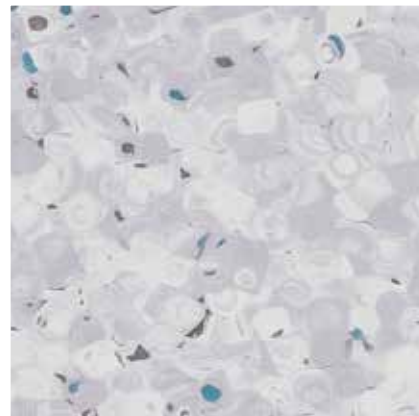

0318 Grape
NCS: 2005-R80B / LRV: 51,4

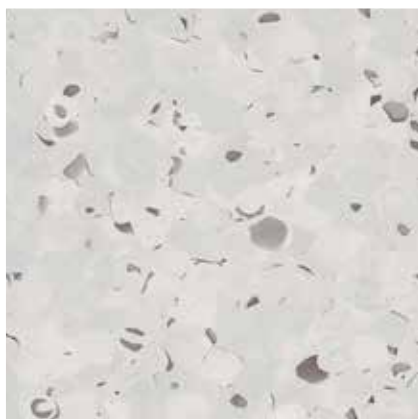


0696 Ginger
NCS: 1502-B / LRV: 59,7




0343 Pecan
NCS: 2500-N / LRV: 46,9



0697 Greenstone
NCS: 3005-R80B / LRV: 37,1

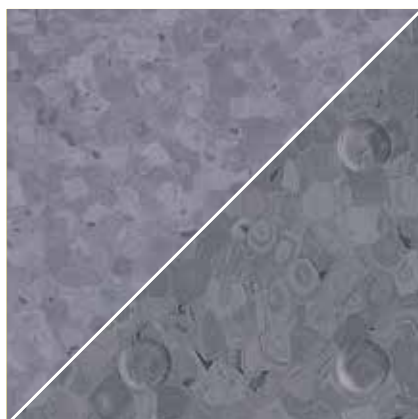

0704 Raspberry Grey
NCS: 5005-R80B / LRV: 20,3

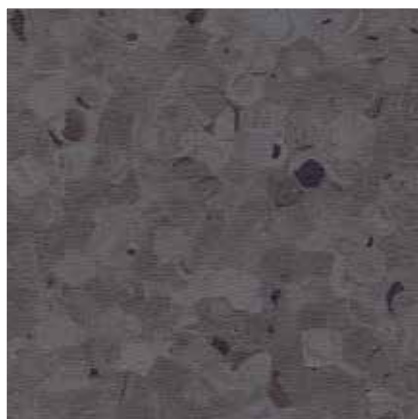

0344 Nutmeg
NCS: 7000-N / LRV: 11,8




0321 Olive
NCS: 8502-B / LRV: 6,9




0323 Nut
NCS: 2005-Y20R / LRV: 50,6




0328 Almond
NCS: 1505-Y30R / LRV: 61,0

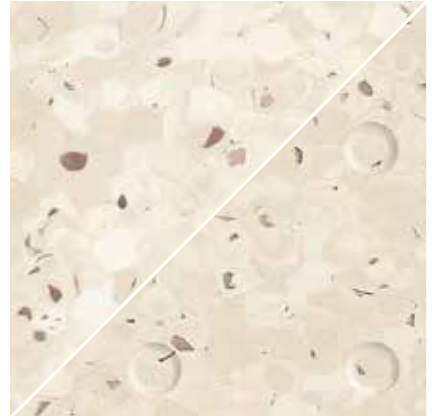


0322 Jicama
NCS: 1505-Y20R / LRV: 67,8

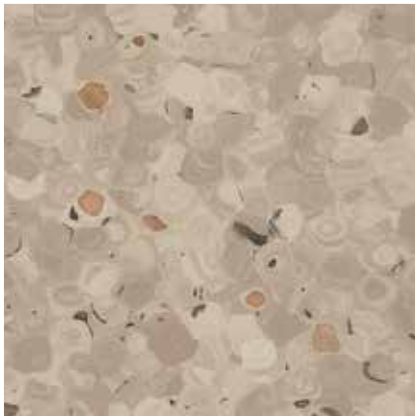


0324 Chestnut
NCS: 3005-Y20R / LRV: 37,2

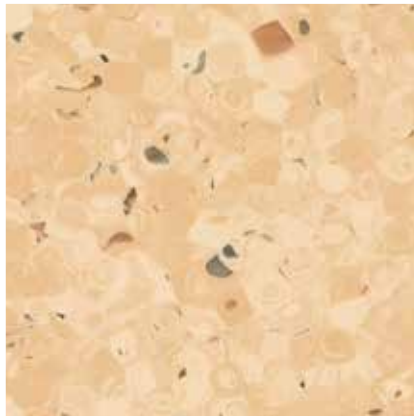


0327 Pear
NCS: 1015-Y30R / LRV: 55,0

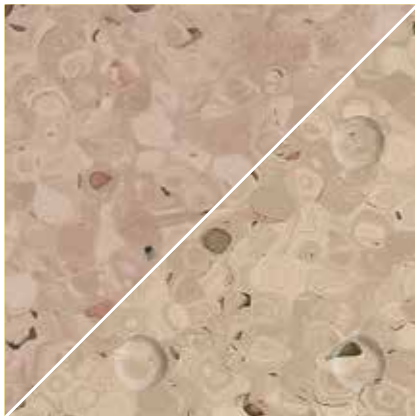

0329 Hazelnut
NCS: 3010-Y40R / LRV: 36,4

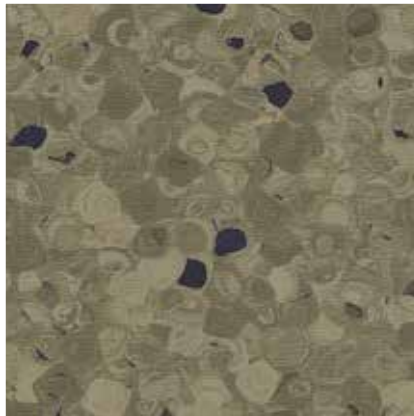


0326 Jojoba
NCS: 5020-G70Y / LRV: 18,9

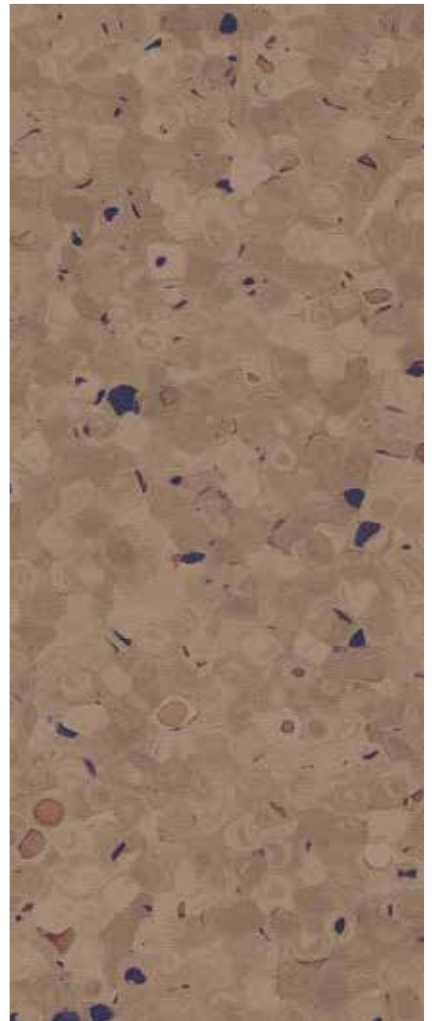


0698 Cacao
NCS: 6010-Y30R / LRV: 17,7




MIPOLAM ELEGANCE



0699 Banana
NCS: 0520-Y20R / LRV: 64,3

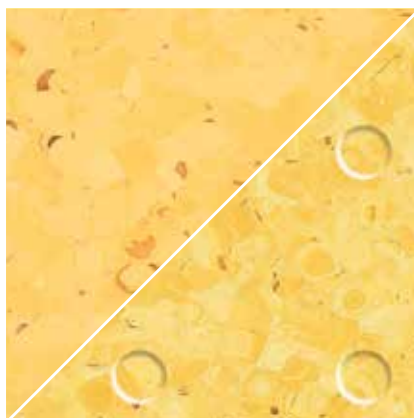


0333 Ananas
NCS: 0550-Y10R / LRV: 57,9

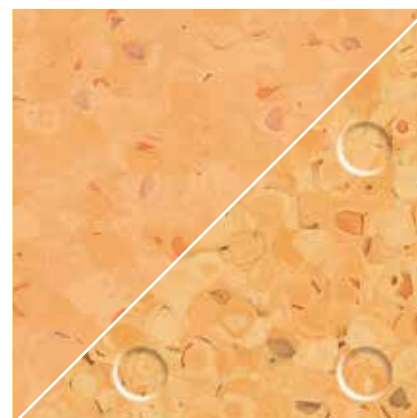

0700 Melon
NCS: 1040-Y30R / LRV: 48,2



0330 Litchi
NCS: 4030-Y80R / LRV: 17,5

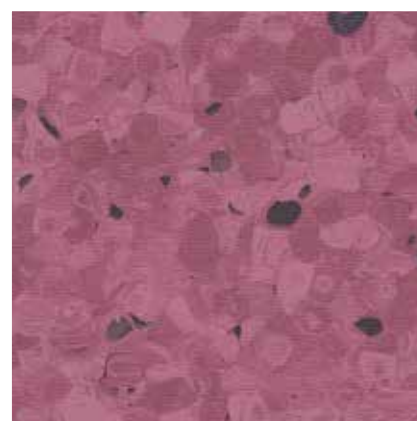


0331 Plum
NCS: 4040-R10B / LRV: 15,0




0702 Kumquat
NCS: 3060-Y60R / LRV: 19,8




0336 Acerola
NCS: 2570-Y80R / LRV: 12,6

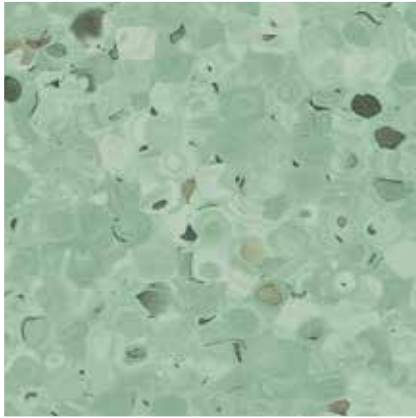


0339 Apple
NCS: 2020-G10Y / LRV: 40,6

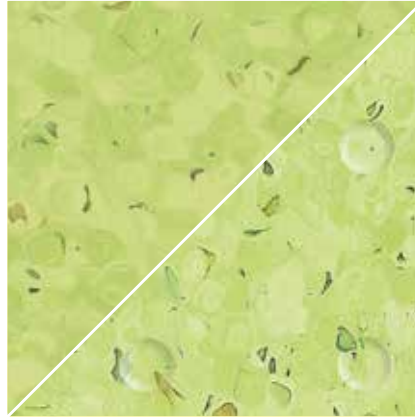


0338 Kiwi
NCS: 1040-G50Y / LRV: 47,9

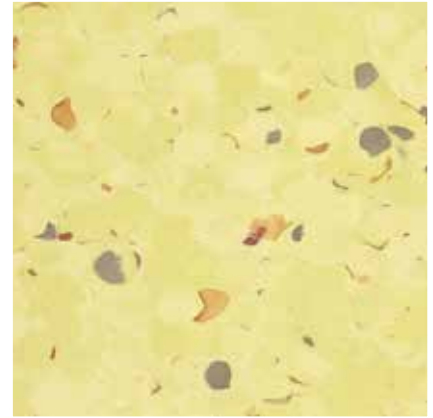

0703 Lime
NCS: 1030-G90Y / LRV: 58,5

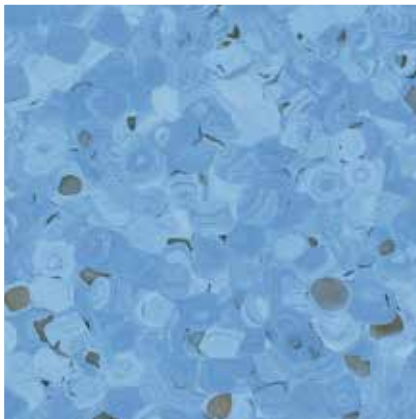

0348 Bluetta
NCS: 2040-R90B / LRV: 34

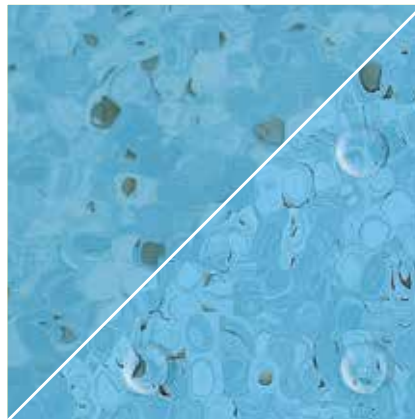


0341 Bilberry
NCS: 2040-B10G / LRV: 34,8




0340 Jambolan
NCS: 1030-B30G / LRV: 45,6



0349 Bluecrop
NCS: 4030-R80B / LRV: 17,8

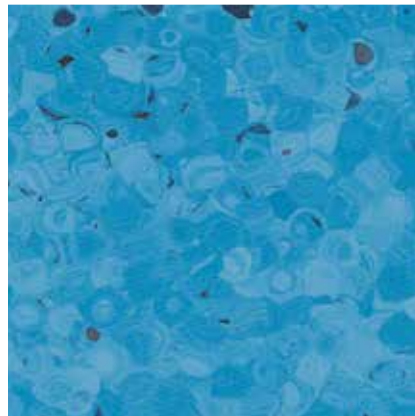

0342 Blueberry
NCS: 2050-B / LRV: 25,8

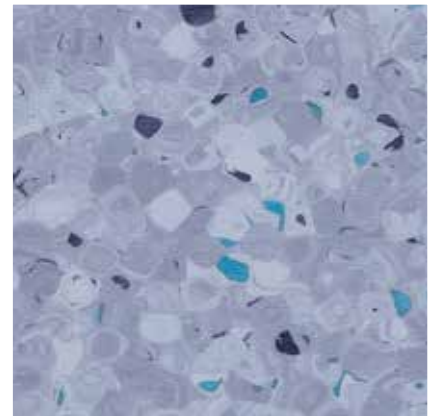


0319 Quetsche
NCS: 3020-R80B / LRV: 31,0



MIPOLAM ELEGANCE

A large choice of 33 colours equipped with a revolutionnary surface treatment

- ▶ High performance homogeneous flooring suitable for heavy duty traffic, available in sheet format.
- ▶ **Group T** wear rating compliant (very high resistance to traffic).
- ▶ Innovative true non-directional design, available in 33 contemporary colours.
- ▶ Elegant design with transparent particles (100 % PVC) for 3D effect and modern matt finish.
- ▶ Evercare™ surface treatment: no wax for life.
- ▶ 100% recyclable.

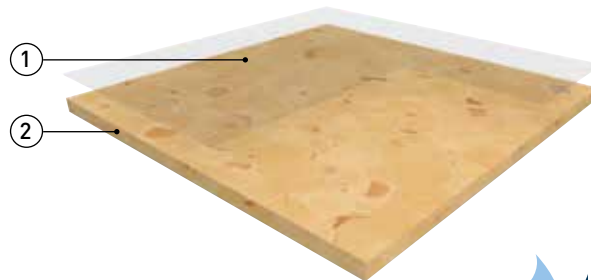

- ① evercare™ surface treatment
- ② 2 mm pressed monolayer



MIPOLAM ELEGANCE is a monolayer homogeneous flooring with a high PVC content pressed in 2m sheets, with a thickness of 2mm and a weight of ≤ 2850g.

The non directional design with colour throughout the thickness integrates a 3D effect (transparent particles in pure PVC on all 33 references) and a matt finish.

This flooring is recommended for administrative buildings making skirtings easier, as well as angles and welding.

The flooring is equipped with Evercare™ the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. This Evercare™ treatment avoids staining of chemical products used in Healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring.

This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes.

The flooring is composed of minimum 25% recycled content 100% controlled and is REACH compliant.

This flooring is anti-static (<2kV) and resistant to the main chemical products used in healthcare (no impact of betadine after 24 hours).

The product is non reactive to residual indentation with a value ≤ 0,02 mm (EN 433)

The flooring complies with EN 649 (34-43) offering a group T wear rating suitable for heavy duty traffic areas and Bfl-s1 fire resistance. The product emission rate of volatile organic compounds is <10 µg/m³ (TVOC after 28 days ISO 16000-6).

EVERCARE™ TECHNOLOGY

AN EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR

THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT



Highly Durable: Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare.

Longer life expectancy.

100% non-porous surface:

The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.

Simple and easy stain removal.



SPECIAL SHOWER ELEGANCE SD

The bathroom is coordinated to the room with 8 anti-slip references complying with bare foot standard




0705 Patisson



0322 Jicama



0329 Hazelnut




0704 Raspberry Grey




0700 Melon



0333 Ananas



0338 Kiwi





0341 Bilberry



Special shower Elegance SD consists of a 2.4 mm (on grain side) monolayer sheet with the design through the whole thickness and a specific embossing for use with bare foot (DIN 51 097 - Class B).



Shower threshold: Connection SD floor with a 2 mm floor.

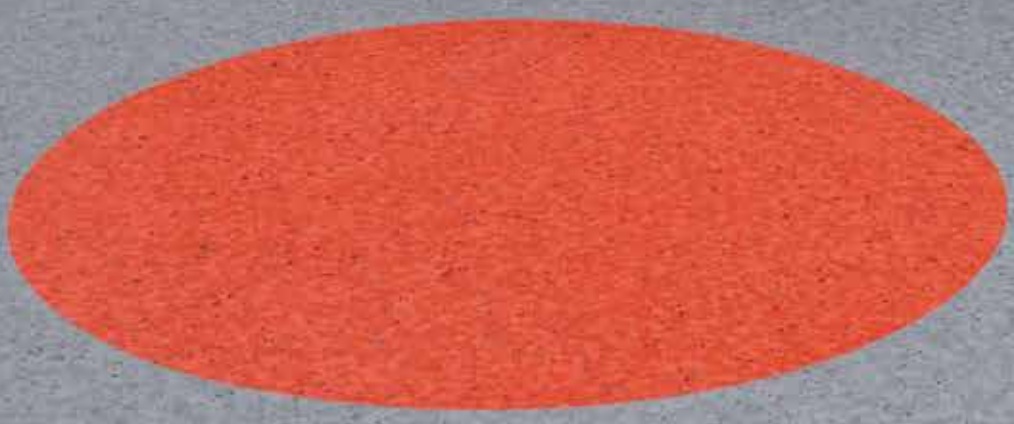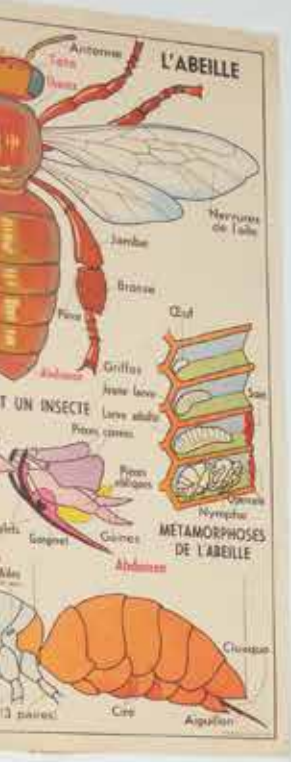



| | MIPOLAM ELEGANCE | | ELEGANCE SD | |
|--|------------------|-------------------|------------------------|----------------------|
| DESCRIPTION / BESCHREIBUNG / DESCRIPTION / BESCHRIJVING / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE | | | | |
| Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale | EN 428 | mm | 2.00 | 2.4 (on grainside) |
| | ASTM F386-02 | inch | 0.08 | - |
| Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso | EN 430 | g/m ² | 2850 | 3015 |
| Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli | EN 426 | cm/lm | 200/20 | 200/20 |
| | - | feet - inch | 6'6" / 66" | 6'6" / 66" |
| Coverage / roll | - | m ² | 40 | 40 |
| | - | sq.ft | 430.56 | 430.56 |
| Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre | EN 427 | mm | 608 x 608 * | - |
| Number of tiles per package / <i>Fliesen-Anzahl</i> / Nombre de dalles par boîte / <i>Aantal tegels per doos</i> / Cantidad de losetas/caja / <i>Quantidade dos mosaicos/caixa</i> / N° piastre per confezione | - | - | 20 | - |
| CLASSIFICATION / KLASSIFIZIERUNG / CLASSIFICATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI | | | | |
| Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto | - | - | EN 649 | EN 649 |
| | ASTM F 1913-04 | - | compliant | - |
| European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea | EN 685 | class | 34-43 | 34-43 |
| Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco | EN 13501-1 | class | B _{fl} - s1 | B _{fl} - s1 |
| | ASTM E648-08 | class | Class 1 | - |
| | CAN/ULC 102.2 | - | - | - |
| Static electrical propensity / <i>Begehaufladung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica | EN 1815 | kV | < 2 | < 2 |
| Slip resistance wet : bare foot / <i>Rutschhemmung - nassbelastete Barfußbereiche</i> / Glissance humide / <i>Anti-slip</i> / Deslizamiento húmedo / <i>Escorregamento húmido</i> / Scivolosità umida | DIN 5197 | class | - | B |
| PERFORMANCE / TECHNISCHE EIGENSCHAFTEN / PERFORMANCES / TESTRESULTAAT / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE | | | | |
| Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione | EN 660.2 | mm ³ | ≤ 2.0 | ≤ 4.0 |
| Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvastheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione | EN 649 | group | T | P |
| Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant | ISO 10581 | Type | I | I |
| Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale | EN 434 | % | ≤ 0.40 | ≤ 0.40 |
| Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta | EN 433 | mm | ≈ 0.02 | ≤ 0.10 |
| Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W) | EN 425 | - | OK | OK |
| Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica | EN 12 524 | W/(m.K) | 0.25 | 0.25 |
| Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce | EN 20 105 B02 | degree | ≥ 6 | ≥ 6 |
| Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie | - | - | Evercare™ | - |
| Chemical product resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici | EN 423 | class | Good | Good |
| Anti-bacterial activity [E. coli - S. aureus - MRSA] ** | ISO 22196 | - | > 99 % inhibits growth | - |
| ENVIRONMENT / INDOOR AIR QUALITY | | | | |
| TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni) | ISO 16000-6 | µg/m ³ | < 10 | < 10 |
| Certification | - | - | Floorscore™ | Floorscore™ |
| CE marking / CE Kennzeichnung / Marquage CE / EG-conformiteitsmerk / Marca de conformidad CE / Marca de conformidade CE / Marcatura CE di conformità | | | | |
| CE | EN 14041 | - | | |

*Products available in tiles for a minimum quantity order of 500 sqm - ** The implementation of an effective cleaning method is the best defence against infection

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE


Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.



Committed to sustainable development

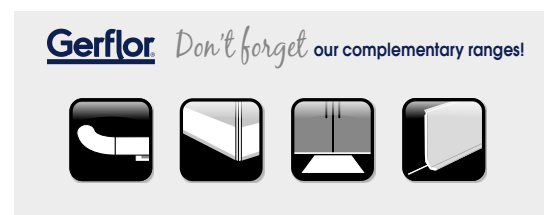

Gerflor
theflooringgroup