

Gerflor®
theflooringgroup





PREMIUM, THE UNIQUE SOLUTION

- The proof is in the customer experience 04
- The best technologies in one 06
- Designs that exceed expectations 20
- A sustainable choice 38
- Gerflor services 40
- Technical data 42

PREMIUM

THE UNRIVALLED HIGH TRAFFIC SOLUTION

The proof is in the customer experience



> **With 600 000 passengers per year,** plus their luggage and carts, this floor covering offers the advantage **of standing up to heavy traffic** while remaining easy to maintain.
> *Pau-Pyrénées Airport, France*

> I realise every day Premium durability in comparison with a standard flooring: one is difficult to maintain, Premium is **clean and perfect**.
> *12 years old elementary school in Nurmo, Finland*

> **For 20 years,** this mass-coloured surface has **always been satisfactory.** We've had **no problem with tears, scratches or wheel marks**.
> *Hospital in Lons-le-Saunier, France*




After 10 years of intensive use,
Premium is still in excellent condition, which is something we are extremely pleased with. The same type of flooring has been used for other schools in our fondation, so we are in a good position to make a comparison.
Premium comes out on top,
each and every time.
Primary school De Meander in Ootmarsum, Netherlands

We wanted a building that promotes employees health and encourages healthy lifestyles, a workplace that serves an exemplar of healthy work environment,
so we selected Premium as the best floor for indoor air quality.
Medibank Headquarters, Melbourne, Australia

Premium flooring
is very resistant to chemical and mechanical attacks,
and this colour range is trendy.
Städtisches Klinikum, Solingen, Germany

The best of both worlds !

In the resilient flooring market, **Premium** offers the best of 2 worlds:
- Homogeneous inlaid surface
- Multilayered construction

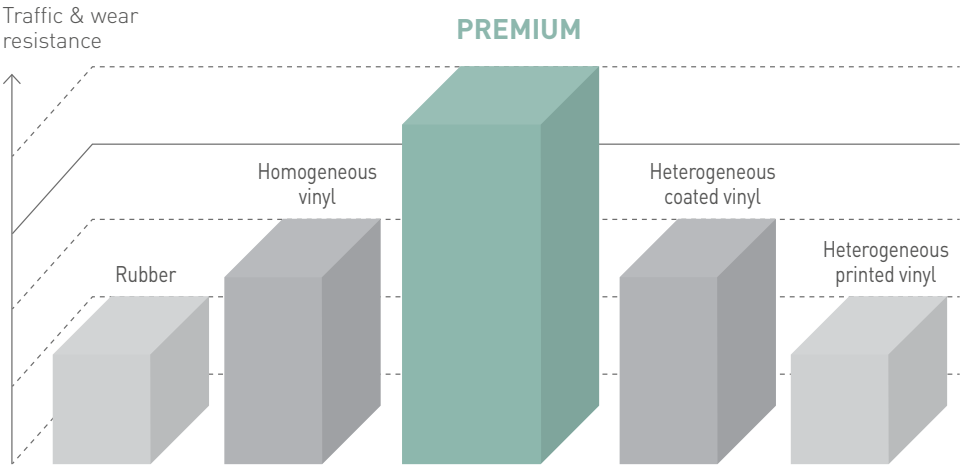

HOMOGENEOUS - INLAID SURFACE


- **Homogeneous wearlayer:**
  - Outstanding durability
  - Longlasting appearance
- **Added value alternative against Rubber, ...**

MULTILAYERED CONSTRUCTION

- **Double fibre glass reinforcement:**
  - Excellent dimensional stability
- **Very High Density Foam Backing**
  - The best acoustic / indentation performances

Top of Gerflor ranges

In the Gerflor product portfolio, **Premium** is the top of homogeneous & multilayered ranges.

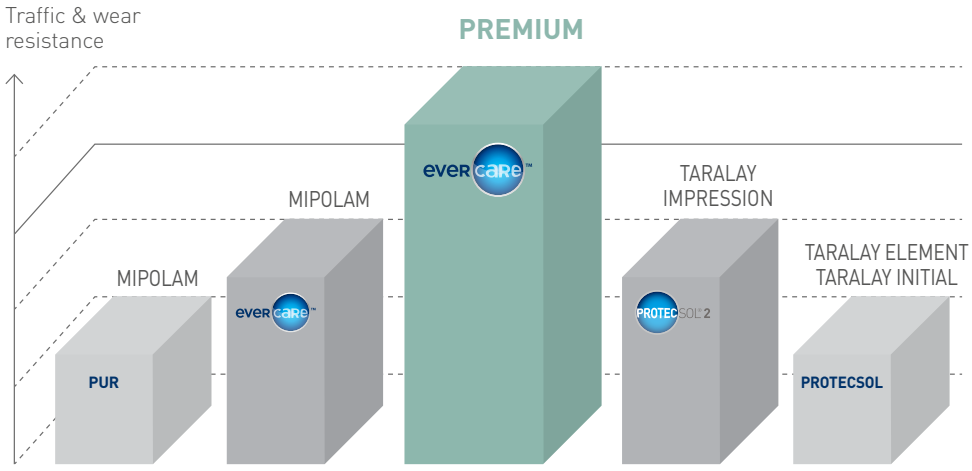

HOMOGENEOUS - INLAID SURFACE

Top of our Homogeneous range:

- 100% Pure Vinyl pressed wearlayer 1mm
- Evercare™ surface treatment
- No scratch and No stain


MULTILAYERED CONSTRUCTION

Top of our Multilayered range, 4 technical solutions:

- Compact version
- Acoustic version
- Attraction® tiles
- Dry-Tex™ System

WHAT MAKES THIS FLOORING UNIQUE?

The difference is in the details

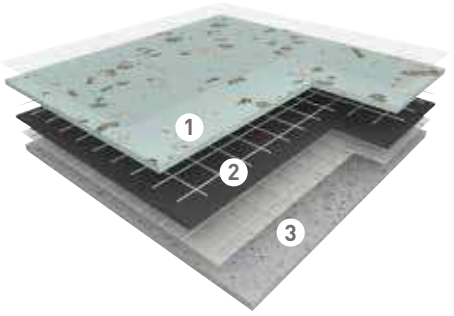

1 100% PURE VINYL PRESSED WEARLAYER


PREMIUM [1]




(1) Identical scale, enlarged 200 times

- > 1 mm
- Pressed under **800** tonnes
- 100 % PVC
- No transparent wearlayer


OTHER FLOORING[1]




Printed flooring with transparent wearlayer
Air bubbles: dirt traps



Homogeneous flooring
Fillers: fragile and subject to scratches



Coated flooring
Irregular density: dirt traps



Rubber flooring
Porous and elastic: lower wear resistance and difficult to maintain



	Wear resistance	Scratch resistance	Soiling resistance	Colour durability	Yellowing effect resistance
PREMIUM	★★★	★★★	★★★	★★★	★★★
Printed multilayered	★	★★	★	★★	★
Homogeneous	★	★	★★	★★	★★
Coated multilayered	★★	★★	★	★★	★★
Rubber	★	★★	★	★	★★

2 DOUBLE GLASS FIBER GRID REINFORCEMENT

PREMIUM



Perfect stability


OTHER FLOORING



Fragile veil: lower stability


3 VERY HIGH DENSITY FOAM

PREMIUM

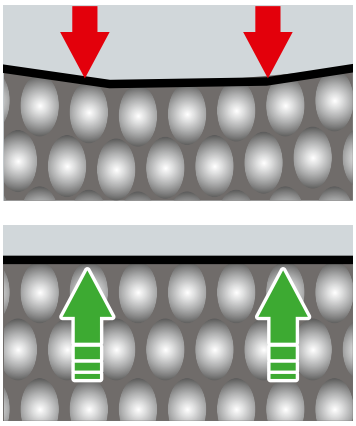

Closed and regular ovoid cells ease the roll of heavy loads

OTHER FLOORING

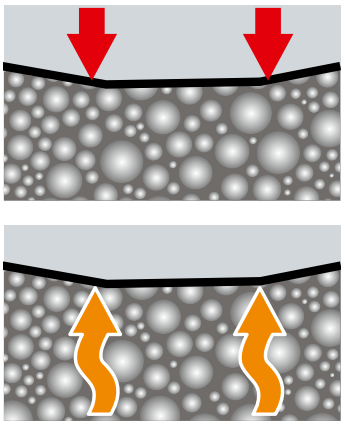

Irregular shaped and sized cells reduce the resistance to indentation




		Ease of rolling	Dimensional stability	Resistance to indentation
PREMIUM	Double glass fiber grid Very high density foam	★★★	★★★	★★★
Other flooring	Standard veil Standard foam	★	★	★ ★


WHEN DESIGN MEETS THE BEST OF TECHNOLOGIES!

EVERCARE™ SURFACE TREATMENT
STAIN BARRIER & EASY MAINTENANCE & HYGIENE

HIGH DENSITY **PRESSED** WEARLAYER
PRESSED UNDER 800 TONS FOR AN **UNRIVALLED DURABILITY**

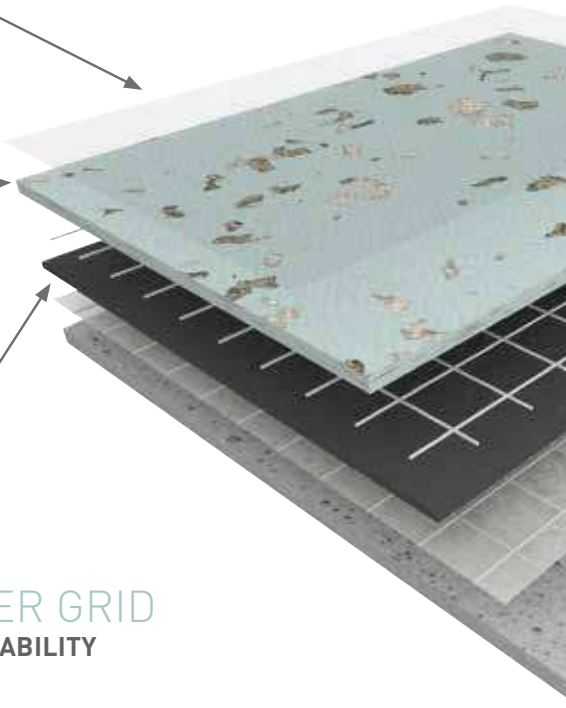

DOUBLE GLASS FIBER GRID
THE BEST DIMENSIONAL STABILITY

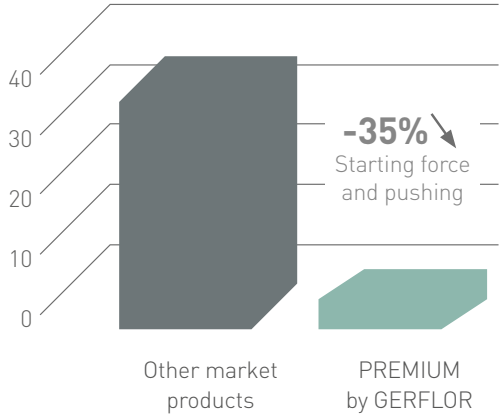


EASY ROLLING OF HEAVY LOADS

Premium floorings offer the best dynamic indentation: **starting force and pushing are reduced by 35% in comparison with other floorings.**

LARGE CHOICE OF
DESIGNS & COLORS

MATT EFFECT
FOR A **MODERN LOOK**

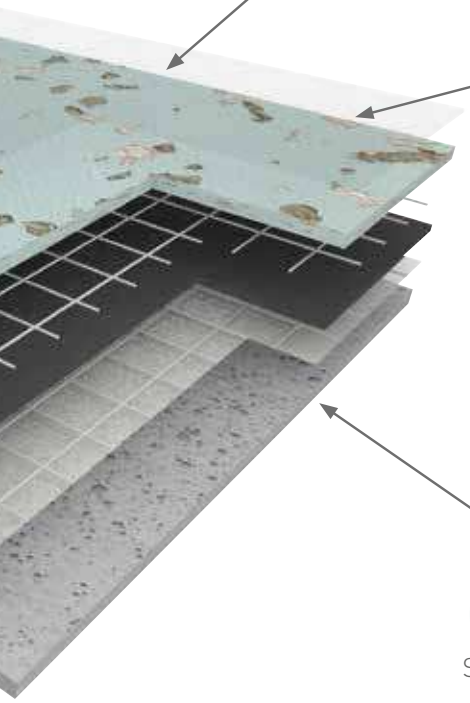

VHD FOAM OR
COMPACT UNDERLAYER
SOUND INSULATION AND **EASY ROLLING**

THE BEST INDENTATION RESISTANCE / ACOUSTIC PERFORMANCE

Gerflor floorings offer a very good indentation and pressure point loading resistance (bed or furniture etc.)

Combined acoustic and walking comfort for calming and relaxing areas.



COMPACT VERSION
8dB

Indentation: 0.02 mm



COMFORT VERSION
17dB

(Metallica: 16dB)
Indentation: 0.06 mm



EASY MAINTENANCE

Proven efficiency

EVERCARE™ technology, an exclusive patented Technology by Gerflor:
ease of maintenance, no need for wax and polish for life, water and detergent savings, plus **3 additional benefits:**

1 STAIN SHIELD, BLOCKS EVEN THE TOUGHEST STAINS

Gerflor floorcovering with **EVERCARE™**



The **EVERCARE™** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Eosin and Betadine, hydro-alcoholic gels, etc.), remaining on the surface.

Other floorcovering



All other product on the market let staining product penetrate the floor covering.



Marker / Eosin / Betadine



STAINING TESTS



AFTER CLEANING

RESULTS AFTER CLEANING


Using a neutral detergent or an eraser for marker	PREMIUM	Printed flooring / transparent wearlayer	Homogeneous flooring	Coated flooring	Rubber flooring
After **10 min →**					
After **1h →**					


Complete stain resistance table available on request

2 NO WAX REQUIRED

= SAVED WATER AND DETERGENT

10x less cleaning products to maintain Gerflor floor coverings compared with a non-treated floorcovering.

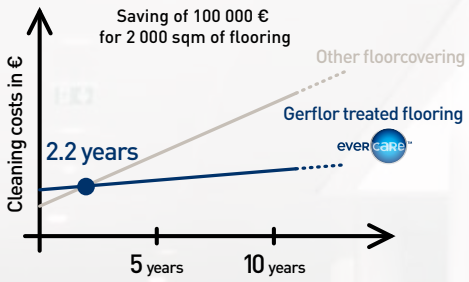


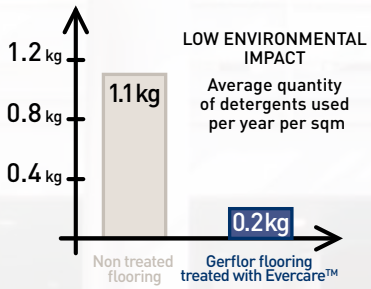

3 MATT EFFECT FOR A MODERN LOOK

PREMIUM DRY-TEX™

The solution for high moisture subfloors

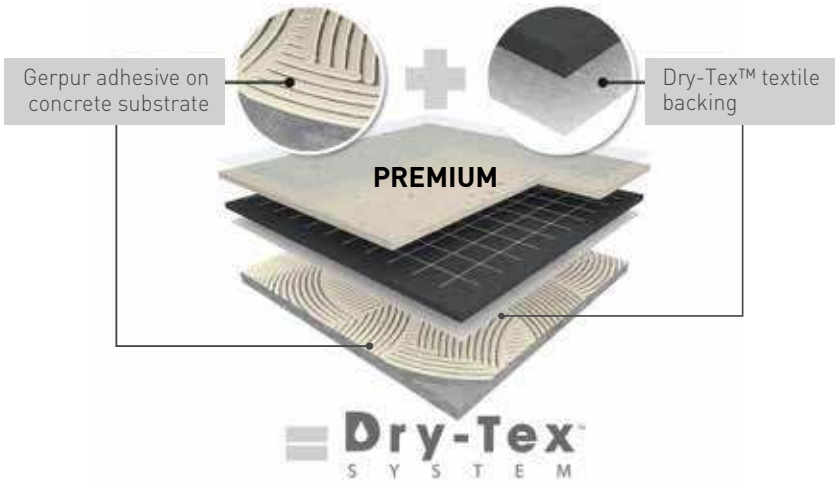


EMERGENCY DEPARTMENTS


- Reception areas
- Waiting rooms
- Corridors


HIGH MOISTURE SUBFLOORS

Proven resistance up to 98% RH / 15 lbs moisture according to ASTM F2170 & ASTM F1869

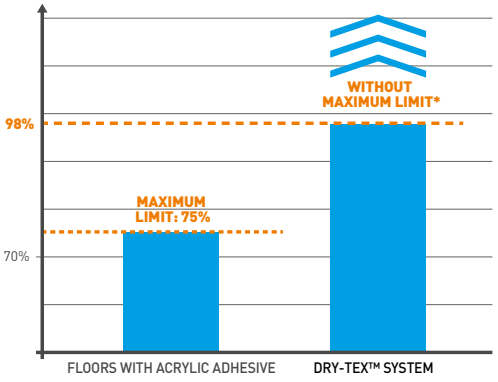


4 REFERENCES AVAILABLE FROM STOCK


4343 Tokelau


8053 Anambas


4004 Pago


4003 Tao

All Premium Compact designs are available as Premium Dry-Tex™ for a minimum order quantity of 2400 sqm*

*For any project please contact your Sales Representative for further technical information



PREMIUM DRY-TEX™ is **the best alternative to the installation of an interposition barrier which ensures:**

Financial savings: up to 25% cheaper!
- Reduced labour and material cost

Time savings: a few minutes instead of several weeks!
- Reduced screed drying
- Reduced substrate preparation
- Easy installation

Performance
- Excellent moisture resistance
- Resistance to heavy traffic

Comfort and safety
- Easy rolling of beds and stretchers
- Slip resistance
- Acoustic insulation (compared to ceramic tiles)

ATTRACTION® TILES

The Premium solution for renovation



- **INSTALLATION ON ANY TYPES OF SURFACE***
- **SOLUTION FOR ASBESTOS SUBFLOOR** a
- **HARD-WEARING MODULAR TILES**


  635 x 635 mm


- **FAST INSTALLATION: NO NEED TO STOP WORK**


* for further information please refer to our documentation "Attraction®"

REFERENCES AVAILABLE IN STOCK



BRAZILIA - 8577 Amazonas


BRAZILIA - 8157 Goias


INDIANA - 4146 Moheli


INDIANA - 4476 Wattaru



BRAZILIA - 3709 Ceara


BRAZILIA - 4342 Juara


BRAZILIA - 8386 Boa Vista


INDIANA - 4343 Tokelau



OSMOZ - 4351 Greige



INDIANA - 8053 Anambas


BRAZILIA - 8736 Recife



INDIANA - 4003 Tao


INDIANA - 4004 Pago



BRAZILIA - 3707 Paraiba


INDIANA - 8837 Songo


NEW DESIGN 6 NEW COLOR REFERENCES


NEOPOLIS - 2745 Plaza


NEOPOLIS - 2744 Queens Soft


NEOPOLIS - 2740 Harlem Soft


NEOPOLIS - 2742 Times Square


NEOPOLIS - 2743 Central Park


NEOPOLIS - 2744 Brooklyn

Attraction® tiles: **ask for a unit sample**. Technical data sheet & product description available on gerflor.com

COMPLETE SOLUTION


100% coordination floors / walls / finishes


100% SAFETY
LINEA'TOUCH handrail

100% PROTECTION
Mural Ultra combined with LINEA'punch bumper

100% WATERPROOF
Perfect hot-welded joint between floor and wall

100% HYGIENIC
- No areas where particles or bacteria can stagnate
- Easy to clean

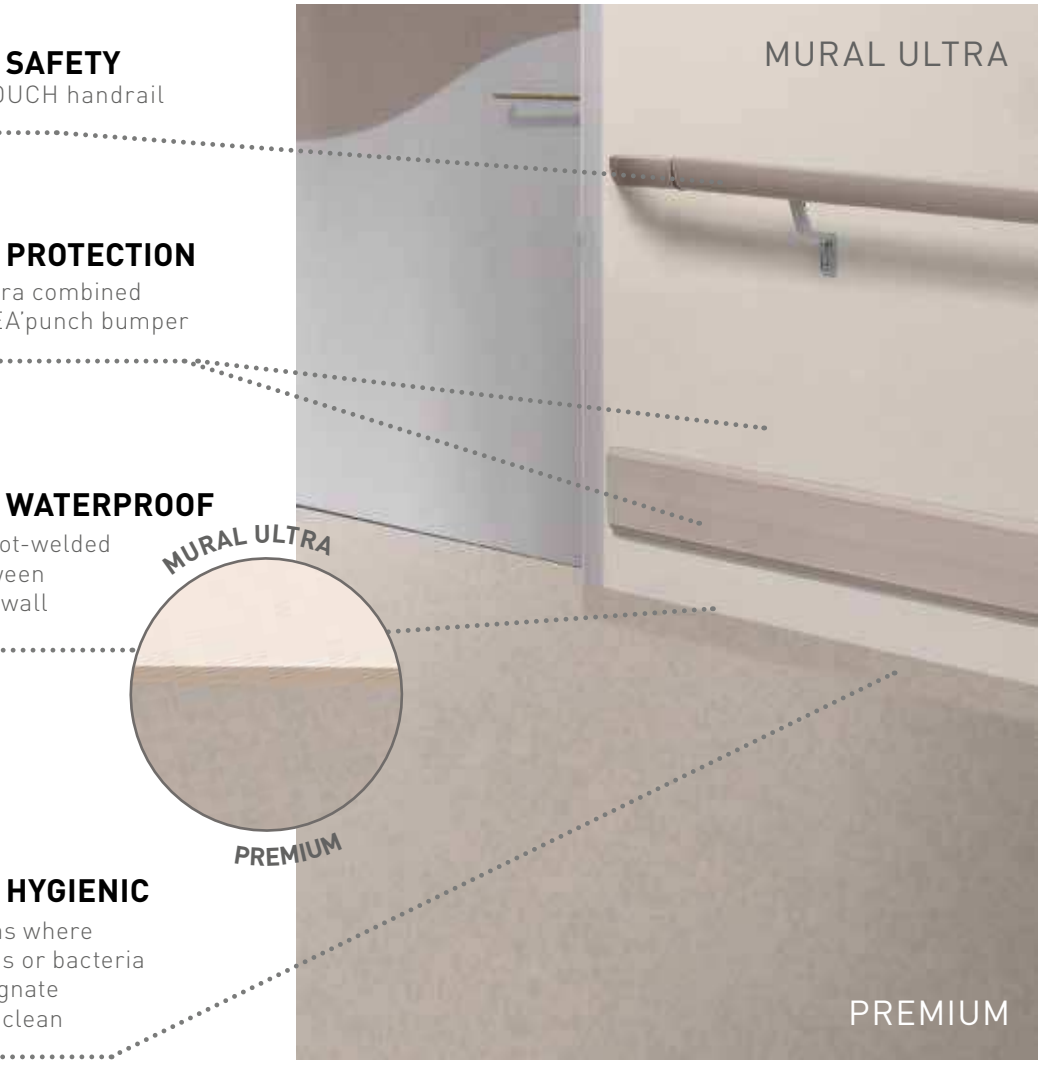

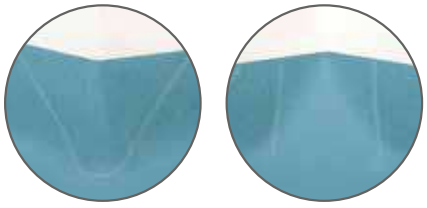

CLEAN CORNER SYSTEM

Patent pending system.






For further information, see the SPM and «Commercial flooring solutions» catalogues.


STAIRCASE SOLUTIONS

- Stair nosing

100% LANDING/
STAIR HARMONY



PVC




ALU

- Complete step


TARASTEP
17dB

70%
CONTRAST

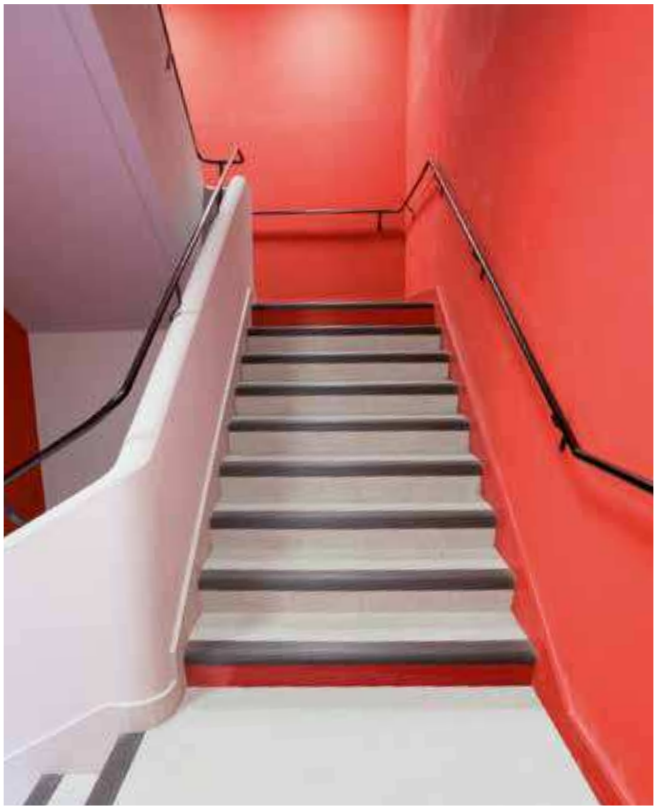

ACCESSIBILITY SOLUTIONS

- Warning strips
- Orientation strips



For further information,
see the «A global solution
for accessibility» brochure.

ROMUS ENTRANCE MATS

- Reduce dust
- Prevent premature soiling & wear
  of floor coverings






For further information, see the
«Commercial flooring solutions» catalogue.

NEW PREMIUM COLLECTION


FOR AESTHETIC, SOOTHING AND SMOOTH AREAS

Trendy colors and designs. Our Design Department works with a lot of designers, architects and colorists from all around the world to anticipate new decoration trends and to develop new designs and colors.

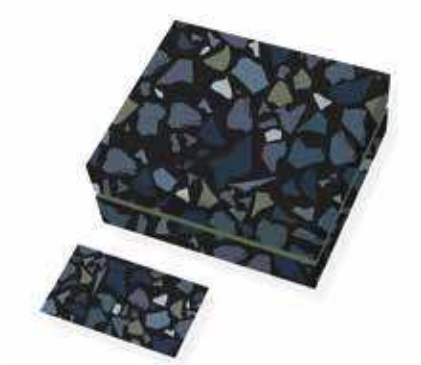




2 NEW DESIGNS BASED ON TERRAZO TREND



POESY
Random terrazo effect thanks to pearly and metallic flakes




NEOPOLIS
- Raw terrazo effect with neutral and very urban tones
- Transparence effect to bring depth and emphasis



135 REFERENCES

50% NEW


6 DESIGNS




Brazilia




Osmoz



Poesy



Metallica



Indiana




Neopolis


POESY



NEW STANDARDS
LIGHTNESS
POETIC SOFTNESS
ORIGINAL



7109 Idylle



2747 Ballade



2748 Refrain




2749 Lyrique



2752 Litote




8626 Rime




8627 Allegorie



8621 Ode



2750 Ellipse



2751 Slam

Compact sheet Comfort sheet

NEOPOLIS



MASKING EFFECT
HIGHLIGTHING
MATERIAL **RAW**
UNEVEN URBAN



2743 Central Park




2744 Queens Soft



2742 Times Square



2741 Brooklyn

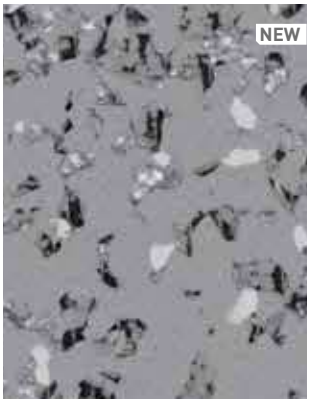

2740 Harlem Soft



2745 Plaza

Compact sheet Comfort sheet Attraction

OSMOZ





TONE-ON-TONE
UNIVERSAL **NEUTRAL**
SOOTHING EFFECT
ALMOST PLAIN COLOR

4364 Ivory New



4365 Alpaga New


3792 Storm Grey


3791 Slate Grey


4350 Elefant


4349 Angora


4351 Greige



7735 Coffee Brown


8073 Cocoa



7737 Pepper Grey



0356 Denim


4496 Pacific Blue



7108 Grenadine



0702 Kumquat



7204 Mimosa


4527 Bamboo

Compact sheet Comfort sheet Attraction


METALLICA




METALLIC EFFECT

3D

CRYSTAL URBAN POTENTIAL ARCHITECTURAL


8059 Nicobar


8150 Bali


4343 Tokelau*


8262 Rodrigues


4009 Tufoa


8226 Fidji



8053 Anambas*


3788 Nauru


4002 Manua


4001 Ofu


7517 Faroe


8470 Samoa


8837 Songo



4004 Pago*




4003 Tao*



4526 Lasia


4469 Pemba


8850 Maupiti


4476 Wattaru


4135 Aldabra


4015 Guinea


8256 Tahaa


4142 Penang



4146 Moheli


8194 Kornati

Compact sheet Comfort sheet Attraction

**Product available as Premium & Gerflor Dry-Tex System.*

INDIANA

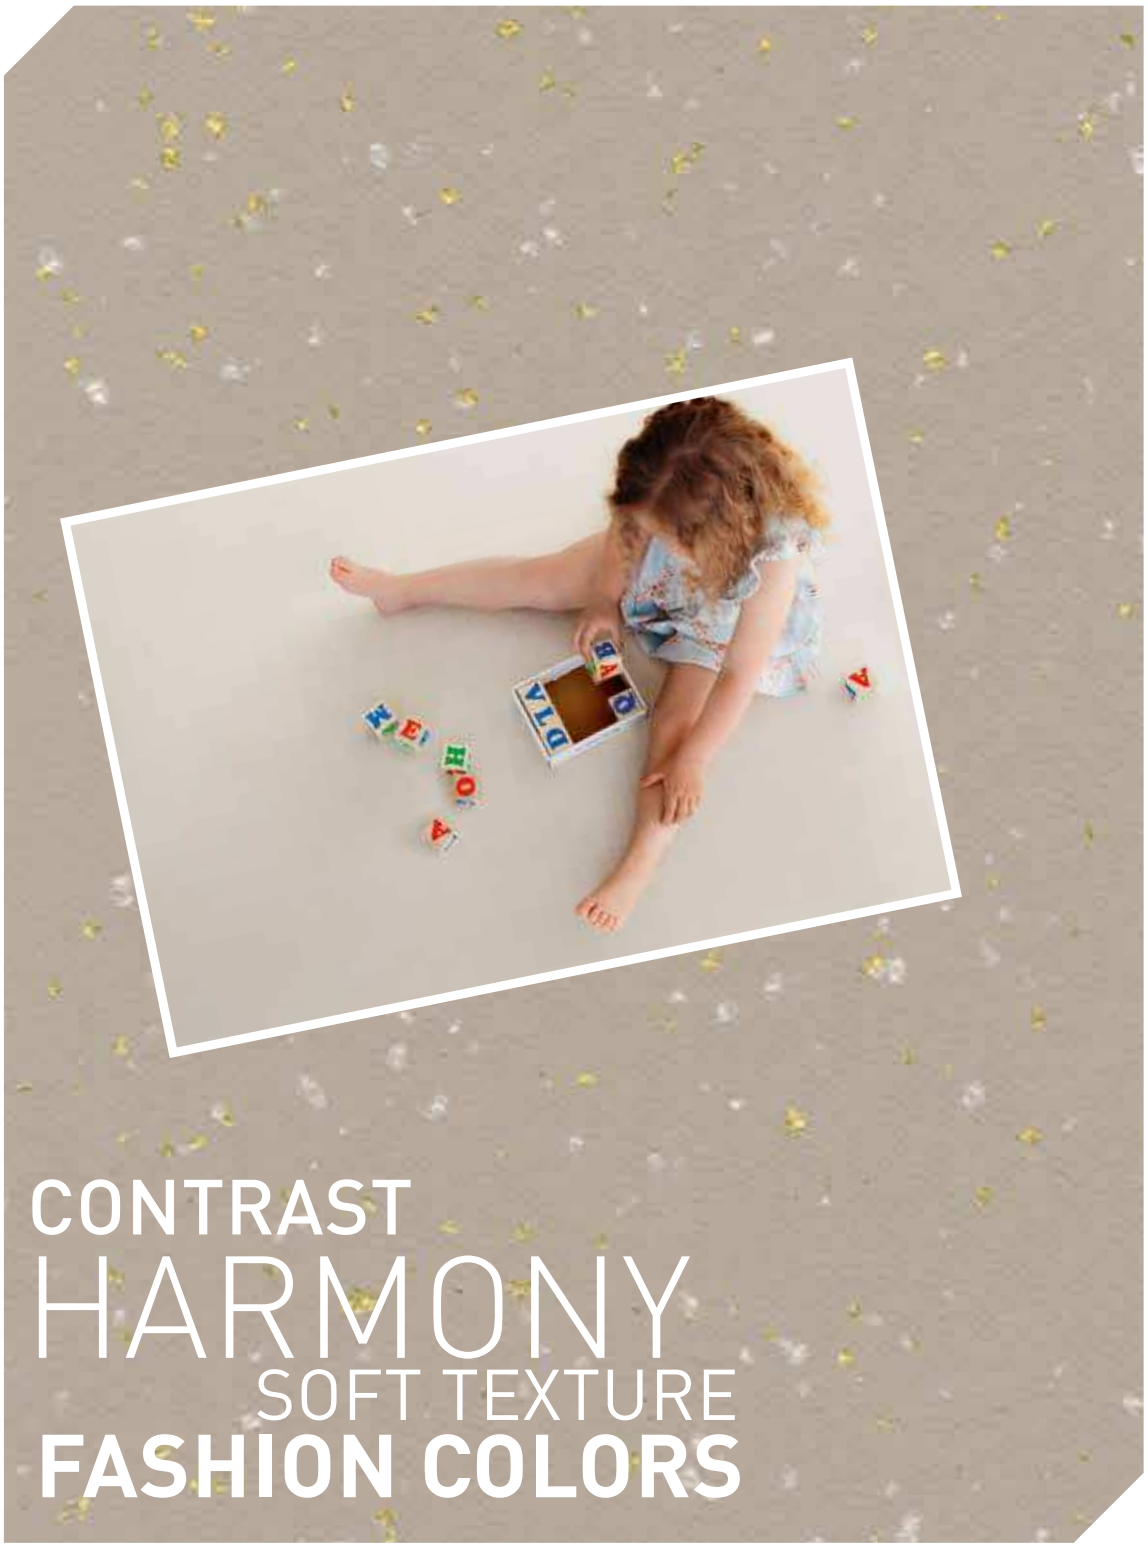


CONTRAST

HARMONY

SOFT TEXTURE

FASHION COLORS



9745 Cosmic




9310 Tethys




9753 Energy



9330 Moon




8257 Nyx



2746 Ymir




8623 Sedna



8624 Triton



9719 Eclipse



8625 Naïade


Compact sheet Comfort sheet

BRAZILIA



ORIGINAL LIGHT
PREMIUM STORY CHEERFUL
GRANITE EFFECT



3709 Ceara


8736 Recife


3734 Almerim


8386 Boa Vista


4342 Juara


4329 Bacabal


3707 Paraiba


4478 Copacabana


4477 Maceio


8577 Amazonas


8269 Ipanema


8157 Goias


4136 Sao Luis

Compact sheet Comfort sheet Attraction

My Premium

Customize your floor!


1 **SELECT** A DESIGN TYPE


Brazilia



Indiana


Osmoz


Poesy


Neopolis


2 **CHOOSE** YOUR GRANULES: PALETTE

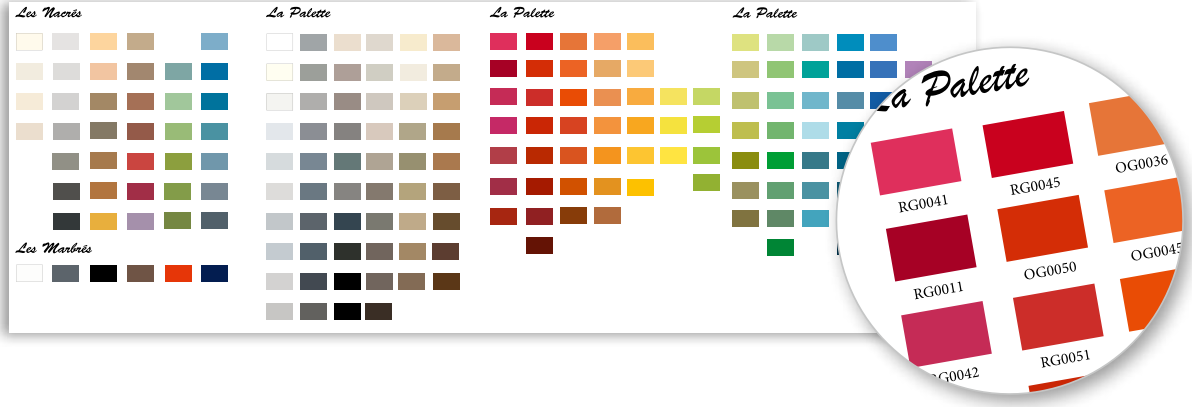

3 **VISUALIZE** YOUR DESIGN AND ORDER ONLINE ON

mypremiumbygerflor.com



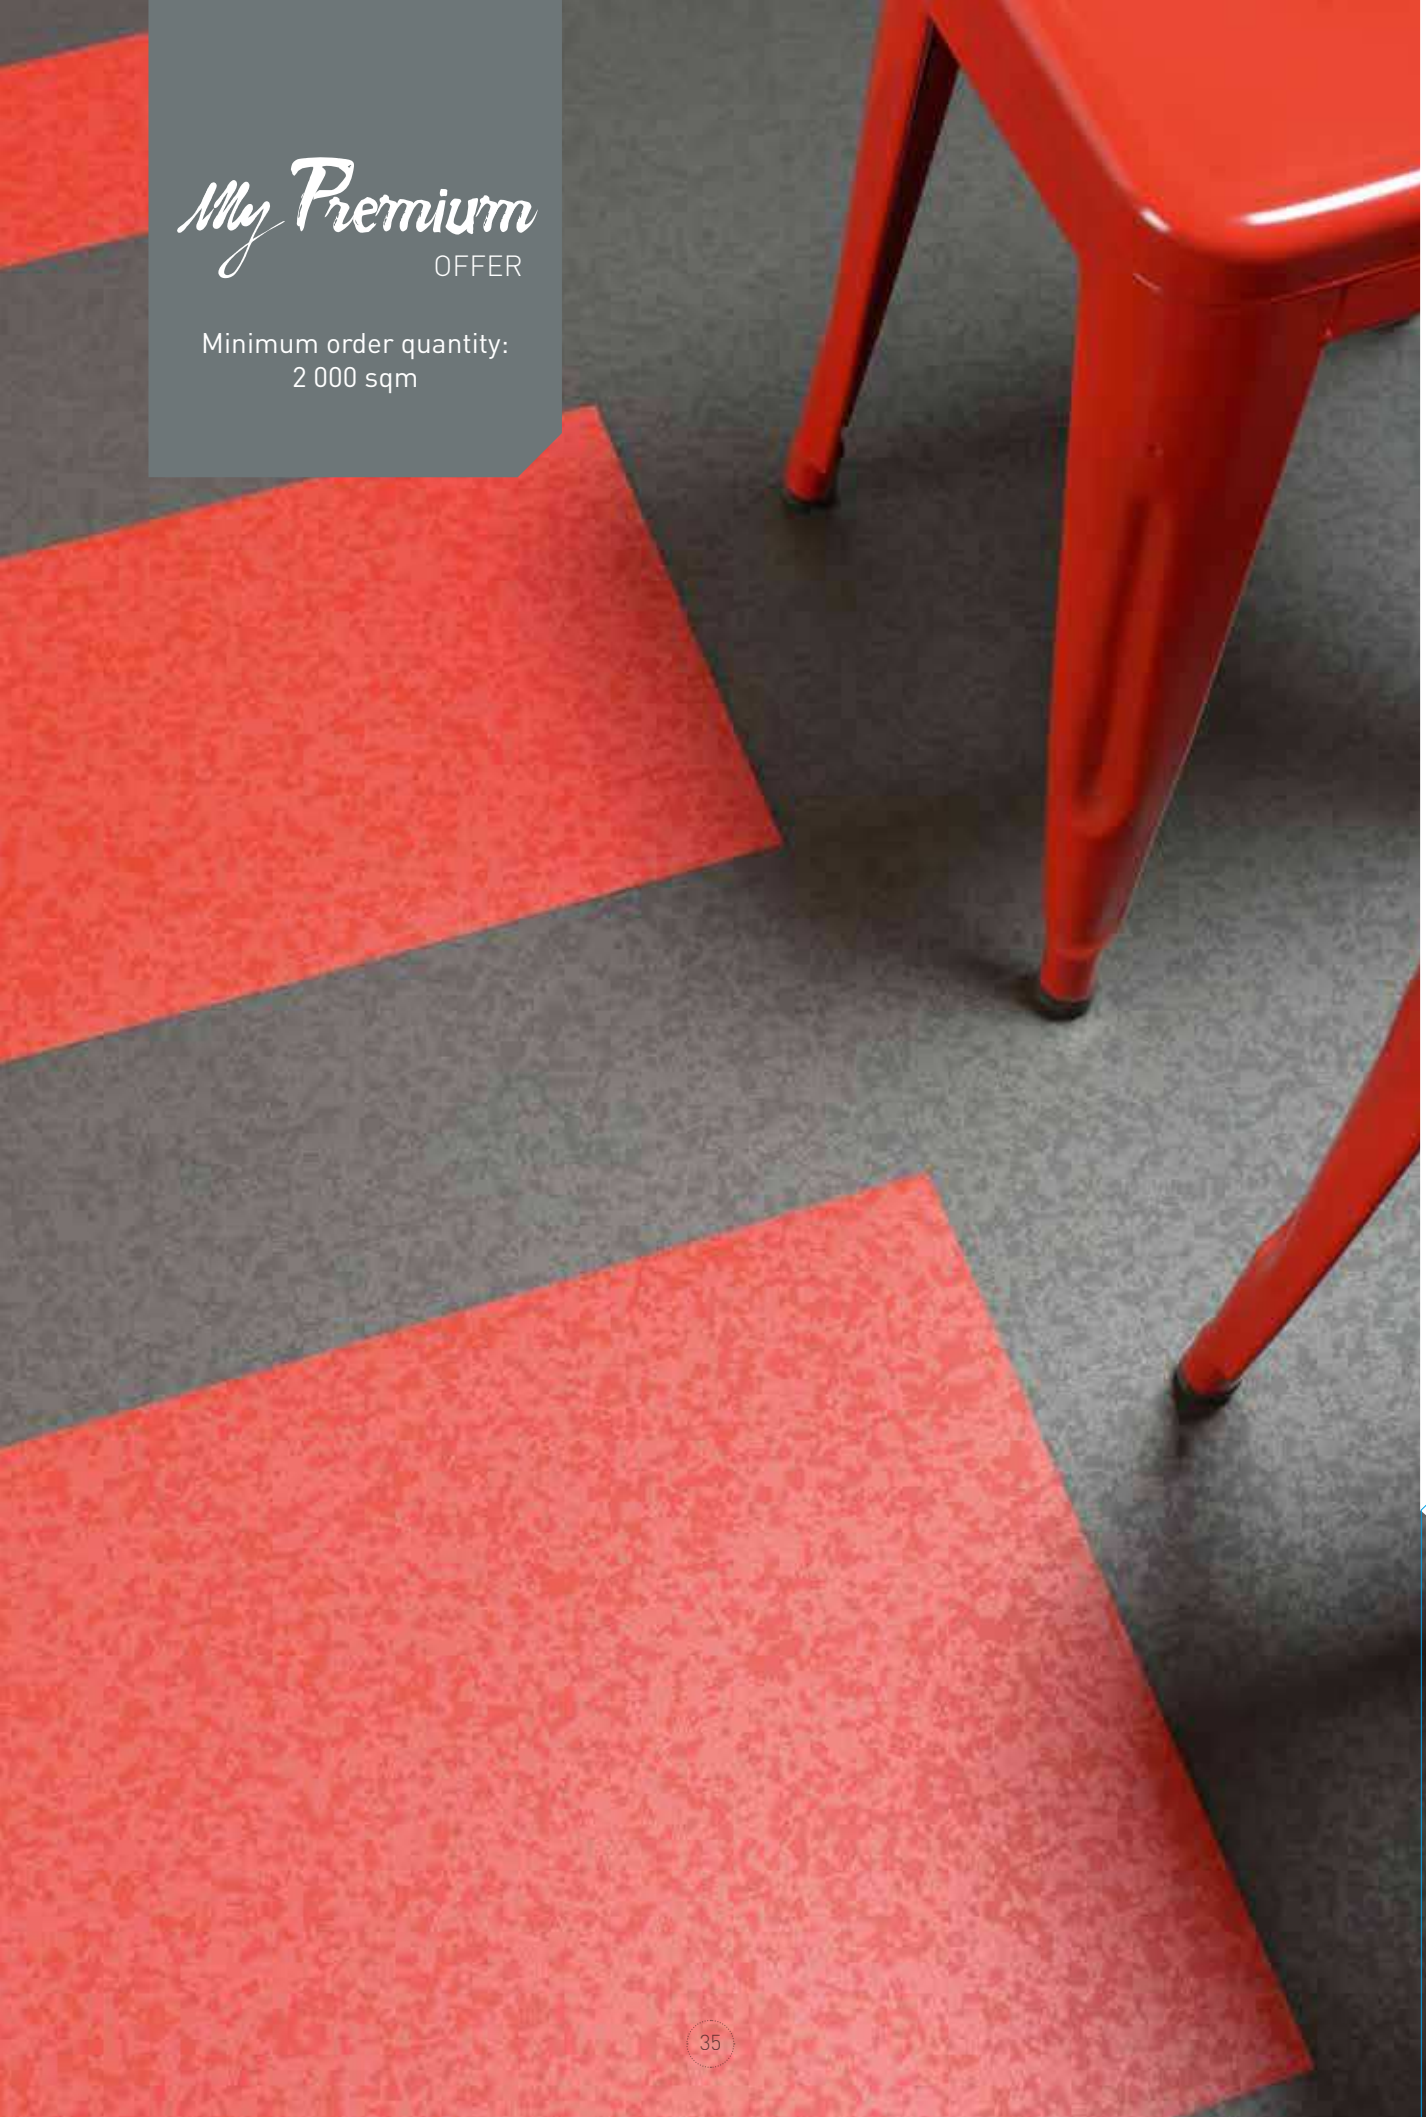

My Premium
OFFER

Minimum order quantity:
2 000 sqm



My Premium
OFFER

Minimum order quantity:
2 000 sqm



My Premium
OFFER

Minimum order quantity:
2 000 sqm

A SUSTAINABLE CHOICE

THE BEST INDOOR AIR QUALITY

- **VOC EMISSIONS < 10µg / m³ AFTER 28 DAYS**
  → 100 TIMES LOWER THAN NORM REQUIREMENTS
- **M1 AND FLOORSCORE CERTIFIED**
- **TESTED BY AN INDEPENDANT LAB** eurofins

  The lab confirmed the emissions are below detection levels!
  ATTRACTION® <2 µg/m³ (TVOC after 28 days)
  PREMIUM COMFORT <3 µg/m³ (TVOC after 28 days)

PRODUCT COMPOSITION

- **100% REACH COMPLIANT**
- **PHTHALATE FREE***


RECYCLING

- **100% RECYCLABLE**
- **MADE WITH 53% RECYCLED CONTENT**
  (including post manufacturing and post consumer waste)

THE BEST LIFE CYCLE ANALYSIS

- **LESS WATER AND DETERGENT USE THANKS TO EVERCARE™**
- **LESS ENVIRONMENTAL IMPACT, LESS COSTS**

*except recycled content

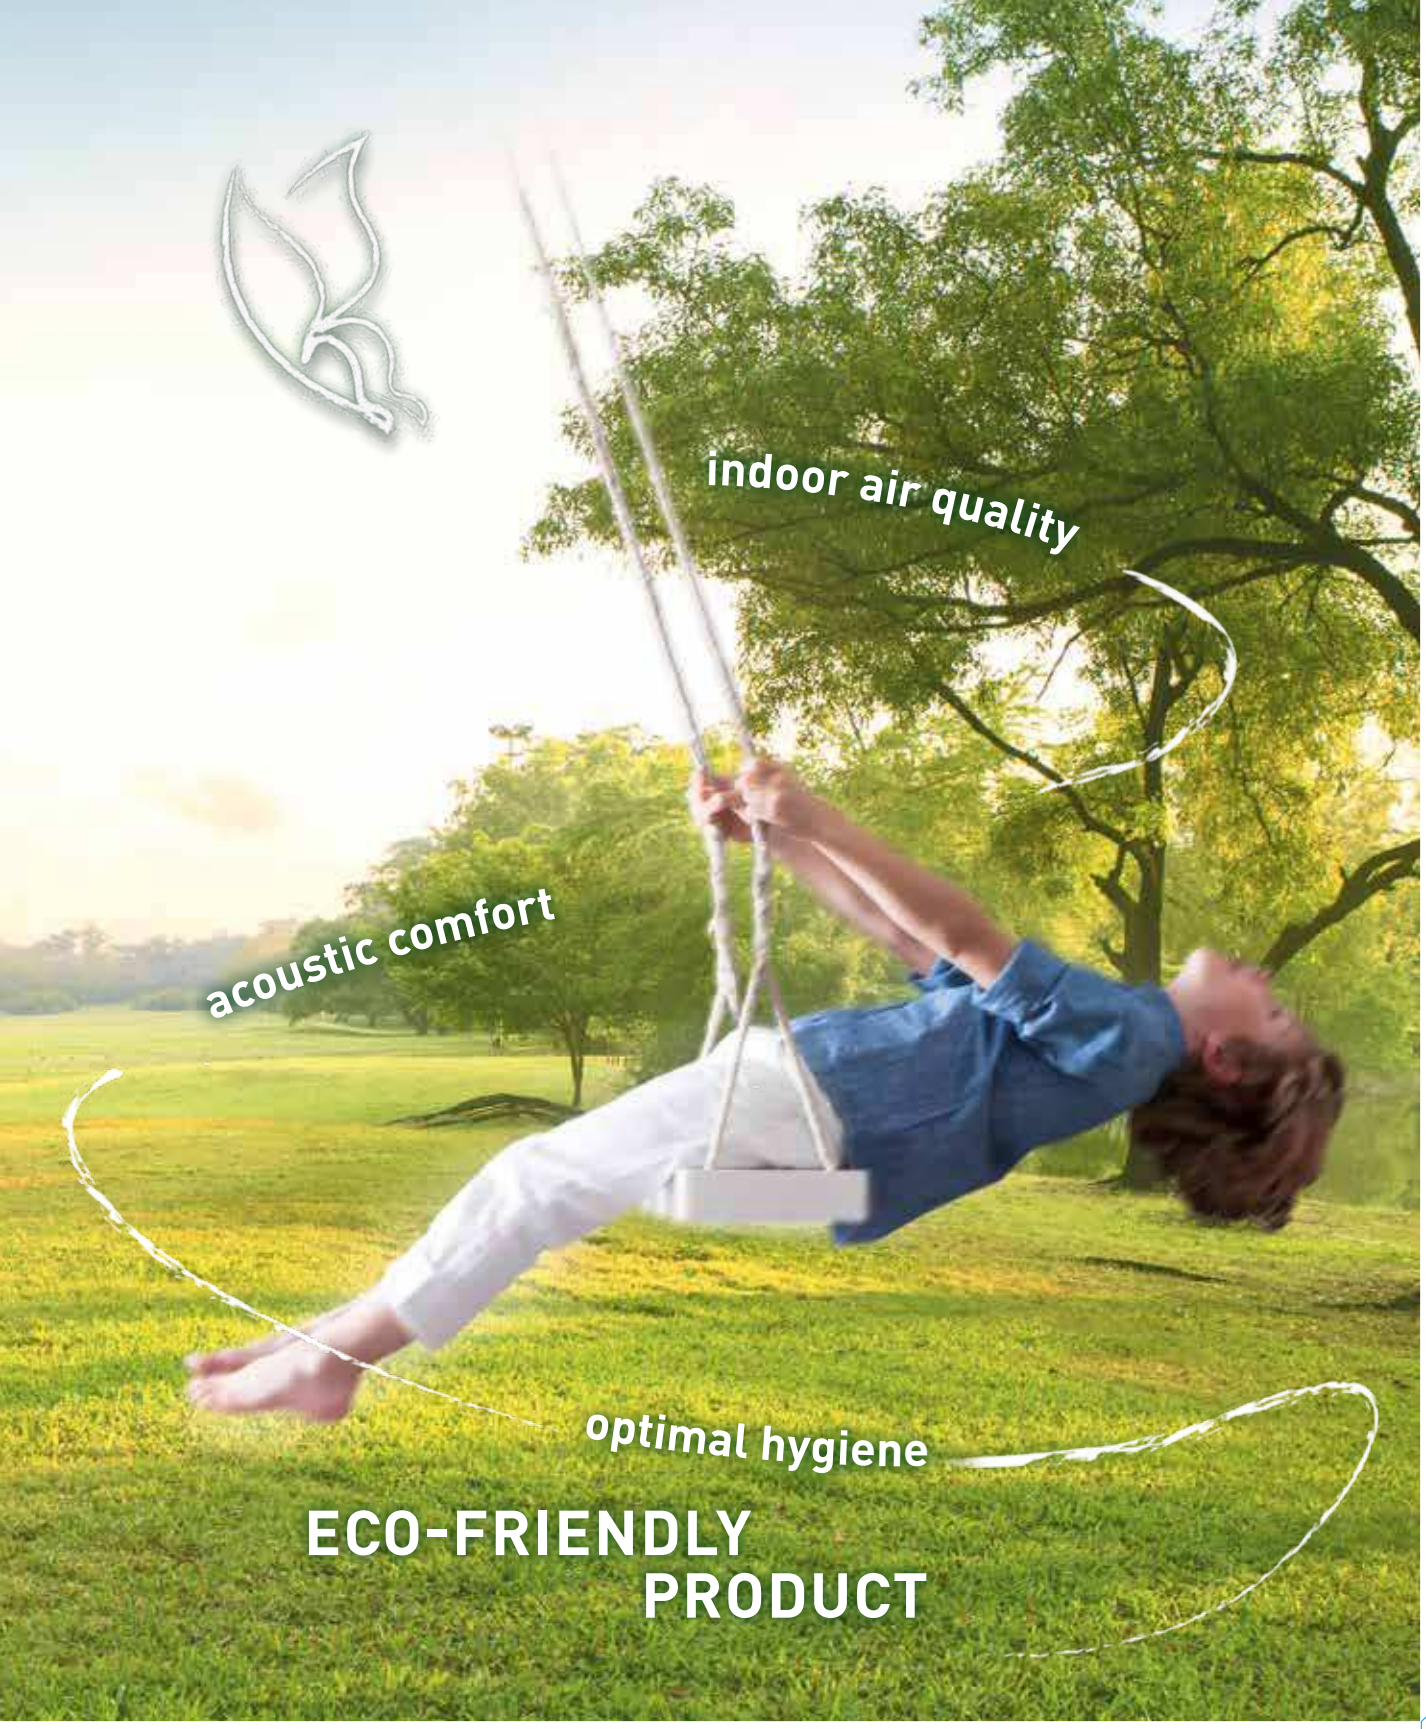
indoor air quality
acoustic comfort
optimal hygiene
ECO-FRIENDLY
PRODUCT

GERFLOR, THE PARTNER
FOR ALL YOUR PROJECTS!



Make life easier!

WITH OUR EXPRESS DEPARTMENT

If you have technical questions
or would like to request samples
or documentation, contact:

By email: **gerflorcontract@gerflor.com**
By phone: **+33(0) 474 054 000**
By fax: **+33(0) 474 050 313**



TRAINING CENTRE OPEN TO ALL PROFESSIONALS

Dedicated to training young professionals and providing CPD for experienced professionals.

CUSTOMIZED TECHNICAL SUPPORT

Our technicians will come to you to provide on-site support.


ONLINE SERVICE

In just a few clicks, you'll find a whole range of tools to make your life easier on our website.

WELDING ROD AND FLOORING MATCHING TOOL

http://www.gerflor.com/servicesprofessionals/welding-rods-matching.html



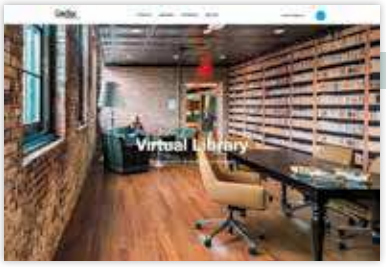

VIRTUAL LIBRARY

See our documentation on line

http://www.gerflor.com/servicesprofessionals/virtual-library.html

DESIGN STUDIO: REAL-TIME SIMULATIONS

Interior Designer

Choose your interior, insert your Gerflor floor covering and see the finished effect in situ on:

http://www.gerflor.com/services/professionals/interior-designer.html



CUSTOMISED FLOORINGS, LOGOS...

For more information please contact your Gerflor Representative



			Taralay PREMIUM COMPACT	Taralay PREMIUM COMFORT	ATTRACTION®	Taralay PREMIUM DRY-TEX™
			Brazilia - Indiana - Metallica - Osmoz - Poesy - Neopolis	Osmoz - Indiana - Metallica - Brazilia - Poesy - Neopolis	Osmoz - Indiana - Brazilia	
DESCRIPTION						
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	3.00 - 3.30	5.00	2.50
	ASTM F386-02	inch	0.08	0.12 - 0.13	-	-
Wearlayer thickness	EN ISO 24340 (EN 429)	mm	>1	>1	1.00	1.02
	ASTM F410-02	inch	⩾ 0.039	⩾ 0.039	-	-
Weight	EN ISO 23997 (EN 430)	g/sq.m	2580-2680	2800-3260	7460	2660
	-	lbs/sq.ft	0.53 – 0.57	0.58	-	-
Width of sheet	EN ISO 24341 (EN 426)	cm	200	200	-	200
	-	feet - inch	6'6''	6'6''	-	-
Length of sheet	EN ISO 24341 (EN 426)	lm	20	25	-	20
	-	feet - inch	66'	82'	-	-
Tile size	EN ISO 24342 (EN 427)	mm	-	-	635 x 635 Connect 600 x 600 Cleantech (without dovetail) [4]	-
CLASSIFICATION						
Norm / Product specification	-	-	EN ISO 10582 (EN 649)	EN 651	EN ISO 10582 (EN 649)	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43	34-42	34-43	34-43
Fire rating	EN 13501-1	class	B_{fl}-s1	C_{fl}-s1	B_{fl}-s1	B_{fl}-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance [1]	DIN 51 130	class	R10	R10	R10	R10
PERFORMANCE						
Wear resistance	EN 660.2	mm^3	⩽ 2.0	⩽ 2.0	⩽ 2.0	⩽ 2.0
Wear group	NF 189	group	T	T	T	T
Type binder content	EN ISO 10582	type	I	-	I	I
Dimensional stability	EN ISO 23999 (EN 434)	%	⩽ 0.40	⩽ 0.40	⩽ 0.25	⩽ 0.40
Residual indentation (requirement)	EN ISO 24343-1 (EN 433)	mm	⩽ 0.10	⩽ 0.20	⩽ 0.10	⩽ 0.10
Residual indentation (measure)	-	mm	≈ 0.02	≈ 0.06	-	≈ 0.03
Impact sound insulation	EN ISO 717-2	dB	8	17 (Metallica: 16)	-	8
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degré	⩾ 6	⩾ 6	⩾ 6	⩾ 6
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™
Chemical products resistance [2]	EN ISO 26987 (EN 423)	-	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) [3]	ISO 22196	-	> 99 % inhibits growth	> 99 % inhibits growth	-	> 99 % inhibits growth
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	$\mu g/m^3$	<10	<10	<10	<10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE MARKING						
CE	EN 14041		DS B_{fl}-s1	DS C_{fl}-s1	DS B_{fl}-s1	DS B_{fl}-s1

(1) Please refer to Tarasafe ranges.
(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
(3) The implementation of an effective cleaning regime is the most important defence against infection.
(4) Available upon request

PREMIUM COMPACT

The floor covering is made of a **>1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips,** with a **matt finishing** and **without a transparent wear layer**.

It offers a T group wear rating and is available in 2 m wide sheet.

Its compact backing is calendered, pressed and reinforced with a glass fibre grid yielding.

It offers a **8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness**.

PREMIUM COMPACT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.

PREMIUM COMFORT

The floor covering is made of a **>1mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips,** with a **matt finishing** and **without a transparent wear layer**.

It offers a T group wear rating and is available in 2 m wide sheet.

The product contains a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid.

It offers a **16 dB sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness**.

PREMIUM COMFORT is treated with **Evercare™**, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content ; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6)**.

It is 100% recyclable.

CODE	DESIGN	COLORS	LRV	NCS
3734	BRAZILIA	Almerim	52,3	2000-N
8577	BRAZILIA	Amazonas	44,0	2040-G70Y
4329	BRAZILIA	Bacabal	25,9	4005-Y80R
8386	BRAZILIA	Boa Vista	63,7	1002-Y50R
3709	BRAZILIA	Ceara	30,4	4005-R80B
4478	BRAZILIA	Copacabana	16,4	4030-B
8157	BRAZILIA	Goias	29,8	2060-Y50R
8269	BRAZILIA	Ipanema	47,3	2040-Y20R
4342	BRAZILIA	Juara	52,5	2002-Y50R
4477	BRAZILIA	Maceio	35,7	2030-B10G
3707	BRAZILIA	Paraiba	10,1	7005-R80B
8736	BRAZILIA	Recife	54,8	2005-R80B
4136	BRAZILIA	Sao Luis	16,2	2060-Y80R
4135	INDIANA	Aldabra	18,0	4020-R60B
8053	INDIANA	Anambas*	22,9	5005-Y20R
8150	INDIANA	Bali	39,2	3005-Y50R
7517	INDIANA	Faroe	20,4	6010-G30Y
8226	INDIANA	Fidji	35,6	3502-Y
4015	INDIANA	Guinea	50,0	2030-G70Y
8194	INDIANA	Kornati	11,7	1580-R
4526	INDIANA	Lasia	41,5	1050-G
4002	INDIANA	Manua	63,0	1502-B
8850	INDIANA	Maupiti	35,2	2040-B
4146	INDIANA	Moheli	13,9	3060-Y80R
3788	INDIANA	Nauru	42,0	2502-Y
8059	INDIANA	Nicobar	21,8	5010-Y60R
4001	INDIANA	Ofu	88,7	0502-Y
4004	INDIANA	Pago*	15,0	6502-B
4469	INDIANA	Pemba	27,9	3040-B40G
4142	INDIANA	Penang	23,5	1080-Y60R
8262	INDIANA	Rodrigues	33,8	3020-Y30R
8470	INDIANA	Samoa	12,3	7502-G
8837	INDIANA	Songo	7,3	8000-N
8256	INDIANA	Tahaa	56,5	1060-Y10R
4003	INDIANA	Tao*	27,5	4502-B
4343	INDIANA	Tokelau*	46,7	2005-Y50R
4009	INDIANA	Tufoa	66,3	1005-Y20R
4476	INDIANA	Wattaru	12,4	5030-R90B
9745	METALLICA	Cosmic	28,4	5502-B
9719	METALLICA	Eclipse	11,3	8502-B
9753	METALLICA	Energy	56,3	2502-G
9339	METALLICA	Moon	47,9	3005-Y50R
8625	METALLICA	Naiade	19,2	4040-B
8257	METALLICA	Nyx	28,0	4030-Y20R
8623	METALLICA	Sedna	22,5	4030-G50Y
9310	METALLICA	Tethys	28,1	4502-Y
8624	METALLICA	Triton	16,8	7010-B90G
2746	METALLICA	Ymir	23,9	5030-Y50R
2741	NEOPOLIS	Brooklyn	14,9	7502-B
2743	NEOPOLIS	Central Park	52,3	2005-Y30R
2740	NEOPOLIS	Harlem Soft	30,0	4500-N
2745	NEOPOLIS	Plaza	53,8	2002-B
2744	NEOPOLIS	Queens Soft	29,4	4005-Y50R
2742	NEOPOLIS	Times Square	14,9	7005-Y50R
4365	OSMOZ	Alpaga New	52,2	2002-Y
4349	OSMOZ	Angora	42,2	3005-Y50R
4527	OSMOZ	Bamboo	49,4	1060-G50Y
8073	OSMOZ	Cocoa	10,8	7005-Y50R
7735	OSMOZ	Coffee Brown	16,9	6005-Y50R
0356	OSMOZ	Denim	16,3	5030-R80B
4350	OSMOZ	Elefant	33,1	3500-N
4351	OSMOZ	Greige	25,8	5005-Y50R
7108	OSMOZ	Grenadine	15,3	2070-Y90R
4364	OSMOZ	Ivory New	61,1	1502-Y
0702	OSMOZ	Kumquat	33,7	2050-Y50R
7204	OSMOZ	Mimosa	61,7	1050-Y10R
4496	OSMOZ	Pacific Blue	37,0	1040-B
7737	OSMOZ	Pepper Grey	9,4	8000-N
3791	OSMOZ	Slate Grey	21,7	5500-N
3792	OSMOZ	Storm Grey	36,3	3502-B
8627	POESY	Allegorie	24,8	3030-B10G
2747	POESY	Ballade	43,8	2005-Y50R
2750	POESY	Ellipse	45,1	2502-B
7109	POESY	Idylle	34,2	3020-R10B
2752	POESY	Litote	15,0	6502-B
2749	POESY	Lyrique	16,6	6005-Y20R
8621	POESY	Ode	50,0	1515-B50G
2748	POESY	Refrain	28,8	4005-Y50R
8626	POESY	Rime	20,3	5020-B
2751	POESY	Slam	30,7	4500-N

* Colors available as Gerflor Dry-Tex™ System

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor **Don't forget our complementary ranges!**



Gerflor **Be connected!**

www.gerflor.com

#Gerflor

Réalisation : coco & co - Premium - 06/2018

PREMIUM, **FEWER VOC'S, BETTER INDOOR AIR QUALITY**

COMPOSITION
100% REACH
Phthalate free
(except recycled content)

RECYCLABILITY
100%

INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10 ug/m³ after 28 days)

LCA
Eco-designed according to a product-specific life cycle analysis

WELLNESS
Anti slip R10
Comfort version: Walking comfort < 65 dB (best certification) and impact sound insulation - 17 dB

Gerflor®
theflooringgroup