



FORMATS

With foam backing (Comfort)







ROLL

STEP

Without foam backing (Compact)







ROLL

TILE

INTERLOCKING LOOSELAY TILE

PERFORMANCES

17 dB

R10

SOUND INSULATION IN dB (EN ISO 717/2)

SLIP RESISTANCE WET (DIN 51130)


10⁵

ELECTRICAL RESISTANCE IN Ω : 5 X 10⁴ ≤ Rt ≤ 10⁶ (EN 1081/DIN 51953)

 10^{7}

ELECTRICAL RESISTANCE IN Ω: 10⁶ ≤ Rt ≤ 10⁸ (EN 1081/DIN 51953)





100% RECYCLABLE FLOORING

TREATMENTS



MICRO STRUCTURED CROSS COAT POLIMERISED LASER TECHNOLOGY



POLYURETHANE SURFACE TREATMENT UV CURED STAIN SHIELD MATT EFFECT

Protecsol®

POLYURETHANE SURFACE TREATMENT UV CURED

PUR+ Matt

PUR+

PUR SparClean®

POLYURETHANE SURFACE TREATMENT MATT SURFACE

POLYURETHANE SURFACE TREATMENT

POLYURETHANE SURFACE TREATMENT

POWDER COATED TREATMENT



PROTECTION

CERTIFICATION













ELECTRICAL RESISTANCE









Scale reduction for Wood designs.




- Evercare™ - Mipolam Symbioz™ - Mipolam Planet & Bioplanet - Mipolam Elegance - Mipolam Affinity - Mipolam Affinity - Poesy - Neopolis - Neopolis - Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros - Pure Oak	- Osmoz - Indiana 'ERED	- Mipolam Acc - Mipolam Cos - Mipolam Trop	imo	- Dry	c Premium y-Tex™ System	P.3
- Poesy - Neopolis TARALAY MULTILAY Taralay Libertex - Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros	- Indiana ERED	Taralouluses		- Dry		P.3
- Poesy - Neopolis TARALAY MULTILAY Taralay Libertex - Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros	- Indiana ERED	Tapalayleress		- Dry		
- Neopolis TARALAY MULTILAY Taralay Libertex - Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros	- Indiana ERED	Tapalay leases		- Dry		
- Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros	ect	Taralay Irones -			raction® Premium	
- Amsterdam - Refl - Cocoon - Ska - Hossegor - Legend - Paros	ect	Taralay Images				P.5
- Cocoon - Ska - Hossegor - Legend - Paros		Taralay Impres	sion	► <u>Taralay</u> Initial	► Timberlin	ıe
- Hossegor - Legend - Paros	ndi Oak	- Corner	- Nest	NEW	Wood	
- Legend - Paros		- Kubes	- Trame	- Diversion	- Pixel	
- Paros		- Rice	- Gentlemen	- Miami		
		- Stars - Cemento	- Wood - Leather	- Spider	▶ Tarastep	
- Fure Oak		- Mohair	- Leather - Uni Matt	- Urban - Strada		
		Mondi	OIII Matt	- Wood		
ODEATION						
CREATION LVT						P.1
► Creation 70		► Creation 55		► Creation 30		
- Creation 70 - Creation 70 Clic		- Creation 55	Nic	- Creation 30 - Creation 30 Clic	-	
- Creation 70 Looselay		- Creation 55 Clic - Creation 55 Looselay				
- Creation 70 Connect			ooselay Acoustic	► Rigid 30 Lock	-1	
► Saga²		► Rigid 55 Loc	K ACOUSTIC	► TopSilence Des	ign	
TECHNICAL TILES						P.1
► GTI MAX	► GTI EL5		► Attraction®)		
- GIT MAX			- Neopolis	- Indi	iana	
			- Brazilia	- Osn	noz	
TECHNICAL SOLUTION	NS					P.19
► EL5 / EL7 solutions		► Safety floor	ring	► Shower Syster	m	
Dissipative & conductive floors]	- Tarasafe Geo		- Elegance SD		
- Mipolam EL7		- Tarasafe Ultra & Ultra Comfort		- Tarasafe Ultra I	H2O	
- Mipolam Robust EL7	- Tarasafe Ottra & C - Tarasafe Standard		ındard	- Mural Calypso		
- Mipolam EL5	- Tarasafe Plus/Supe		ıs/Super	► Wall Covering		
- Mipolam Technic EL5		- Tarasafe Ultra H2O				
- GTI EL5				- Mural Ultra - Mural Club		
				- Mural Calypso		
DLW LINOLEUM						P.2
► Compact Linoleum			► Acoustic Linoleum	<u>► Technic</u>	cal Solutions	
- Arabesque	- Lino Art Urban		- Marmorette Acoustic		chanical Traffic Line	odur
- Marmorette	- Lino Art Flow	- Marmorette AcousticPlus			ive Linoleum	
- Colorette - Uni walton	 Lino Art Metalli Lino Art Star 	IC	- Colorette AcousticPlus	S Marmore	ette LCH	
SPORT FLOORING						P.2
	CONNOR SPORT		PORT COURT®	► DLW	► POWERSHOCK	
Synthetic Sport Flooring	Hardwood Floor Systems		itdoor irfaces	Linoleum Sport Flooring	Fitness Rubber Solutions	
FINISHES						P.2
		► Installation		► Sport finishes		
► Finishes		- Shower syst		- Paint and mark	ing for boundary line	25
- Skirting solutions		- Accorcibility				
- Skirting solutions - Stair solutions		- Accessibility				
- Skirting solutions - Stair solutions - Profile solutions		- Acoustic und	derlayers			
- Skirting solutions - Stair solutions - Profile solutions - Welding solutions		- Acoustic und - Specific prod	derlayers ducts			
- Skirting solutions - Stair solutions - Profile solutions		- Acoustic und	derlayers ducts			

Since 1937, Gerflor has designed, manufactured and distributed design-led, innovative and eco-responsible floor coverings and wall protection solutions.

Present in more than 100 countries, with 4,200 employees, 29 subsidiaries and 12 production sites, Gerflor serves many activity sectors including health, education, residential accommodation and sport.


WORLDWIDE PRESENCE FOR BETTER SERVICE



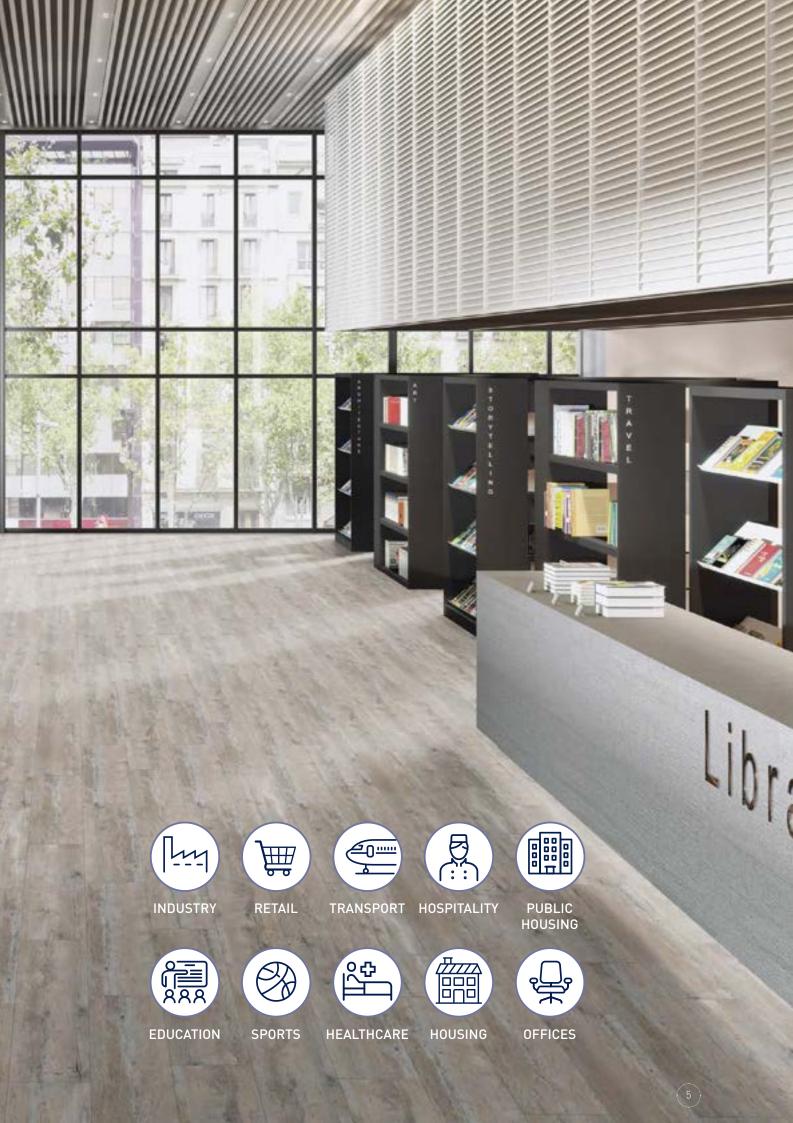

OUR COMMITMENTS FOR A SUSTAINABLE FUTURE

Gerflor teams have always considered customers and the environment as their absolute priorities. Our floor coverings, wall solutions and finishing components are user friendly, healthy solutions. They are designed with respect for our planet to last as long as possible with proposed end-of-life options. From product design through end-of-life, the circular economy is a core priority for the group. We have determined 5 priority commitments to guide our environmental management up to 2025.

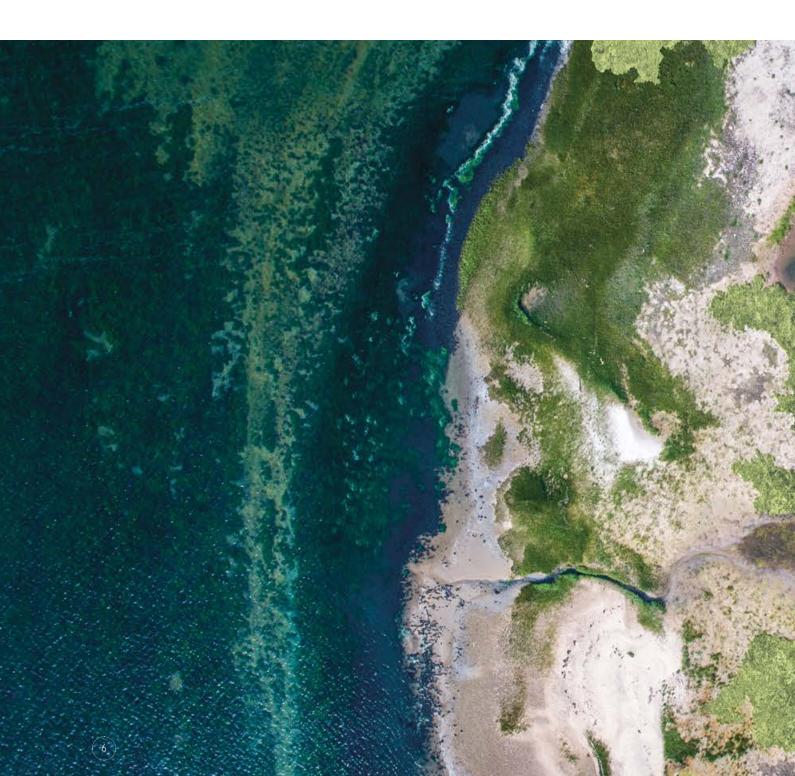

WE CARE I WE ACT.

Our commitments for a sustainable future



CARBON FOOTPRINT

-20% kg
CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED CONTENT**

5% in **2020 10%** by **2025**



25% in 2020 30% by 2025



25% in 2020 35% by 2025



ANNUAL VOLUME RECYCLED

50,000 t in 2020 60,000 t by 2025


- * Scopes 1 & 2 defined in the GHG protocol ** % of activity with biosourced materials
- *** % of activity with adhesive free solutions








Mipolam Homogeneous Evercare™	
 Mipolam Symbioz™ 	14
 Mipolam Planet & Bioplanet NEW 	18
Mipolam Elegance	24
 Mipolam Affinity 	26
Mipolam Accord	30
 Mipolam Cosmo 	32
Mipolam Troplan	33
Mipolam Homogeneous (PUR)	
Mipolam Classic	35

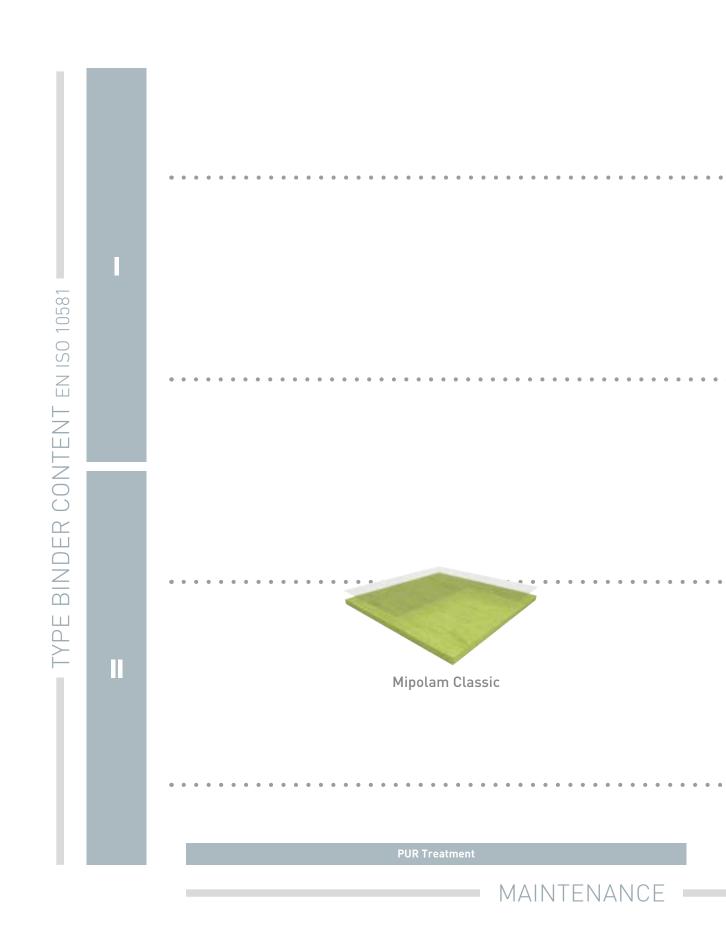





Mipolam Elegance Mipolam Affinity Mipolam Accord



Mipolam Planet Mipolam Bioplanet



Mipolam Symbioz™





Mipolam Cosmo



Mipolam Troplan



An exclusive and Gerflor patented surface treatment.



Stain shield



No wax for life Water and detergent savings



Matt effect: enhanced design




Anti-bacterial & anti-viral activity
ISO 22196 & ISO 21702

Evercare™ Treatment

MIPOLAM SYMBIOZ™

MIPOLAM SYMBIOZTM

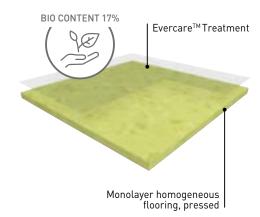


MIPOLAM SYMBIOZTM is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Their weight is 2595 gr/m². They feature a non-directional design incorporating coloured chips to ensure an even colour throughout the thickness presenting a nice matt finish.

MIPOLAM SYMBIOZ™ contain over 75% sustainable of renewable raw materials. They include a 100% bio based plasticizer, made of residues from cereals (wheat, corn...). It is 100% phthalates free and recyclable. This floorcovering is a non-emissive product (below the level of VOC measurement accuracy).

According to ISO 21702, Mipolam Symbioz has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00. According to ISO 22196, Mipolam Symbioz has **anti-bacterial activity** againt E. coli, S. aureus and MRSA of 99% after 24h00.

The flooring is equipped with **EvercareTM**, patented surface treatment obtained by **UV** laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

The flooring is **antistatic** (< 2 kV), its residual indentation is ≈ 0.02 mm. The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire** resistance. As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).

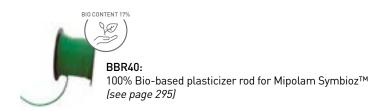

MIPOLAM SYMBIOZ™





Mipolam Symbioz™ have been engineered using a full life cycle model, to guarantee the lowest environmental impact at every stage of the product life

- ▶ Highest durability: product life expectancy > 20 years
- ► Eco-responsible exclusive Bio based plasticizer, 100% made from organic source
- ► Evercare™: patented polyurethane surface treatment with unique performance in staining providing chemical resistance
- ► Easy maintenance: no wax for life
- ▶ On average 30% savings on maintenance cost
- ▶ 15% less detergent and water use.

Indoor Air Quality: very low emitting material (40 times lower than European standards).

			MIPOLAM SYMBIOZ™	
DESCRIPTION				
Total thickness	EN ISO 24346 mm		2	
Weight	EN ISO 23997 g/sqm		2595	
Width of sheet	EN ISO 24341 cm		200	
Length of sheet	EN ISO 24341 lm		20	
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO 10581	
European classification	EN ISO 10874	class	34-43	
Fire rating	EN 13501-1	class	B _{fl} -s1	
Static electrical propensity	EN 1815	kV	< 2	
Slip resistance	DIN 51130	class	R9	
PERFORMANCES				
Type Binder content	EN ISO 10581	type	I.	
Dimensional stability	EN ISO 23999	%	≤ 0.40	
Impact Sound Insulation	EN ISO 717-2	dB	5	
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	
Residual indentation (average measured value)	-	mm	≃ 0.02	
Castor chair test (type H)	ISO 4918	-	ОК	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	> 6	
Surface treatment	-	-	Evercare™	
Chemical products resistance	EN ISO 26987	class	ОК	
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ^[1]	ISO 22196	-	> 99% inhibits growth	
Anti-viral activity (human coronavirus) after 2h ^[1]	ISO 21702	-	> 99.7% virucidal activity	
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	microgram/m³	<10	
Certification	-	-	Floorscore®	
CE MARKING				
(6	FN ²	14041		
	LIN		B _{II} -s1	

(1) The implementation of an effective cleaning regime is the most important defence against infection.

MIPOLAM SYMBIOZTM











∧ Scale 1






MIPOLAM PLANET & BIOPLANET New

•

MIPOLAM PLANET & BIOPLANET

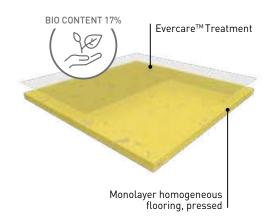

MIPOLAM PLANET is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Their weight is **2700 gr/m²**.

They feature a non-directional design incorporating translucent chips that provides a 3D effect and ensures an even colour throughout the thickness presenting a nice matt finish over 40 colours.

The flooring is equipped with **EvercareTM**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is REACH compliant. It is **100% phthalates free and recyclable**. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³ and g/m³) and this product is classified A + (the best class). According to ISO 21702, Mipolam Planet has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00. According to ISO 22196, Mipolam Planet has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h00.

The flooring is **antistatic** (< 2 kV), its residual indentation is \approx 0.02 mm. The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire resistance**. As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).

MIPOLAM BIOPLANET is fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, providing excellent resistance to wear and tear in high traffic areas. Its weight is **2700 gr/m²**.

It features a non-directional design incorporating translucent chips that provides a 3D effect and ensures an even colour throughout the thickness presenting a nice matt finish over 40 colours. It contains over 75% sustainable of renewable raw materials. It include a 100% bio based plasticizer, made of residues from non-agricultural food.

The flooring is equipped with **EvercareTM**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is REACH compliant. It is **100% phthalates free and recyclable**. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³ and g/m³) and this product is classified A + (the best class). According to ISO 21702, Mipolam Bioplanet has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h00. According to ISO 22196, Mipolam Bioplanet has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h00.

The flooring is **antistatic** (< 2 kV), its residual indentation is \approx 0.02 mm.

The flooring complies with the EN ISO 10581 norm, has a binder content Type I and is suitable for heavy duty traffic areas and **Bfl-s1 fire resistance**. As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSaS 18001 (safety).

MIPOLAM PLANET & BIOPLANET New








- ► Recycled content 25%, 100% Recyclable
- ▶ Bio content 17% (Mipolam BioPlanet on demand)
- ► Anti-viral activity & Anti-bacterial activity Indoor air quality: TVOC 100 times below standard
- ▶ 40 COLOURS: Bright and subtle non directional design
- ► Heavy traffic resistance
- ► Ease of maintenance thanks to Evercare™

			MIPOLAM PLANET	MIPOLAM BIOPLANET	MIPOLAM PLANET R10	
DESCRIPTION						
Total thickness	EN ISO 24346	mm	2	2	2	
Weight	EN ISO 23997	g/sqm	2700	2700	2700	
Width of sheet	EN ISO 24341	cm	200	200	200	
Tile size	EN ISO 24342	mm	608 x 608 ^[1]	608 x 608 ^[1]	608 x 608 ^[1]	
Length of sheet	EN ISO 24341	lm	20	20	20	
CLASSIFICATION						
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	
European classification	EN ISO 10874	class	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	
Slip resistance	DIN 51130	class	R9	R9	R10	
PERFORMANCES						
Type Binder content	EN ISO 10581	type	I	I	I	
Dimensional stability	EN ISO 23999	%	sheet < 0.40	sheet < 0.40	sheet < 0.40	
Dimensional stability (average measured value)	-	%	sheet ≈ 0.10	sheet ≈ 0.10	sheet ≈ 0.10	
Impact Sound Insulation	EN ISO 717-2	dB	5	5	5	
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	
Residual indentation (average measured value)	-	mm	≃ 0.02	≃ 0.02	≃ 0.02	
Castor chair test (type H)	ISO 4918	-	0K	OK	OK	
Decontamination	ISO 8690		Excellent	Excellent	Excellent	
Watertightness	EN 13553	Annex A	Pass	Pass	Pass	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 7	≥ 7	≥ 7	
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	
Chemical products resistance	EN ISO 26987	class	OK	OK	OK	
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ^[2]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	
Anti-viral activity (human coronavirus) after 2h ^[2]	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity	
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10	< 10	
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	
CE MARKING						
CE	EN 14	4041				


⁽¹⁾ Products available in tiles for a minimum quantity order of 500 sqm.

⁽²⁾ The implementation of an effective cleaning regime is the most important defence against infection.

MIPOLAM PLANET & BIOPLANET New

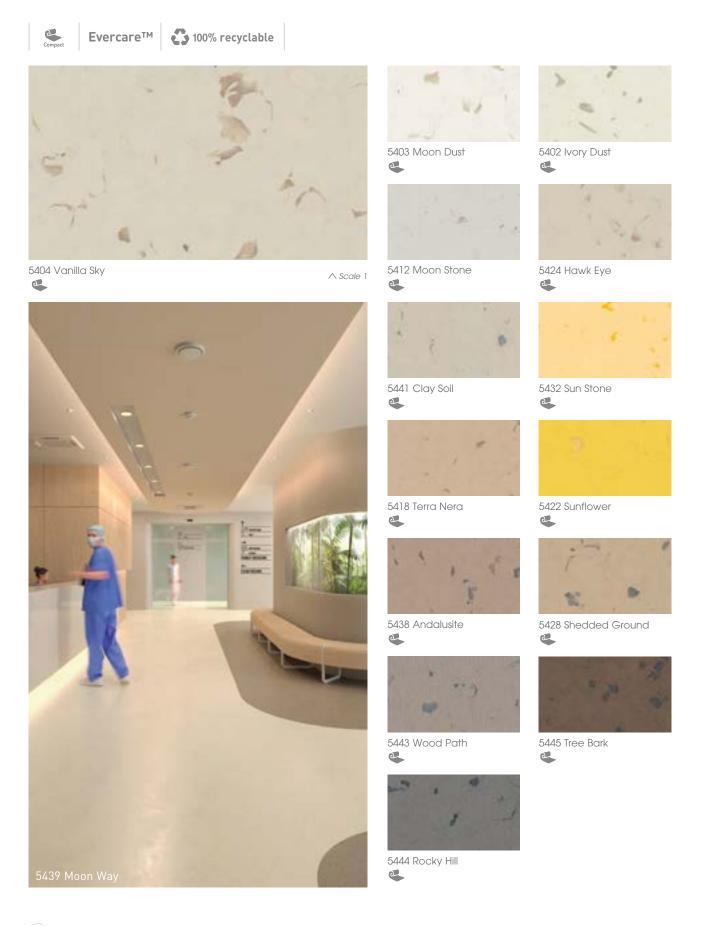




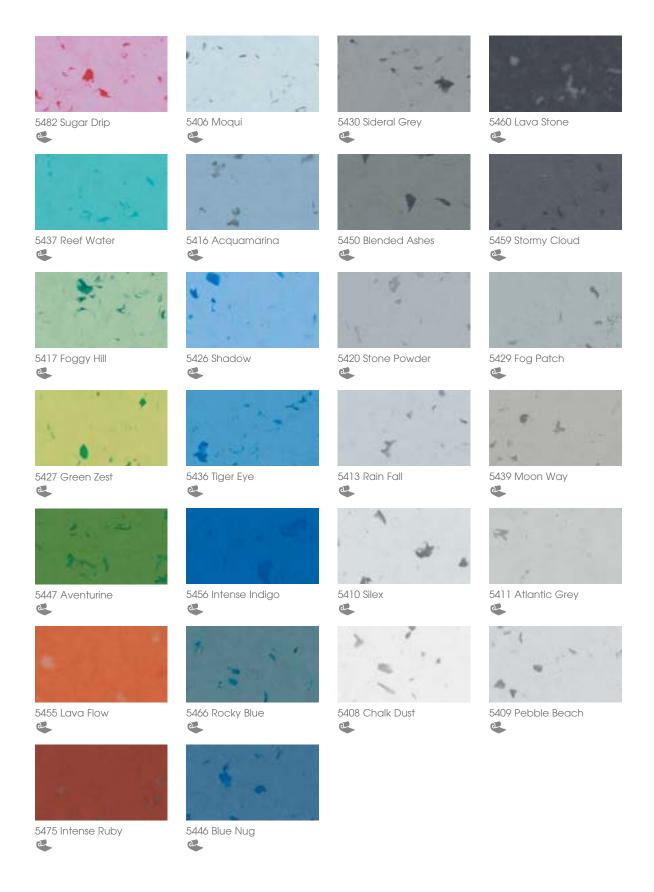

[◆] Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

MIPOLAM ELEGANCE / AFFINITY / ACCORD / COSMO / TROPLAN

MIPOLAM ELEGANCE




MIPOLAM ELEGANCE is a monolayer homogeneous flooring with a high PVC content pressed in 2 m sheets, with a thickness of 2 mm and a **weight of \leq 2850 g**. The non directional design with colour throughout the thickness integrates a 3D effect (transparent particles in pure PVC on all 33 references) and a **matt finish**.

This flooring is recommended for administrative buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by **UV laser cross-linking**. This Evercare™ treatment avoids staining of **chemical products used in Healthcare** like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes.

According to ISO 21702, MIPOLAM ELEGANCE has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, MIPOLAM ELEGANCE has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. The flooring is composed of minimum 25% recycled content 100% controlled and is REACH compliant. It is 100% recyclable and 100% phthalate free. This flooring is antistatic (< 2 kV), compliant to EN ISO 10581 with a binder content type I, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance. The product is non reactive to residual indentation with a value < 0.02 mm. The product emission rate of volatile organic compounds is <10 microgram/m³ (TVOC after 28 days ISO 16000-6).


MIPOLAM AFFINITY.....



MIPOLAM AFFINITY is a vinyl flooring homogeneous pressed in 2 m sheets, with a thickness of 2 mm and a weight of 2800 g. The non-directional design with colour throughout the thickness is available in 50 references presenting a contrasted designed & a matt finish. This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with Evercar™, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

According to ISO 21702, **MIPOLAM AFFINITY** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM AFFINITY** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is **REACH compliant**. It is 100% phthalate free and recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 microgram/m³) and this product is classified A + (the best class). This flooring is **antistatic** (< 2 kV), its residual indentation is < 0.02 mm to 150 minutes respecting EN ISO 24343-1. This flooring complies with EN ISO 10581 offering a Binder content Type I, which makes it suitable for heavy duty traffic areas. It has a **BfI-s1 fire** resistance

MIPOLAM ACCORD



MIPOLAM ACCORD is a monolayer homogeneous flooring with high PVC content calendered and pressed in 2 m sheets, with a thickness of 2 mm and a weight of ≤ 2790 g. The semi-directional design with colour throughout the thickness is available in 28 references presenting a nice matt finish.

This flooring is recommended for collective buildings making skirtings easier, as well as angles and welding. The flooring is equipped with **Evercare™** the latest improvements in polyurethane surface treatment obtained by **UV laser cross-linking**. This Evercare™ **avoids staining of chemical products used in Healthcare** like betadine, eosin or antibacterial hand gel and increases the durability of the flooring. This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes. According to ISO 21702, MIPOLAM ACCORD has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **MIPOLAM ACCORD** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h. The flooring is composed of minimum **25% recycled content 100% controlled** and is **REACH compliant**. It is 100% phthalate free and 100% recyclable. This flooring is **antistatic** (< 2 kV). The product is non-reactive to residual indentation with a value < 0.02 mm to 150 minutes respecting EN ISO 24343-1. The flooring is compliant with ENSO 10581 norm, has a binder content type I, is suitable for heavy duty traffic areas and has a **Bfl-s1 fire** resistance. The product emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).

MIPOLAM ELEGANCE / AFFINITY / ACCORD / COSMO / TROPLAN

•

MIPOLAM COSMO




 $\textbf{MIPOLAM COSMO} \ is a vinyl flooring homogeneous calendared and pressed in 2 m sheets,$ with a thickness of 2 mm and a weight ≤ 3000 g. The semi-directional design with colour throughout the thickness is available in 10 references presenting a nice matt finish. This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with **Evercare™** patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

According to ISO 21702, MIPOLAM COSMO has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, MIPOLAM COSMO has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. It is composed of 45% minerals, 22% of inexhaustible material and at least 25% of recycled 100% controlled. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative) and toxic) and is REACH compliant. It is 100% phthalate free and 100% recyclable. VOC emissions after 28 days (ISO 16000-6) are below detection levels with <10 microgram/m³ and this product is classified A + (the best class). The flooring is antistatic (< 2 kV), its residual indentation is < 0.02 mm. The flooring is compliant with EN ISO 10581 norm, has a binder content type I, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance.

•

MIPOLAM TROPLAN



MIPOLAM TROPLAN is a vinyl flooring homogeneous calendered and pressed in 2 m sheets, with a thickness of 2 mm and a weight ≤ 3300 g. The directional design with colour throughout the thickness is available in 18 references presenting a nice matt finish. This flooring is suitable for medium to high traffic areas, and facilitates floor-wall junctions, angles and welding treatments. The flooring is equipped with Evercare™, patented surface treatment obtained by **UV laser cross-linking** offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and long lasting the flooring. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. According to ISO 21702, MIPOLAM TROPLAN has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, MIPOLAM TROPLAN has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. It is composed of 45% minerals, 22% of inexhaustible material and at least 25% of recycled 100% controlled. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is REACH compliant. Mipolam Troplan is 100% phthalate free and 100% recyclable. VOC emissions after 28 days (ISO 16000-6) are below detection levels with < 10 microgram/m³ and this product is classified A + (the best class). The flooring is antistatic (< 2 kV), its residual indentation is < 0.03 mm. The flooring is compliant to the EN ISO 10581 norm, has a binder content type II, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance.



MIPOLAM ELEGANCE / AFFINITY / ACCORD / COSMO / TROPLAN







High performing homogeneous multipurpose floorings Suitable for heavy traffic areas (education, healthcare, shops)

- ▶ Mipolam Mipolam Elegance / Mipolam Affinity / Mipolam Accord / Mipolam Cosmo / Mipolam Troplan: Evercare™ - New revolutionary patented polyurethane surface treatment with unique performance in staining providing unrivalled chemical and scratching resistance
- ► Antistatic
- ▶ Densely compacted surface for improved wear and ease of maintenance.

			MIPOLAM ELEGANCE	MIPOLAM AFFINITY	MIPOLAM ACCORD	MIPOLAM COSMO	MIPOLAM TROPLAN	
DESCRIPTION								
Total thickness	EN ISO 24346	mm	2	2	2	2	2	
Weight	EN ISO 23997	g/sqm	2850	2800	2790	3000	3300	
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	
Length of sheet	EN ISO 24341	lm	20	20	20	20	20	
Tile size	EN ISO 24342	mm	608 x 608 ⁽¹⁾	608 x 608 ^[1]	608 x 608 ^[1]	608 x 608 ^[1]	608 x 608 ⁽¹⁾	
Number of tiles per package	-	-	20	20	20	20	20	
CLASSIFICATION								
Norm / Product specification	-	-	EN ISO 10581					
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	B _{fl} -s1					
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	
Slip resistance	DIN 51130	class	R9	R9	R9	R9	R9	
PERFORMANCES								
Type Binder content	EN ISO 10581	type	I	I	I	I	П	
Dimensional stability (requirement)	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25					
Dimensional stability (average measured value)	EN ISO 23999	%	-	-	-	-	-	
Impact Sound Insulation	EN ISO 717-2	dB	5	5	5	5	4	
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	
Residual indentation (average measured value)	-	mm	≃ 0.02	≃ 0.02	≃ 0.02	≃ 0.02	≃ 0.03	
Castor chair test (type H)	ISO 4918	-	OK	0K	OK	OK	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™	
Chemical products resistance	EN ISO 26987	class	0K	0K	0K	OK	0K	
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ^[2]	ISO 22196	-	> 99% inhibits growth					
Anti-viral activity (human coronavirus) after 2h ^[2]	ISO 21702	-	> 99.7% virucidal activity					
ENVIRONMENT / INDOOR AIR QUALITY								
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10	< 10	< 10	< 10	
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®	Floorscore®	
CE MARKING								
CE	EN 14	041				® _{fl} -s1		

⁽¹⁾ Products available in tiles for a minimum quantity order of 500 sqm.

⁽²⁾ The implementation of an effective cleaning regime is the most important defence against infection.


MIPOLAM ELEGANCE










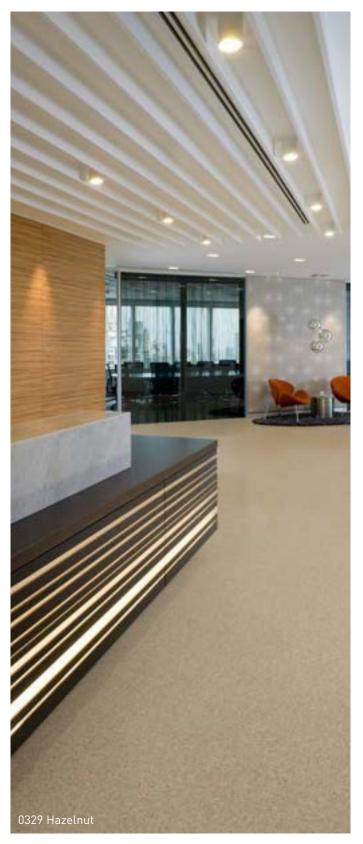

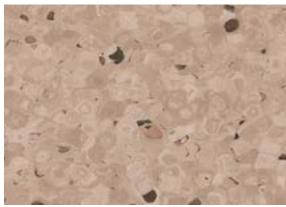


0329 Hazelnut



0705 Patisson







0343 Pecan



0697 Greenstone



0347 Mangoustan





0344 Nutmeg



0321 Olive





- ◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.
- 🔹 References also available as Elegance SD suitable for Shower system.

MIPOLAM AFFINITY







Evercare™






4476 Amethyst

∧ Scale 1



lacktriangle Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

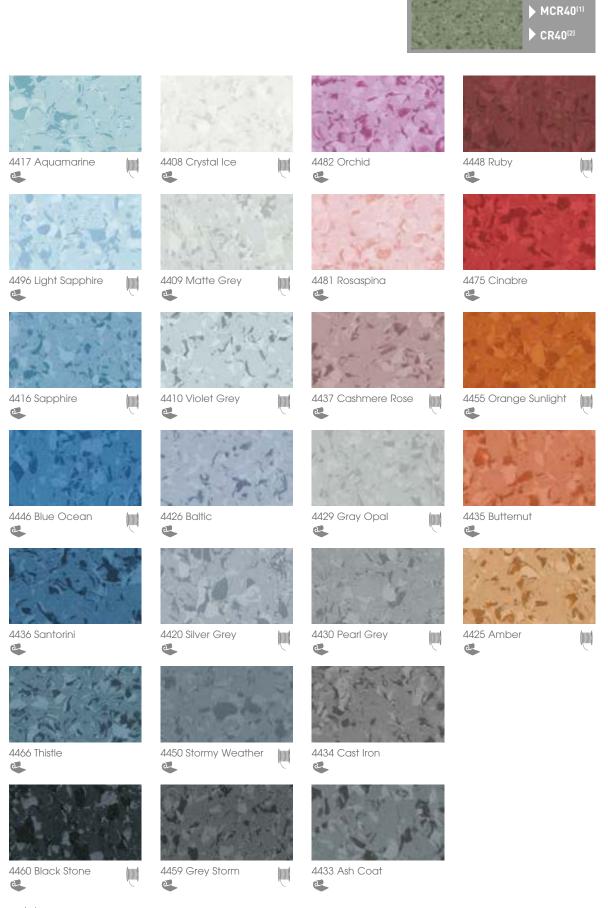

(1) Mentioned colors available with MCR40 specific multicolor welding rod (code: H058) (2) All colors available with CR40 matching uni welding rod (code: 05851)

MIPOLAM AFFINITY







Evercare™






4402 Yuki

A Scale



◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

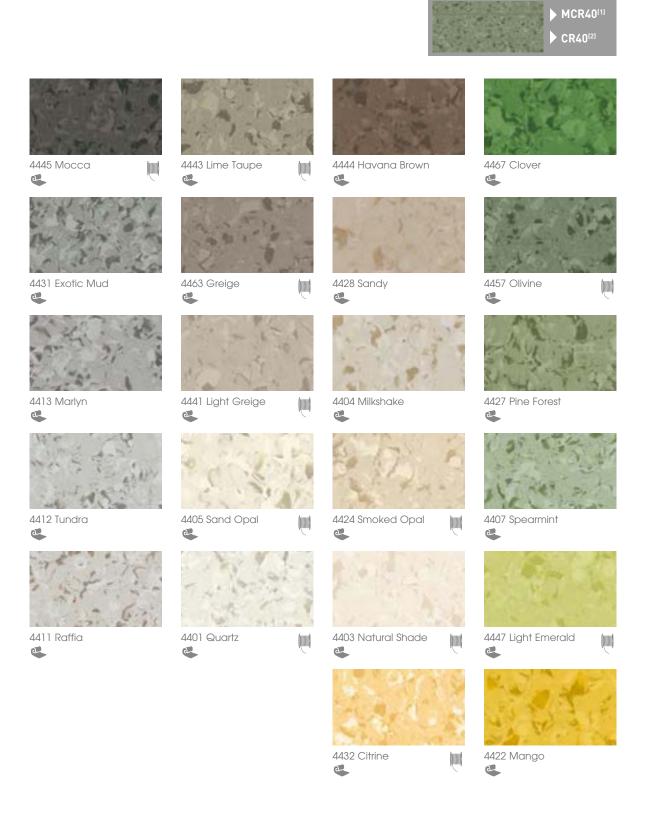

MIPOLAM ACCORD







Evercare™








∧ Scale



◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.



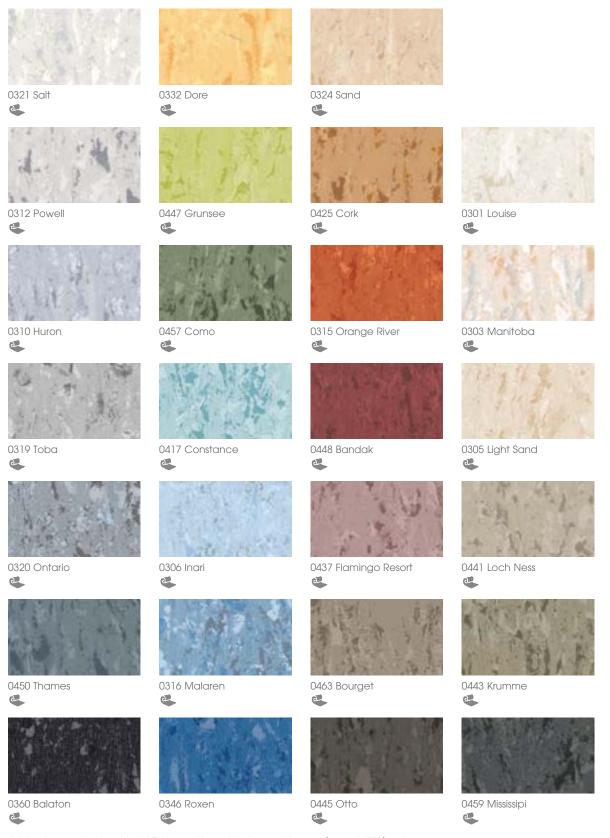

^{*} All colors available with MCR40 specific multicolor welding rod (code: H058) and with CR40 matching uni welding rod (code: 05851)

MIPOLAM COSMO












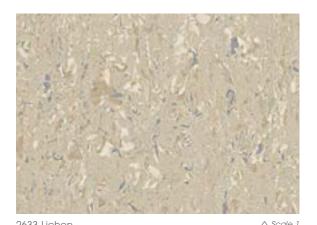







2603 Lemon Chiffon





2609 Light Smoke







2636 Overseas





2638 Pure Grey

2355 Real Red



2639 Smart Grey

◆ Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm.

MIPOLAM TROPLAN







Evercare™











1009 Light Grey



1032 Yellow



1055 Apricot



1002 Beige



1010 Grey



1006 Blue



1007 Green



1003 Light Ocre



1059 Blue Grey




1036 Medium Blue



1037 Medium Green




1035 Ocre



1040 Dark Grey



1056 Dark Blue



1057 Dark Green



1033 Brown



1060 Anthracite

MIPOLAM CLASSIC

MIPOLAM CLASSIC.....




MIPOLAM CLASSIC 1.5 mm is a flexible homogeneous calendered compacted floorcovering in tiles or sheets, with directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness of 1.5 mm and a **weight of \leq 2520~g**. Its surface is densely compacted for improved wear and ease of maintenance. It receives a polyurethane **(PUR)** surface treatment for ease of maintenance and to avoid the use of an immediate acrylic emulsion after installation. The flooring complies with the **EN ISO 10874** (34-43) and EN ISO 10581, has a binder content type II, has Bfl-s1 fire resistance. It is suitable for heavy traffic areas. It is 100% recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels ($< 10~\text{microgram/m}^3$) and this product is classified A + (the best class).

MIPOLAM CLASSIC 2 mm is a flexible homogeneous calendered compacted floorcovering in tiles or in 2 m sheets, with a thickness of 2 mm and a weight of ≤ 3300 g. This directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness is available in 18 references. Its surface is densely compacted for improved wear and ease of maintenance.

It receives a polyurethane [**PUR**) surface treatment for ease of maintenance and to avoid the use of an immediate acrylic emulsion after installation. The flooring complies with the **EN ISO 10874** (34-43) and EN ISO 10581, has a binder content type II, has Bfl-s1 fire resistance. It is suitable for heavy traffic areas. It is 100% recyclable. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class).

			MIPOLAM CLASSIC				
DESCRIPTION							
Total thickness	EN ISO 24346	mm	1.5	2			
Weight	EN ISO 23997	g/sqm	2520	3300			
Width of sheet	EN ISO 24341	cm	200	200			
Length of sheet	EN ISO 24341	lm	20	20			
Tile size	EN ISO 24342	mm	+	300 x 300 ^[1] / 608 x 608			
Number of tiles per package	-	-	-	50 / 20			
CLASSIFICATION							
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581			
European classification	EN ISO 10874	class	23-31	34-43			
Fire rating	EN 13501-1	class	B _{fl} -s1	Bfl-s1			
Static electrical propensity	EN 1815	kV	< 2	< 2			
PERFORMANCES							
Type Binder content	EN ISO 10581	type		II			
Dimensional stability	EN ISO 23999	%	≤ 0.40	Sheet ≤ 0.40 / Tile ≤ 0.25			
Impact Sound Insulation	EN ISO 717-2	dB	+	4			
Residual indentation (norm)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10			
Residual indentation (average measured value)	-	mm	≃ 0.03				
Castor chair test (type H)	ISO 4918	-	0K	OK			
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25			
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6			
Surface treatment	-	-	PUR	PUR			
Chemical products resistance	EN ISO 26987	class	OK	OK			
ENVIRONMENT / INDOOR A	IR QUALITY						
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10				
Certification	-	-	Floorscore®				
CE MARKING							
C€	EN 140	41		B _{ff} -s1			

(1) Tiles (300 x 300 mm) available for a minimum order quantity of 500 sqm.

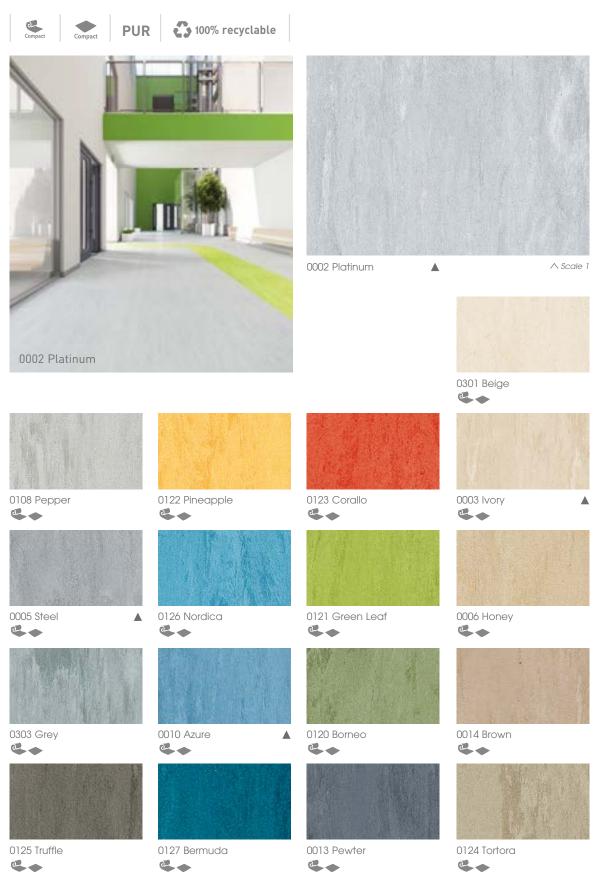


All colours available as 300 x 300mm tiles upon request for a minimum order quantity of 500 sqm \blacktriangle Thickness: 1.5 mm - Sheet format only





Dramairum	
Premium	
Poesy	4:
 Neopolis 	4.
 Osmoz 	4
• Indiana	4
 Metallica 	48
 Brazilia 	48
My Premium	49
Premium Dry-Tex™	50
Attraction® Premium (See page 190)	

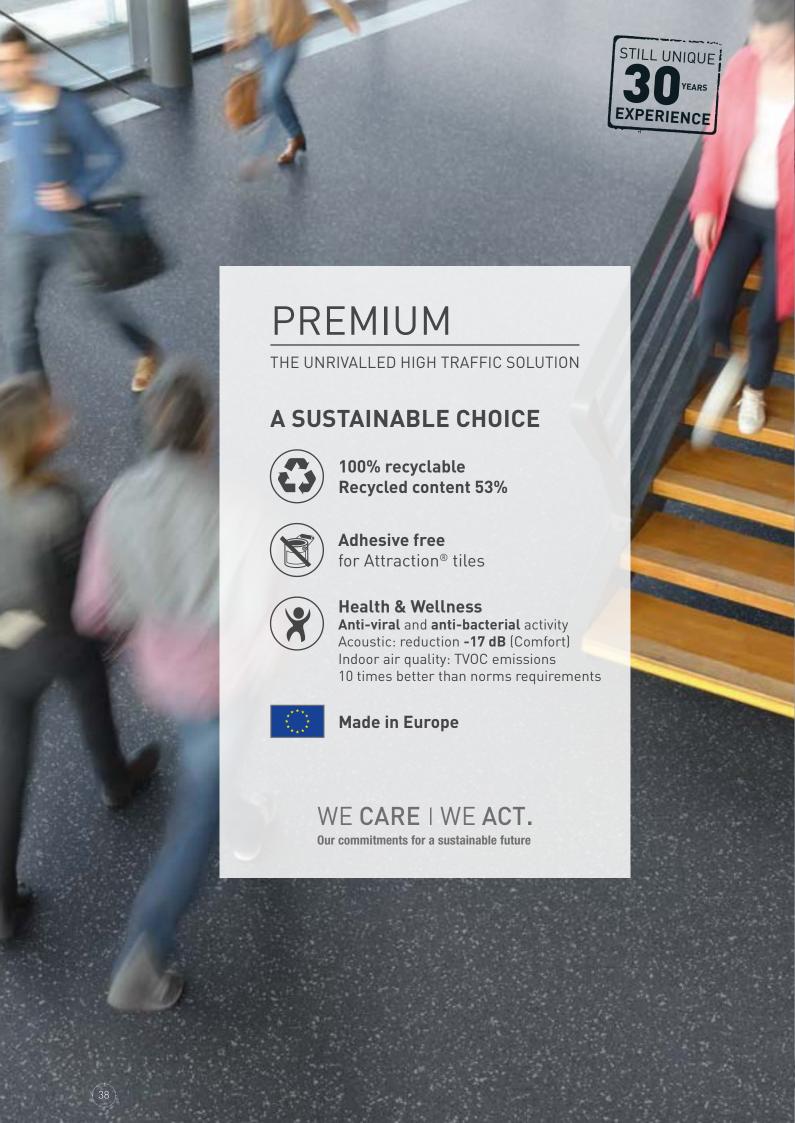

BEST TECHNOLOGIES IN ONE

EVERCARE™ TECHNOLOGY



Stain resistance



Matt surface

100% PURE HOMOGENEOUS WEARLAYER



Superior abrasion & traffic resistance



Long lasting colors

MULTILAYERED CONSTRUCTION



Exceptional dimensional stability



Acoustic properties


- 17 dB (Comfort sheet)
- 8 dB (Compact sheet)

Premium Premium

Customize your floor!



PREMIUM COMFORT

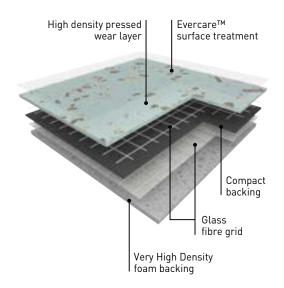

The floor covering is made of a > 1.02 mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

The product contains a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid.

It offers a 17 dB (Metallica: 16 dB) sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness.

PREMIUM COMFORT is treated with Evercare™, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, **PREMIUM COMFORT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **PREMIUM COMFORT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content; 100% of which are fully controlled and REACH compliant.


It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers.

The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is 100% recyclable.

PREMIUM COMPACT _____

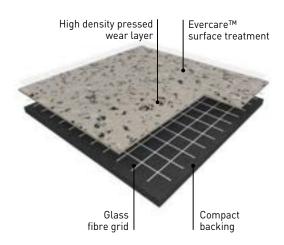

The floor covering is made of a ≥ 1.02 mm thick, pure vinyl homogeneous wear layer with no filler, incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.

It offers a T group wear rating and is available in 2 m wide sheet.

Its compact backing is calendered, pressed and reinforced with a glass fibre grid yielding.

It offers a 8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness.

PREMIUM COMPACT is treated with Evercare™, a surface treatment obtained by UV laser crosslinking. It ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

According to ISO 21702, **PREMIUM COMPACT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **PREMIUM COMPACT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is 100% compliant with REACH.

It is composed of 40% of minerals and inexhaustible materials.

It is made with more than 50% recycled content; 100% of which are fully controlled and REACH compliant.

It does not contain any heavy metals, any formaldehydes.

It is made with phthalate free plasticizers.

The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is 100% recyclable.









Evercare™



- ► Outstanding durability
 - Design within the whole thickness of the wear layer, ≥ 1.02 mm thick
- ► Long lasting appearance

Pure vinyl wear layer (no filler, no transparent wear layer) for the best scratch and soiling resistance

► Easy maintenance & matt effect

- ► Excellent indoor air quality TVOC after 28 days < 10 microgram/m³
- ▶ Rolling heavy loads easiness, best stability and very high performance indentation / acoustic 0.06 mm / 17 dB (Metallica: 16 dB) for Comfort, 0.02 mm / 8 db for Compact Glass fibre grid reinforcement & very high density foam backing

Evercare™ surface treatment			PREMIUM COMFORT Poesy - Neopolis - Osmoz - Indiana - Metallica - Brazilia	PREMIUM COMPACT Poesy - Neopolis - Osmoz - Indiana - Metallica - Brazilia	
DESCRIPTION					
Total thickness	EN ISO 24346	mm	3.00 - 3.30	2.00	
Thickness of wearlayer	EN ISO 24340	mm	≥ 1.02	≥ 1.02	
Weight	EN ISO 23997	g/sqm	≥ 2800	≥ 2580	
Width of sheet	EN ISO 24341	cm	200	200	
Length of sheet	EN ISO 24341	lm	25	20	
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 11638	EN ISO 10582	
European classification	EN ISO 10874	class	34-42	34-43	
Fire rating	EN 13501-1	class	Cfl-s1	Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2	< 2	
Slip resistance	DIN 51 130	class	R10	R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	
Wear group	-	group	T	Т	
Type Binder content	EN ISO 10582	type	-	l l	
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20	≤ 0.10	
Residual indentation (average measured value)	-	mm	≈ 0.06	≈ 0.02	
Impact sound insulation	EN ISO 717-2	dB	17 16 (Metallica)	8	
Castor chair test (type H)	ISO 4918	-	OK	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	
Surface treatment	-	-	Evercare™	Evercare™	
Chemical products resistance [1]	EN ISO 26987	-	OK	OK	
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	
Anti-viral activity (human coronavirus) after $2h^{[2]}$	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10	
Certification	-	-	Floorscore®	Floorscore®	
CE MARKING	EN 14041				





⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website. (2) The implementation of an effective cleaning regime is the most important defence against infection.

POESY














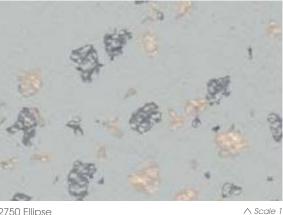

2750 Ellipse

7109 Idylle





2752 Litote








8626 Rime

8627 Allegorie





2747 Ballade





8621 Ode

2748 Refrain 84



2749 Lyrique

NEOPOLIS
















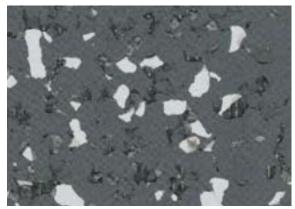


2741 Brooklyn






2743 Central Park



2745 Plaza



2744 Queens Soft



2740 Harlem Soft



2742 Times Square



PREMIUM

OSMOZ









Compact Comfort 17 dB EvercareTM For 100% recyclable







Product available as Attraction® tiles - For more detail see page 190.

PREMIUM

INDIANA













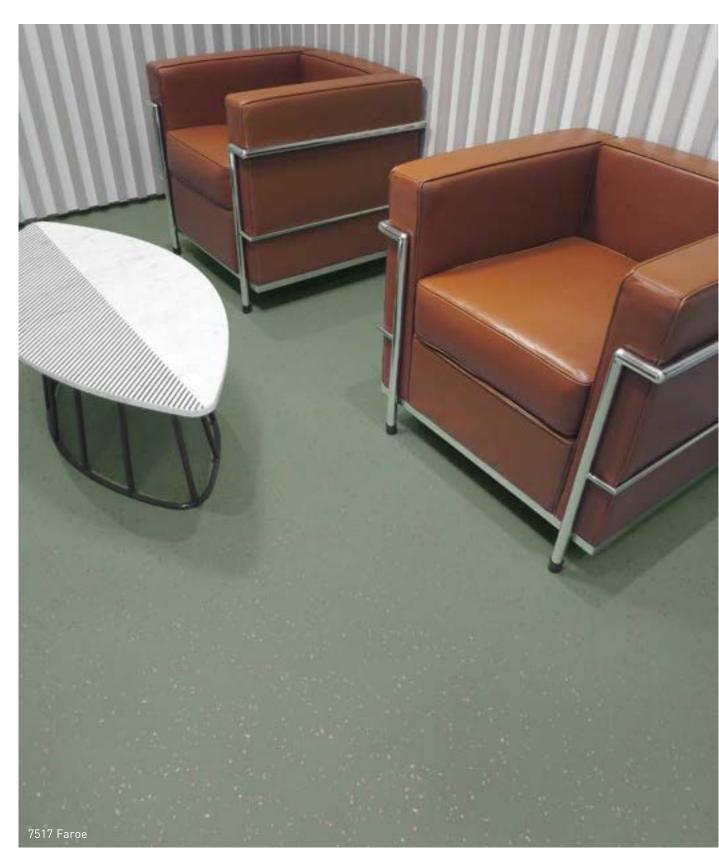

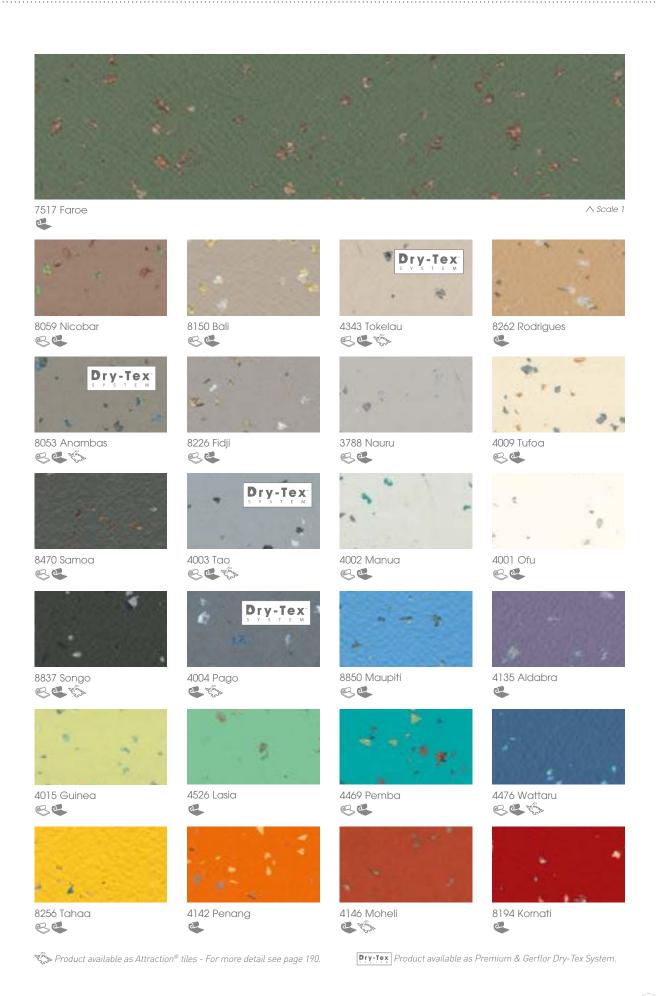

METALLICA / BRAZILIA

















METALLICA




8257 Nyx



9719 Eclipse



8623 Sedna




9745 Cosmic



9753 Energy

8625 Naïade



8624 Triton



9310 Tethys



9330 Moon



2746 Ymir

BRAZILIA



4342 Juara



3709 Ceara




8736 Recife




3734 Almerim



8386 Boa Vista



4329 Bacabal



3707 Paraiba



4478 Copacabana



4477 Maceio



8577 Amazonas



8269 Ipanema



8157 Goias





4136 Sao Luis

CUSTOMIZE YOUR FLOOR!

My Premium

1 SELECT A DESIGN TYPE











Brazilia

Indiana


Osmoz

Poesy

Neopolis



2 CHOOSE YOUR GRANULES: PALETTE

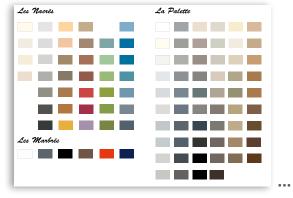

IN VISUALIZE YOUR DESIGN AND ORDER ONLINE ON






My Floor by Gerflor.com

PREMIUM DRY-TEX™ SYSTEM

THE SOLUTION
FOR HIGH
MOISTURE
SUBFLOORS

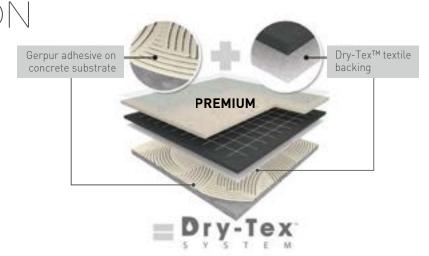


EMERGENCY DEPARTMENTS

- Reception areas
- Waiting rooms
- Corridors

HIGH MOISTURE SUBFLOORS

Proven resistance up to 98% RH / 15 lbs moisture according to ASTM F2170 & ASTM F1869

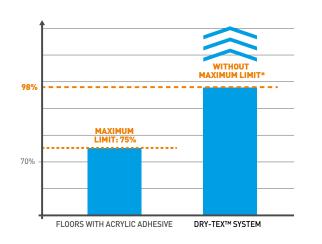

4 REFERENCES AVAILABLE FROM STOCK








8053 Anambas



4004 Pago



4003 Tao

All Premium Compact designs are available as Premium Dry-Tex™ for a minimum order quantity of 2400 sqm

PREMIUM DRY-TEX™ SYSTEM



8 dB

Evercare™





PREMIUM DRY-TEX™



PREMIUM DRY-TEX™ SYSTEM includes PREMIUM DRY-TEX™ and GERPUR glue. This system provides a complete moisture mitigation in full-spread adhesive installation eliminating interposition barrier for any slab with high moisture (up to 98% RH).

PREMIUM DRY-TEX™ is a multi-layered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2 m wide sheet. The product comprises a 1.02 mm thick homogeneous, pure vinyl wear layer incorporating very densely pressed coloured chips, with a mat finishing and without transparent wearlayer.

The product comprises a 100% post-manufacturing compact reinforced with a glass fiber grid and a non-woven backing. The product offers 8 dB sound insulation, an indentation resistance of 0.06 mm and a rolling heavy loads easiness.

PREMIUM DRY-TEX™ is treated with Evercare™, a surface treatment obtained by UV laser crosslinking. This Evercare™ ensures easy

maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and antibacterial hand gel.

According to ISO 21702, **PREMIUM DRY-TEX™** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h.

According to ISO 22196, **PREMIUM DRY-TEX™** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is composed of 40% of minerals and inexhaustible materials. It is made of 100% controlled recycled materials. It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH. It is made with a phthalate free plasticizer. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is 100% recyclable.

			PREMIUM DRY-TEX™
DESCRIPTION			
Total thickness	EN ISO 24346	mm	2.50
Thickness of wearlayer	EN ISO 24340	mm	1.02
Weight	EN ISO 23997	g/sqm	2660
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	T
Type Binder content	EN ISO 10582	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10
Residual indentation (value)	-	mm	≃ 0.03
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Impact sound insulation	EN ISO 717-2	dB	8
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance [1]	EN ISO 26987	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ^[2]	ISO 22196	-	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ^[2]	ISO 21702	-	> 99.7% virucidal activity
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 140	41	B _n -si
410 11 11 11 11 11 11 11			





Taralay Libertex	56
 Reflect Amsterdam Paros Legend Cocoon Hossegor Skandi Oak Pure Oak 	60 61 61 62 62 62 62 63
Taralay Impression	64
 Corner Kubes Rice Stars Nest Uni Matt Leather Cemento Mohair Trame Gentlemen Wood 	66 67 68 69 70 70 71 71 72 72 73-77
Taralay Initial NEW	78
DiversionMiamiSpiderUrbanStradaWood	80 81 82 83 83 84-87
Timberline	88
WoodPixel	90-94 95
Tarastep	96






PUR+

Protecsol® Treatment

MAINTENANCE





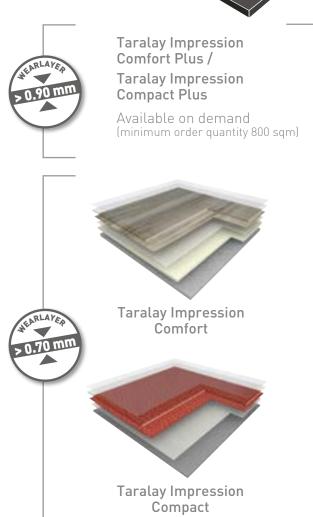


TARALAY LIBERTEX

ALL TARALAY BENEFITS ...



... WITH FAST TRACK INSTALLATION

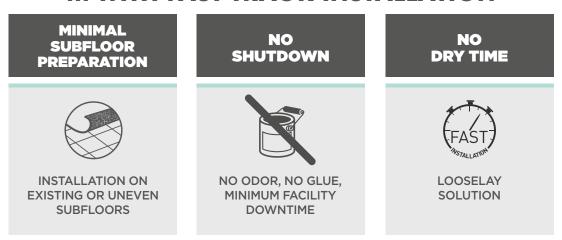



TARALAY LIBERTEX



FAST INSTALLATION IN ONE SOLUTION!



ADHESIVE FREE

Apply double-sided tape (such as Fix&Free 100 - Ref. 058U) on welding area and on room edges



HOT WELDING

for 100% watertight hygienic system (Ref. CR40 0585)



COLD WELDING

for invisible joint (see Romus #95605)



WALL TRANSITION

- Vynaflex skirtings, ideal for commercial applications (H 60 mm - Ref. 0483 / H 80 mm - Ref. 0482 / H 100 mm - Ref. 0477)
- Coving for 100% watertight hygienic system



ENTRANCE MATS

A new quick & easy installation of entrance mats with Quickmat Tile (Ref. 1725)

More information on gerflor.com



CIRCULAR ECONOMY


- 100% RECYCLABLE PRODUCT
- RECYCLED CONTENT: backing made with recycled PET



= 1m²

INDOOR AIR QUALITY

ADHESIVE FREE INSTALLATION MEANS VIRTUALLY NO VOC!

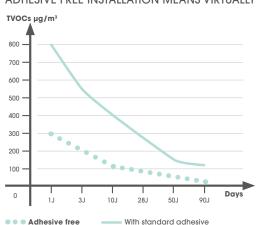




TARALAY MULTILAYERED - FAST TRACK INSTALLATION

TARALAY LIBERTEX

TARALAY LIBERTEX

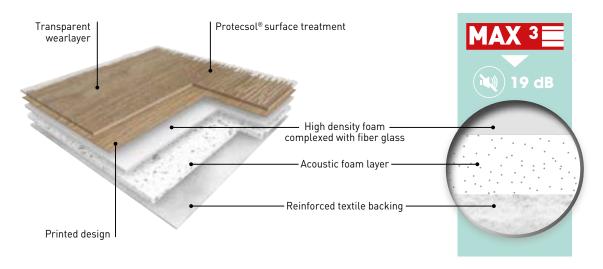

TARALAY LIBERTEX is ideal for fast track installation or renovations in commercial buildings. It is a multi-layered vinyl floorcovering with a printed design protected by a 0.70 mm thick transparent wear layer. The product features a high density foam complexed with fiber glass, an acoustic foam layer and a reinforced textile backing. It offers **19 dB sound insulation**.

It is available in 2 m and 4 m wide sheet, offers a R10 slip resistance and a group T wear rating. It is mechanically embossed, benefits from **Protecsol®** surface treatment and has an ultra matt look.

TARALAY LIBERTEX is a worry-free looselay solution. It is laid without glue, simply applying a double-sided tape such as Fix&Free on room edge and at the joint. Its textile backing absorbs surface irregularities requiring minimal subfloor preparation on uneven floors. It is compatible with cold welding, hot welding, coving, and Vynaflex skirtings.

It includes at least 30% mineral materials and 20% renewable materials. Textile backing is made at 95% from recycled PET bottles. It is 100% recyclable and 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000) are below 100 microgram/m 3 . It is classified A + (the best class) for indoor air quality.



TARALAY LIBERTEX





Fast track installation

- ▶ Minimal subfloor preparation: textile backing absorbs subfloor irregularities
- ▶ No shutdown, no odor, ideal for occupied rooms thanks to looselay installation
- ▶ No drying time, no glue

Hygienic and easy maintenance: Protecsol® surface treatment

Comfort: 19 dB sound reduction

			LIBERTEX
DESCRIPTION			
Total thickness	EN ISO 24346	mm	3.65
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2900
Width of sheet	EN ISO 24341	cm	200/400
Length of sheet	EN ISO 24341	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	Т
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Room impact	NF S 31 074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol®
Chemical products resistance ^[1]	EN ISO 26987	-	0K
ENVIRONMENT / INDOOR AIR QUALITY	Y		
TVOC after 28 days	ISO 16000-6	microgram/m³	< 100
CE MARKING			
CE	EN 14041		
			B _{rl} -s1

⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

⁽²⁾ The implementation of an effective cleaning regime is the most important defence against infection.

TARALAY MULTILAYERED - FAST TRACK INSTALLATION

TARALAY LIBERTEX - REFLECT











2253 Reflect Silver





2249 Reflect Sea



2252 Reflect Forest



2251 Reflect Sunny



1785 Reflect Earth




2252 Reflect Flower

TARALAY LIBERTEX - AMSTERDAM / PAROS







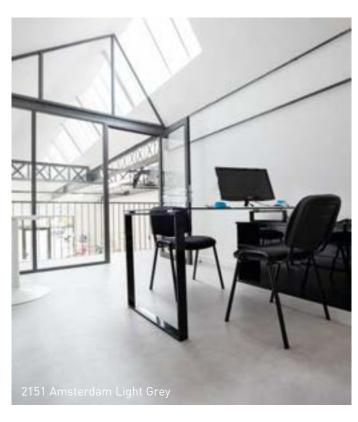

AMSTERDAM



2151 Amsterdam Light Grey



2152 Amsterdam Grey



2153 Amsterdam Anthracite



PAROS



2248 Paros Clear

TARALAY MULTILAYERED - FAST TRACK INSTALLATION

TARALAY LIBERTEX - WOOD









LEGEND







2243 - Legend Chestnut





2242 - Legend Country



COCOON





HOSSEGOR



2247 - Hossegor Latte



TARALAY LIBERTEX - WOOD









SKANDI OAK



2244 - Skandi Oak Clear



2245 - Skandi Oak Natural



2246 - Skandi Oak Toffee

PURE OAK



0720 - Pure Oak Clear




1751 - Pure Oak Grey

TARALAY MULTILAYERED

TARALAY IMPRESSION

N

TARALAY IMPRESSION COMPACT / COMPACT PLUS

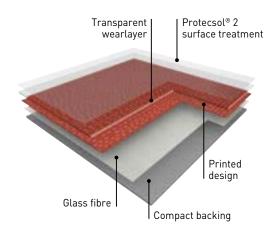

TARALAY IMPRESSION COMPACT 0,7 is a multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating. The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm.

TARALAY IMPRESSION COMPACT PLUS 0,9 is a multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating. The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer [0.90 mm thick]. It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm. The flooring is equipped with Protecsol® 2, patented surface transparent by the best showing projectance to


The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as Betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

According to ISO 21702, **TARALAY IMPRESSION** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **TARALAY IMPRESSION** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality.

•

TARALAY IMPRESSION COMFORT / COMFORT PLUS

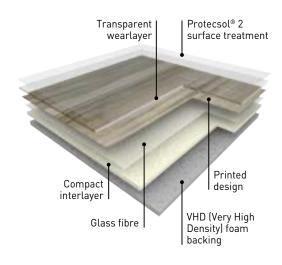

TARALAY IMPRESSION COMFORT 0,65 is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). **It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm**.

TARALAY IMPRESSION COMFORT PLUS 0,9 is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.90 mm thick). **It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm**.

The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

According to ISO 21702, **TARALAY IMPRESSION** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, **TARALAY IMPRESSION** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio-accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (< 10 microgram/m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality.

TARALAY IMPRESSION









► Ultra-realistic designs:

Realistic embosses and plank dimensions for wood designs

► Matt effect

► Extreme stain resistance, easy maintenance:

Protecsol® 2 surface treatment (patented technology by Gerflor)

▶ High traffic resistance, long-lasting appearance

Available with a 0.7 mm wearlayer and available with a 0.9 mm wearlayer upon request (minimum order quantity of 800 sqm)

▶ The best acoustic / indentation performance on the market

COMPACT: 0.03 mm / 8 dB COMFORT: 0.08 mm / 19 dB

► Eco-responsible solution

Best in class for indoor air quality (TVOC < 10 microgram/m³ after 28 days)

			TARALAY IMPRESSION COMPACT	TARALAY IMPRESSION COMPACT PLUS	TARALAY IMPRESSION COMFORT	TARALAY IMPRESSION COMFORT PLUS
DESCRIPTION						
Total thickness	EN ISO 24346	mm	2.00	2.25	3.35	3.55
Wearlayer Thickness	EN ISO 24340	mm	0.70	0.90	0.65	0.90
Weight	EN ISO 23997	g/sqm	2635	2975	2825	3265
Width of sheet	EN ISO 24341	cm	200	200	200	200
Length of sheet	EN ISO 24341	lm	25	20	25	20
CLASSIFICATION						
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 11638	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34 - 43	34-42	34 - 42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance	DIN 51 130	class	R10	R10	R10	R10
PERFORMANCES						
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	-	group	T	Т	T	T
Type Binder content	EN ISO 10582	type	1	1	-	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation (average measured value)	-	mm	<u>~</u> 0.03	<u>~</u> 0.03	<u>~</u> 0.08	≃ 0.08
Impact sound insulation	EN ISO 717-2	dB	8	8	19	19
Castor chair test (type H)	ISO 4918	-	0K	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2	PROTECSOL® 2
Chemical products resistance ^[1]	EN ISO 26987	-	OK	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24h ^[2]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ^[2]	ISO 21702	-	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity	> 99.7% virucidal activity
ENVIRONMENT / INDOOR QUA	LITY AIR					
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE MARKING						
CE	EN 14041					
<i>C C</i>	EN 14U41		B _{ff} -s1	C _{ff} =s1	B _{fl} -s1	C _{ff} -s1

TARALAY MULTILAYERED

TARALAY IMPRESSION - CORNER
















0733 Corner Copper 84

∧ Scale 1



0732 Corner Dark Blue




0728 Corner Offwhite



0740 Corner Turquoise



0729 Corner Metal



0739 Corner Anis 84



0730 Corner Light Beige 84



0741 Corner Tomette

34

TARALAY IMPRESSION - KUBES















0748 Kubes Burgundy 34

∧ Scale 1



0750 Kubes Sun 84



0749 Kubes Sky 84



0747 Kubes Olive 84



0754 Kubes Blue 84



0751 Kubes Taupe 84



0753 Kubes Grey 84



0756 Kubes Beige 8



0755 Kubes White 84



0752 Kubes Gold 84

TARALAY MULTILAYERED

TARALAY IMPRESSION - RICE















0736 Rice Champagne 84

∧ Scale 1



0763 Rice Greige 84



0737 Rice Souris 84



0762 Rice Brown 8



0758 Rice Sea 8



0738 Rice Copper



0735 Rice Light Green



0757 Rice Coquelicot 84



0759 Rice Mustard 84

TARALAY IMPRESSION - STARS / NEST











STARS



0743 Stars Baltique

∧ Scale 1





0764 Stars Orange 84



0744 Stars Anthracite 84








Protecsol® 2 100% recyclable





NEST

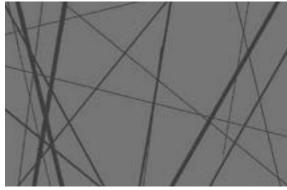

0746 Nest Black 84

∧ Scale 1



0745 Nest Metal



0765 Nest Taupe

TARALAY MULTILAYERED

TARALAY IMPRESSION - UNI MATT / LEATHER















0837 Uni Matt Blue 84

∧ Scale 1



0833 Uni Matt Beige 84



0848 Uni Matt White 84



0836 Uni Matt Tomette 84



0839 Uni Matt Turquoise 84



0834 Uni Matt Brown 84



0832 Uni Matt Grey 84



0835 Uni Matt Orange 34



0842 Uni Matt Olive 84



0831 Uni Matt Anthracite 84



0838 Uni Matt Dark Blue 84



0849 Uni Matt Sun 84



0840 Uni Matt Anis 84





0844 Leather Marine 84

∧ Scale 1



0843 Leather Grey 84



0845 Leather Greige 84

TARALAY IMPRESSION - CEMENTO / MOHAIR












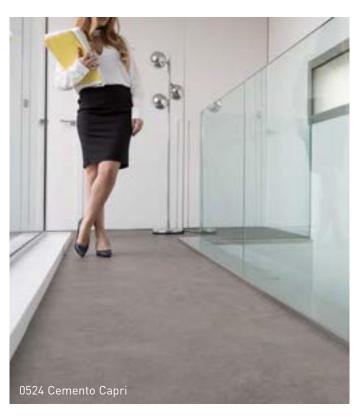

CEMENTO



0524 Cemento Capri 84

∧ Scale 1



0523 Cemento Genova 84



0543 Cemento Brescia 84



0525 Cemento Modena



MOHAIR



0766 Mohair Dark

∧ Scale 1



0769 Mohair White 84



0767 Mohair Natural **3**

TARALAY MULTILAYERED

TARALAY IMPRESSION - TRAME / GENTLEMEN







Compact Comfort 19 dB









0777 Trame Rose 84



0774 Trame Clear






0776 Trame Beige





GENTLEMEN

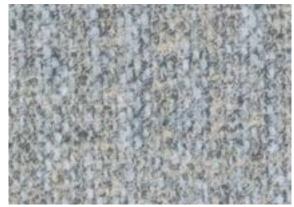

0771 Gentlemen Grey 84



0772 Gentlemen Coffee 84



0770 Gentlemen Clear 84

TARALAY IMPRESSION - WOOD
















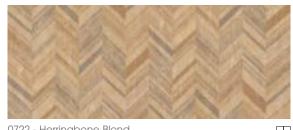





0724 - Herringbone Chatain



HABANA



0538 - Habana Vinales





0522 - Habana Trinidad



PORTOBELLO



0773 - Portobello



TARALAY IMPRESSION - WOOD












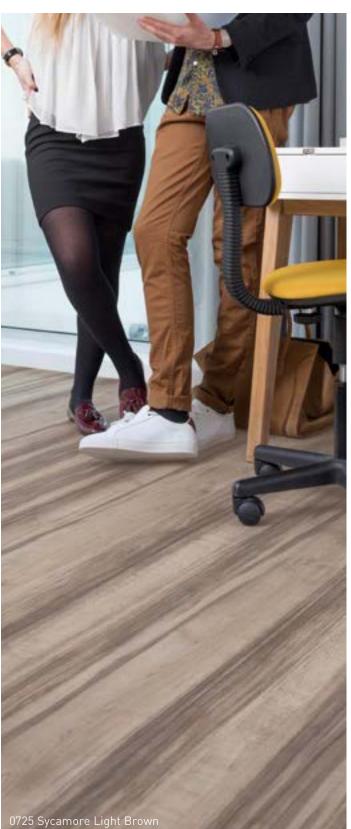

SYCAMORE



0727 - Sycamore Vanilla





0726 - Sycamore Dark





0725 - Sycamore Light Brown 84



INFINITY



0720 - Infinity Aube 84





0680 - Infinity Greige





0719 - Infinity Lichen 84



TARALAY IMPRESSION - WOOD













NOMA



0371 - Noma Rustic





0373 - Noma Ice





0519 - Noma Beige





RENZO



0068 - Renzo Pecan





0025 - Renzo Taupe



TARALAY IMPRESSION - WOOD

















CHARME










0721 - Charme Natural



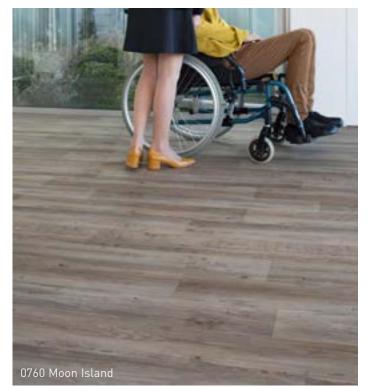

MOON ISLAND



0760 - Moon Island 84



TARALAY IMPRESSION - WOOD












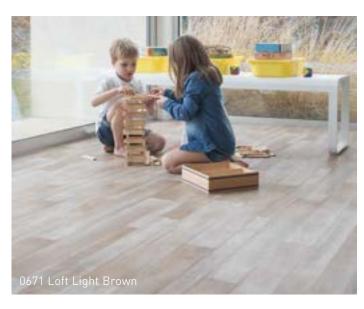






0671 - Loft Light Brown





0734 - Loft Chestnut



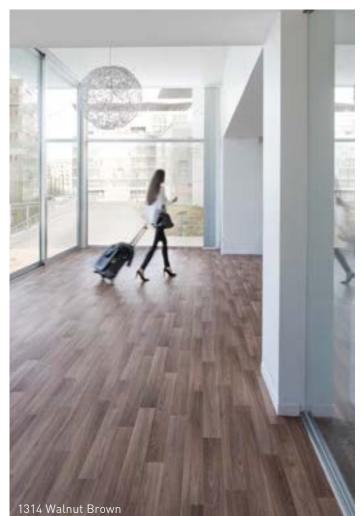

WALNUT



0528 - Walnut Cream







1314 - Walnut Brown




10 cm	

TARA	LAY IMPRESSION	PLANKS SIZES IN CM			
Colour Reference	Colour Name	Pattern Repeat in mm	Length	Width	
D519	Noma Beige	1000 X 1000	100	16.6	
373	Noma Ice	1000 X 1000	100	16.6	
371	Noma Rustic	1000 X 1000	100	16.6	
1538	Habana Vinales	1000 X 1000	100	16.6	
)552	Habana Trinidad	1000 X 1000	100	16.6	
)528	Walnut Cream	1000 X 1000	100	10	
314	Walnut Brown	1000 X 1000	100	10	
1671	Loft Light Brown	1000 X 1000	100	11.2-14.2-8.7-6.4	
1734	Loft Chestnut	1000 X 1000	100	11.2-14.2-8.7-6.4	
721	Charme Natural	1000 X 1000	100	20	
723	Charme Pecan	1000 X 1000	100	20	
0760	Moonisland	1000 X 1000	100	16.6	
0773	Portobello	1000 X 1000	100	16.6	
0722	Herringbone Blond	1000 X 1000	100	16.6	
0724	Herringbone Chatain	1000 X 1000	100	16.6	

TARALAY INITIAL New

TARALAY INITIAL COMPACT

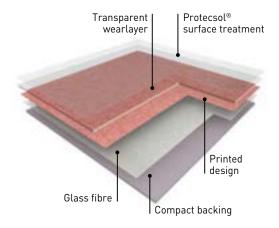

TARALAY INITIAL COMPACT is a multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 6 dB sound insulation and an indentation resistance of 0.03 mm.


It is treated with Protecsol®, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, TARALAY INITIAL COMPACT has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196, TARALAY INITIAL COMPACT has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h.

These products do not contain any heavy metals or CMR 1&2 and are 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days - ISO 16000-6). It is 100% recyclable.

TARALAY INITIAL COMFORT

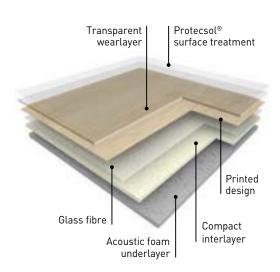

TARALAY INITIAL COMFORT is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). It offers 19 dB sound insulation and an indentation resistance of

It is treated with **Protecsol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, TARALAY INITIAL COMFORT has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196. TARALAY INITIAL COMFORT has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h.

It does not contain any heavy metals or CMR 1&2 and is 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

TARALAY INITIAL New








- ► All references are available in **Compact** and **Comfort**
- ► High resistance to indentation 0.03 mm (Compact) and 0.10 mm (Comfort)
- ► High impact insulation 6 dB (Compact) and 19 dB (Comfort)
- ► Protecsol® Surface Treatment (easy maintenance & no wax)
- ► Highest performance in TVOC emission < 10 microgram/m³

			TARALAY INITIAL COMPACT PRO	TARALAY INITIAL COMFORT PRO				
DESCRIPTION								
Total thickness	EN ISO 24346	mm	2.00	3.35				
Thickness of wearlayer	EN ISO 24340	mm	0.70	0.65				
Weight	EN ISO 23997	g/sqm	2635	2825				
Width of sheet	EN ISO 24341	cm	200	200				
Length of sheet	EN ISO 24341	lm	25	25				
CLASSIFICATION								
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638				
European classification	EN ISO 10874	class	34-43	34-42				
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1				
Static electrical propensity	EN 1815	kV	< 2	< 2				
Slip resistance wet	DIN 51 130	class	R10	R10				
PERFORMANCES								
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0				
Wear group	-	group	T	Т				
Type Binder content	EN ISO 10582	type	I	-				
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40				
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20				
Residual indentation (average measured value)	-	mm	<i>≃</i> 0.03	≃ 0.10				
Impact sound insulation	EN ISO 717-2	dB	6	19				
Castor chair test (type H)	ISO 4918	-	OK	OK				
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25				
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6				
Surface treatment	-	-	Protecsol®	Protecsol®				
Chemical products resistance	EN ISO 26987	-	OK	OK				
Anti-bacterial activity (E. coli - S. aureus - MRSA) ^[1]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth				
Anti-viral activity (human coronavirus) after 2h ^[1]	ISO 21702	-	> 99.3% virucidal activity	> 99.3% virucidal activity				
ENVIRONMENT / INDOOR AIR QUA	LITY							
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10				
Certification	-	-	Floorscore®	Floorscore®				
CE MARKING								
C€	EN 140	141 –						
			B _f	B _{ff} -s1				



TARALAY INITIAL - DIVERSION New











0515 Diversion Kiwi 84



0949 Diversion Soleil 84



0049 Diversion Carbone 84



0047 Diversion Ivoire 84



0825 Diversion Turquoise

8



0962 Diversion Marine 84



0824 Diversion Souris 84

TARALAY INITIAL - MIAMI New















0952 Miami Soleil 34





0950 Miami Sable 84



0966 Miami Abricot 84



0968 Miami Ciel 84



0951 Miami Litchee



0967 Miami Mer





0970 Miami Taupe 0965 Miami Foret 840





0964 Miami Souris 840

840

0969 Miami Paon 3

TARALAY INITIAL - SPIDER New













0974 Spider Saphir 84



0976 Spider Quartz 84



0956 Spider Grenat 84



0975 Spider Emeraude




0954 Spider Dore 84



0957 Spider Cuivre



0955 Spider Perle



0973 Spider Alu

TARALAY INITIAL - URBAN / STRADA New














URBAN

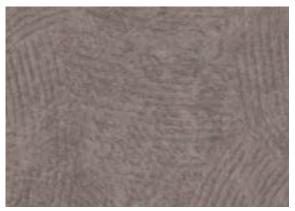

0035 Urban Gris





0037 Urban Souris 84



0958 Urban Beige 84



STRADA



0791 Strada Metallic 84

∧ Scale 1



0790 Strada Chrome 840



0465 Strada Ciment **3**

TARALAY INITIAL - WOOD New











FILAMENT



0826 Filament Grey



0799 Filament Light



RENZO



0590 Renzo Steel







ESTEREL



0636 Esterel Blond 34



TARALAY INITIAL - WOOD New











HABANA



0797 Habana Ivory





0828 Habana Beige





NOMA



0588 Noma Clair





0698 Noma Naturel




TARALAY INITIAL - WOOD New










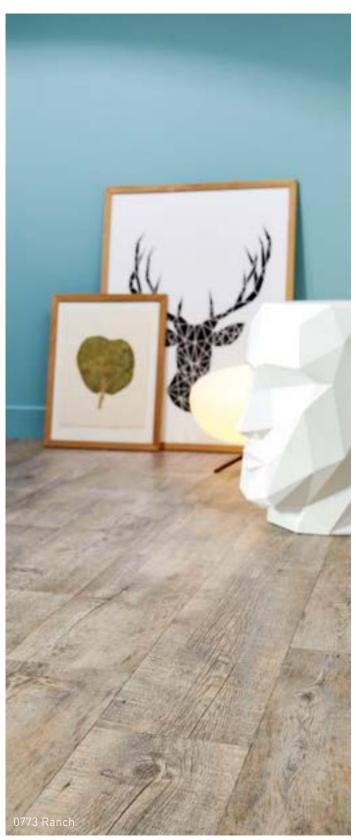

RANCH







0953 Ranch Anthracite 84



BOSTONIAN



0961 Bostonian Honey



0959 Bostonian Brown





0960 Bostonian Grey **84**



TARALAY INITIAL - WOOD New















TWIST


















Design name	Colour	Colour	Pattern	Planks Sizes in cm			
Design name	Reference	Name	Repeat in m	Length	Width		
Bostonian	0959	Brown	1 m x 1 m	100	20		
Bostonian	0960	Grey	1 m x 1 m	100	20		
Bostonian	0961	Honey	1 m x 1 m	100	20		
Esterel	0636	Blond	1 m x 1 m	100	10		
Habana	0828	Beige	1 m x 1 m	100	16.7		
Habana	0638	Ivory	1 m x 1 m	100	16.7		
Noma	0588	Clair	1 m x 1 m	100	16.7		
Noma	0698	Naturel	1 m x 1 m 100		16.7		
Ranch	0773	Ranch	1 m x 1 m	100	16.7		
Ranch	0953	Ranch Anthracite	1 m x 1 m	100	16.7		
Twist	0978	Blond	1 m x 1 m	100	16.7		
Twist	0980	Brown	1 m x 1 m	100	16.7		
Twist	0977	Grey	1 m x 1 m	100	16.7		
Twist	0979	White	1 m x 1 m	100	16.7		

TIMBERLINE



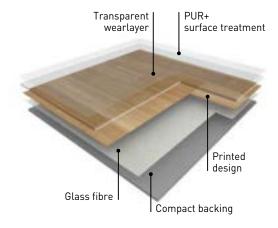

TIMBERLINE is a multilayered, compact floorcovering, available in 2 or 4 m wide sheet with a group T wearing,

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 6 dB sound insulation and an indentation resistance of 0.05 mm.

It is treated with **PUR+**, a surface treatment, which facilitates maintenance and avoids a first acrylic emulsion (metallisation).

This coating is antistatic (Class 1).

This products does not contain any heavy metals or CMR 1&2 and is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m 3 (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.



TIMBERLINE





- ► TIMBERLINE collection available in both 2 and
 - 4 m with a 2.00 mm thickness

• Wood: 24 references • Pixel: 14 references

- ▶ All references available in Compact sheet
- ▶ **PUR+** Polyurethane surface treatment:
 - Easy maintenance

			TIMBERLINE
DESCRIPTION			
Total thickness	EN ISO 24346	mm	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2560
Width of sheet	EN ISO 24341	cm	200 /400
Length of sheet	EN ISO 24341	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bf(-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	Т
Type Binder content	EN ISO 10582	type	1
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	< 0.10
Residual indentation (average measured value)	-	mm	≃ 0.05
Impact sound insulation	EN ISO 717-2	dB	≃ 6
Castor chair test (type H)	ISO 4918	-	0K
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	> 6
Surface treatment	-	-	PUR+
Chemical products resistance ^[1]	EN ISO 26987	-	0K
ENVIRONMENT / INDOOR AIR QUALITY	Y		
TVOC after 28 days	ISO 16000-6	microgram/m³	< 100
CE MARKING			
(6			
EN 14041			B _{II} -s1

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

TIMBERLINE WOOD







AURORE



MAPLE



0422 Maple Light



CABANA OAK



0492 Cabana Oak Brown



NOMA



0476 Noma Miel






1451 Noma Kola



TIMBERLINE WOOD





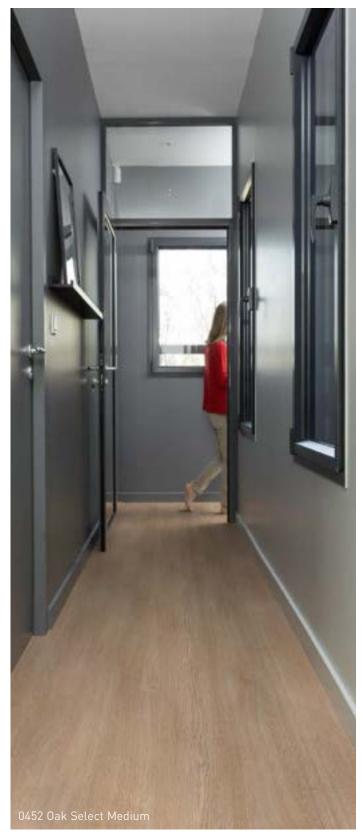

TORONTO







0847 Oak Light





0669 Chene Light



OAK SELECT










0502 Oak Select Grey



TIMBERLINE WOOD

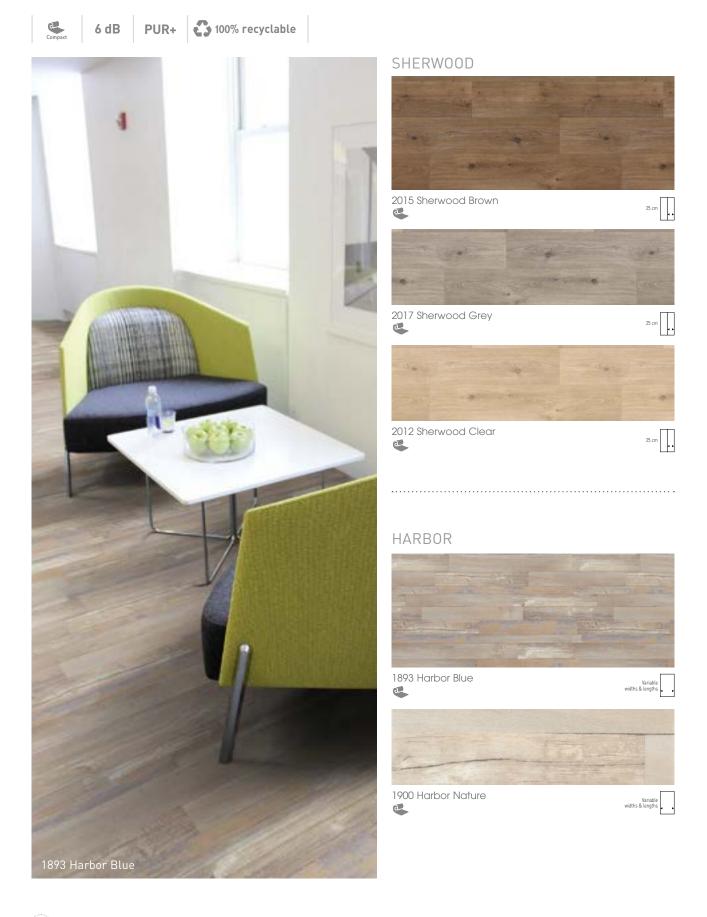

TIMBERLINE WOOD







WHITEWASHED OAK







WALNUT



0562 Walnut Grey Brown



RUSTIC PINE



0432 Rustic Pine Warm Grey



TIMBER




1751 Timber Grey



TIMBERLINE WOOD





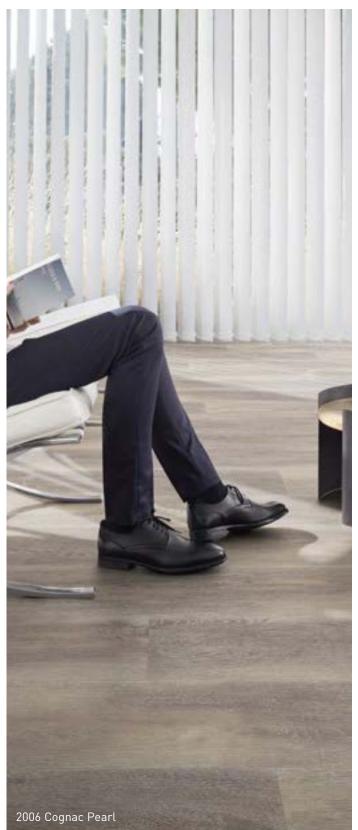

COGNAC







BRUGES









1971 Bruges Clear



FACTORY



1518 Factory White



TIMBERLINE PIXEL







0597 Pixel Silver





2188 Pixel Raspberry




2176 Pixel Taupe



2178 Pixel Paprika








0621 Pixel Vanilla







2180 Pixel Light Green




0632 Pixel Anthracite





2179 Pixel Black






2182 Pixel Ocean



TARASTEP

TARASTEP.....



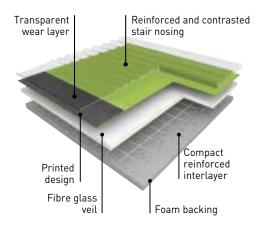


TARASTEP is a multilayered and foam backed complete step with a thickness of 3.35 mm. It comprises a printed design, a vinyl transparent wear layer and a specific embossing on stair nosing for safety.

It is an all-in-one stair covering comprising the stair tread, a ribbed nosing in a contrasted colour and the stair riser. All references have a 70% contrast level between stair tread and stair nosing to increase visibility for visually impaired people.

TARASTEP provides high sound insulation (17 dB).

The emissions of VOC after 28 days (NF EN 16000) are < 100 microgram/m³. It is 100% recyclable.

ACCESS FOR ALL (More details - See pages 300-301)

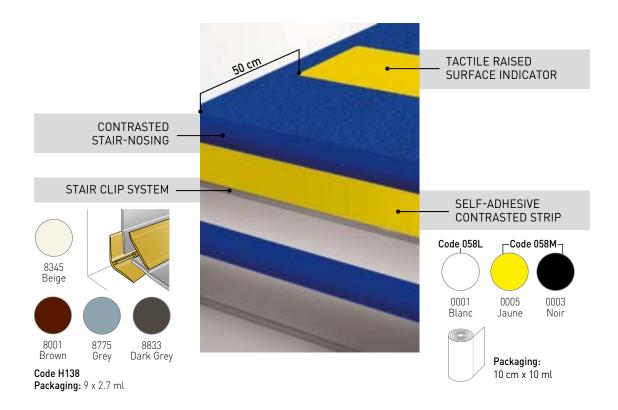

TARASTEP





			TARASTEP
			TANASTEI
DESCRIPTION			
Total thickness	EN ISO 24346	mm	3.35
Thickness of wearlayer	EN ISO 24340	mm	0.85
Weight	EN ISO 23997	g/sqm	3100
Width of sheet	EN ISO 24341	cm	101
Length of sheet	EN ISO 24341	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34-42
Impact sound insulation	EN ISO 717-2	dB	17
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	T
Dimensional stability	EN ISO 23999	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Residual indentation (average measured value)	-	-	0.11
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical products resistance	EN ISO 26987	-	ОК
ENVIRONMENT / INDOOR QUALITY AIR			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 100
CE MARKING			
<i>((()) </i>			
	EN 1404	• 1	C _{II} -s1

TARASTEP























71.2% CONTRAST

77.3% CONTRAST

75.2% contrast

0721 Brun / Beige Clair 70.5% CONTRAST







0719 Carbone / Jaune **72.9**%

TARASTEP








0720 Beige Clair / Brun 81.3% CONTRAST





0722 Gris Clair / Carbone **75.9**% CONTRAST





0714 Gris / Noir **75.6**% CONTRAST





0723 Carbone / Gris Clair **73.3**% CONTRAST





0724 Carbone / Bamboo **73.7**%











0717 Ivoire / Vermillon **71.5**% CONTRAST





0716 Ivoire / Indigo

80.7%








LUXURY VINYL TILE

Creation 70	106-123
Creation 70Creation 70 ClicCreation 70 LooselayCreation 70 Connect	112-119 112-119 112-119 122
Saga ²	124-127
Creation 55	128-14
Creation 55Creation 55 ClicCreation 55 LooselayCreation 55 Looselay Acoustic	136-143 136-143 136-143
Rigid 55 Lock Acoustic	146-15
Creation 30	152-16
Creation 30Creation 30 Clic	156-163 156-163
Rigid 30 Lock	166-169
TopSilence Design	170-173
More than a floor wall & finishes	174


CREATION - LVT

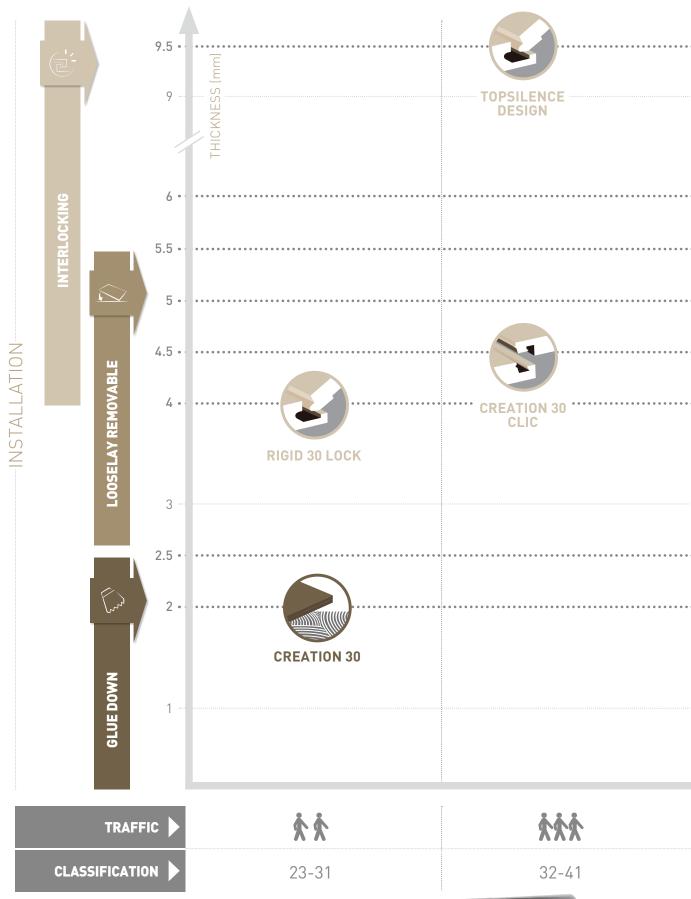

RIGID 55 LOCK ACOUSTIC	CREATION 70CREATION 70 LOOSELAY CLIC
CREATION 55 LOOSELAY ACOUSTIC	
EGOSEEAT AGGOSTIC	
CREATION 55 CLIC	CREATION 70
CREATION 55 LOOSELAY	SAGA ²
LOUSLLAT	
CREATION 55	CREATION 70
	,
ጵ ጵጵ	ጵጵጵጵ
33-42	34-43






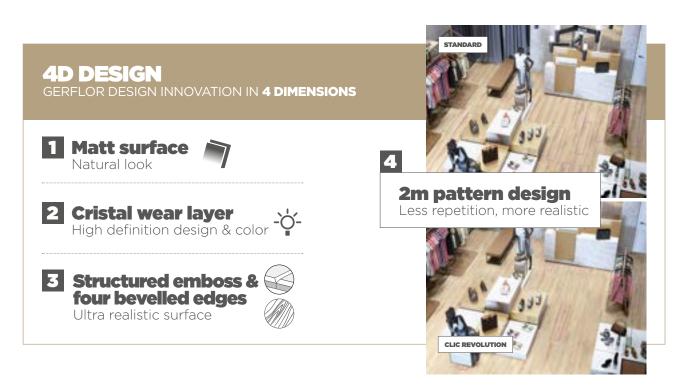

DUO CORE TECHNOLOGY

A UNIQUE TECHNOLOGY COMBINING **COMFORT & STABILITY**

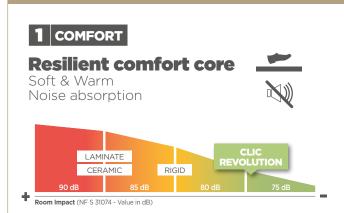

2 STABILITY

Rigid core reinforced by a glass veil

Free adhesive installation Direct installation on ceramic if joint < 4 mm







CLIC REVOLUTION EASY TO INSTALL WITH 100% VERTICAL CLIC

Waterproof joints ______







Heavy load resistance





5X MORE RESISTANT!





PATEMTED

CLIC REVOLUTION

Castor Chair Test

Durable clic system →







Locking Strength Test



LUXURY VINYL TILE

CREATION 70










4D DESIGN

MATT SURFACE



Natural look





High definition design & color

STRUCTURED EMBOSS & BEVEL





Ultra realistic surface

DESIGNS

Wide variety of planks or tiles

RESILIENT COMFORT CORE



Soft underfoot

DIAMOND BACKLAYER

BODY & STRENGTH



Easy handling

BACK EMBOSS

Better subfloor adhesion



Easy positioning

Please refer to Gerflor's installation guidelines






More details on gerflor.com

CREATION 70





•

CREATION 70 DESIGN

CREATION 70 DESIGN is a synthetic, decorative, flexible, antistatic abrasion group T floorcovering available in tile or plank, with beveled edges. It consists in a 0.70 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2.5 mm. It benefits from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

CREATION 70 DESIGN is a glued floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

CREATION 70 DESIGN is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).


			CREATION 70								
				CREATION 70 DESIGN						CREATION 70	
DESCRIPTION											
Total thickness	EN ISO 24346	mm				2.5	i0				2.50
Thickness of wearlayer	EN ISO 24340	mm				0.7	'0				0.70
Weight	EN ISO 23997	g/sqm				410	00				3960
Size	EN ISO 24342	mm	184x1219	230x1500	Mix planks 76/152/228 x914		914x914	457x914	228x914	Mix tiles 152/305/457 x914	208x1243
Number of planks / tiles and sqm per box	-	-	14 ^[1] / 15 3.14 / 3.36	9 / 3.11	8+8+8 / 3.34 m	9 / 3.35	5 / 4.18	9 / 3.76	17 / 3.54	4+4+4 / 3.34	14 / 3.62
CLASSIFICATION											
Norm / Product specification	-	-				EN ISO	10582				EN ISO 10582
European classification	EN ISO 10874	class				34-	43				34-43
Fire rating	EN 13501-1	class				Bfl-	s1				Bfl-s1
Static electrical propensity	EN 1815	kV				< :	2				< 2
Slip resistance wet [2]	DIN 51 130	class				R1	0				R10
PERFORMANCES											
Wear resistance	EN 660.2	mm³				≤ 2	.0				≤ 2.0
Wear group	-	group				Т					T
Type Binder content	ISO 10582	type				I					I
Room impact	NF S 31074	dB				76	5				76
Sound Insulation	EN ISO 717-2	dB				4					4
Dimensional stability (norm)	EN ISO 23999	%				≤ 0.	25				≤ 0.25
Dimensional stability (average measured value)	-	%				≤ 0.	10				≤ 0.10
Residual indentation	EN ISO 24343-1	mm				≤ 0	.10				≤ 0.10
Castor chair test (type H)	ISO 4918	-				Ol	<				0K
Thermal conductivity	EN ISO 10456	W/(m.k)				0.2					0.25
Colour fastness	EN 20 105 - B02	degree				≥ (6				≥ 6
Surface treatment	-	-				PUR+	Matt				PUR+ Matt
Chemical products resistance	EN ISO 26987	-				Oł	<				OK
ENVIRONMENT /INDOOR											
TVOC after 28 days	ISO 16000-6	microgram/m ³							< 10		
Certification	-	-				Floors	core®				Floorscore®
CE MARKING											
(€	EN 14	4041			955				B _{fl} -s		

(1) Regimental Picadilly 0807

(2) Ramp test with oil

LUXURY VINYL TILE

CREATION 70 CLIC









4D DESIGN



CRISTAL WEAR LAYER



STRUCTURED EMBOSS & BEVEL





2M PATTERN DESIGN

Wide variety of planks or tiles

DUO CORE TECHNOLOG¹

RESILIENT COMFORT CORE



RIGID CORE WITH FIBER GLASS VEIL

Soft underfoot







Renovation ceramic 4 mm joint

CLIC REVOLUTION 100% VERTICAL







system

Heavy load resistance



Waterproof joints



a plank



Format: 1 m x 15 lm Ref.: 1798



Please refer to Gerflor's installation guidelines



More details on gerflor.com

CREATION 70 CLIC















391x729 mm





CREATION 70 CLIC is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.70 mm thick transparent wear layer, a design film of 2 m width to have more variety in the design and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 6 mm.

They benefit from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

CREATION 70 CLIC is an interlocking floorcovering assembled with a vertical system on the long and short side for a quick and solid installation. The resistance to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

CREATION 70 CLIC is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant. The product emission rate of organic compounds is $< 10 \, \text{microgram/m}^3 (TVOC < 28 \, \text{days})$ - ISO 16000-6).

			CREATION 70 CLIC		
DESCRIPTION					
Total thickness	EN ISO 24346	mm		6	
Thickness of wearlayer	EN ISO 24340	mm		0.70	
Weight	EN ISO 23997	g/sqm		9850	
Size	EN ISO 24342	mm	214 x 1239	242 x 1461	391 x 729
Number of planks /tiles and sqm per box	-	-	6 / 1.59	5 / 1.77	5 / 1.43
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		34-43	
Fire rating	EN 13501-1	class		Bfl-s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet: ramp test with oil	DIN 51 130	class		R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³		≤ 2.0	
Wear group	-	group		T	
Type Binder content	ISO 10582	type		I	
Dimensional stability (norm)	EN ISO 23999	%		≤ 0.15	
Dimensional stability (average measured value)	-	%		≤ 0.05	
Residual indentation	EN ISO 24343-1	mm		≤ 0.10	
Impact sound insulation	EN ISO 717-2	dB		4	
Room impact	NF S 31074	dB		78	
Castor chair test (type H)	ISO 4918	-		OK	
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN ISO 26987	-		OK	
ENVIRONMENT / INDOOR AIR QUAL	ITY				
TVOC after 28 days	ISO 16000-6	microgram/m³		< 10	
Certification	-	-		Floorscore®	
CE MARKING					
C€	EN 1404	.1 -			
	=1.4 . 1.5		B _{II} -s1		

CREATION 70 LOOSELAY

CREATION 70 LOOSELAY.....



PUR+ MATT



4D DESIGN



CRISTAL WEAR LAYER



STRUCTURED EMBOSS & BEVEL





Ultra realistic surface



Easy mix&match of designs & formats

DUO CORE TECHNOLOGY

RESILIENT COMFORT CORE



Noise absorption

Soft underfoot

RIGID CORE





GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction to the subfloor

Air circulation: better acoustic

Humidity circulation: moisture resistance



Easily removable: renovation

QUICK & EASY TO INSTALL



Installation with tackifier



Apply planks or tiles



Pressure roller

Please refer to Gerflor's installation guidelines



Easy to replace a plank

CREATION 70 LOOSELAY











PUR+ Matt




CREATION 70 LOOSELAY is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.70 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 6 mm. It also includes anti-skid backing to allow an easy installation.

It benefits from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

CREATION 70 LOOSELAY is a looselay floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.


CREATION 70 LOOSELAY is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days - ISO 16000-6).

EXPLORE THE WORLD OF POSSIBILITIES


















		CRE	EATION 70 LOOSE	ELAY	
DESCRIPTION					
Total thickness	EN ISO 24346	mm		6.00	
Thickness of wearlayer	EN ISO 24340	mm		0.70	
Weight	EN ISO 23997	g/sqm		10000	
Size	EN ISO 24342	mm	229 x 1220	600 x 600	914 x 914
Number of planks / tiles and sqm per box	-	-	6 / 1.68	4 / 1.44	2 / 1.67
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		34-43	
Fire rating	EN 13501-1	class		Bfl-s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet: ramp test with oil	DIN 51 130	class		R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³		≤ 2.0	
Wear group	-	group		T	
Type Binder content	ISO 10582	type	I		
Room impact	NF S 31074	dB	73		
Impact sound insulation	EN ISO 717-2	dB	9		
Dimensional stability (norm)	EN ISO 23999	%		≤ 0.15	
Dimensional stability (average measured value)	-	%		≤ 0.05	
Residual indentation	EN ISO 24343-1	mm		≤ 0.10	
Castor chair test (type H)	ISO 4918	-		OK	
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN ISO 26987	-		OK	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³		< 10	
CE MARKING					
(6	EN 14041 -				
	EIN 1404	+1		B _{fl} -s1	









1189 Travertino Grey

228 x 914



1051 Muse Smocked

208 x 1243 214 x 1239



1050 Grace Bay Black

[208 x 1243 | 코- 214 x 1239



0359 Wild Oak



208 x 1243 214 x 1239



1187 Cervino Oak Cold Grey

230 x 1500



0800 Toasted Wood Roadster



1056 Onka Pearl

230 x 1500 242 x 1461



0799 Toasted Wood Cafe

230 x 1500 242 x 1461



1053 Toasted Wood Ash

230 x 1500 | 242 x 1461




1057 Onka Coffee

230 x 1500 242 x 1461







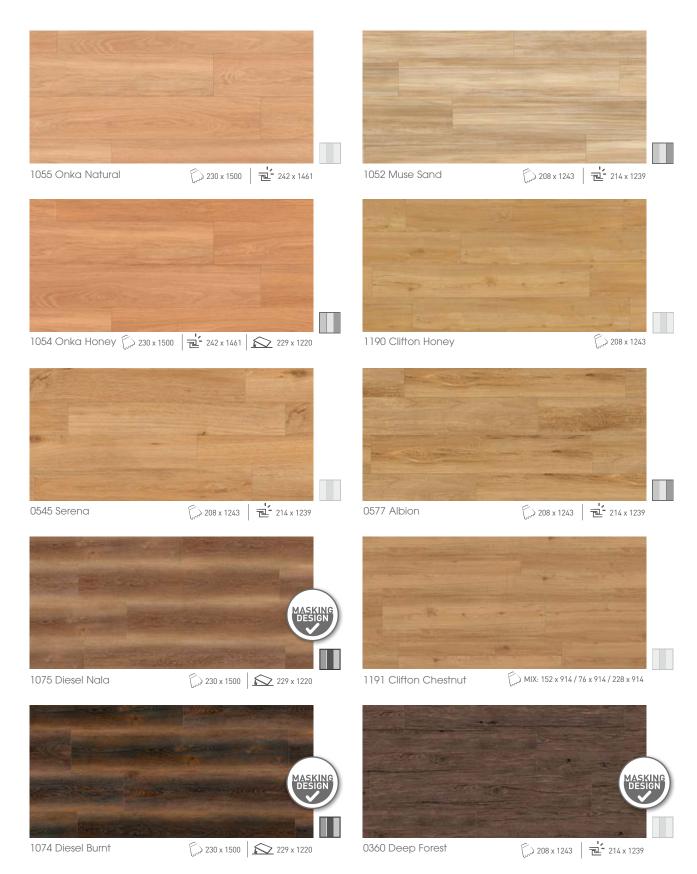











1192 Clifton Grey





1188 Travertino Beige





1049 Grace Bay Cream







0356 Denim Wood







0803 Solid Glam Picadilly






0357 Portobello











0807 Regimental Picadilly







0358 Moon Island € 208 x 1243 214 x 1239 € 229 x 1220





























457 x 914 MIX: 152 x 914 / 305 x 914 / 457 x 914 | 391 x 729 (on demand) 1068 Etna Beige








€ 914 x 914 | = 391 x 729 1063 Pure Concrete Beige



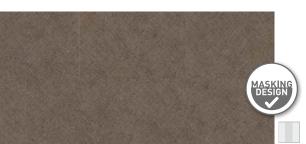

610 x 610 600 x 600 1077 Tatami Savane

1079 Tatami Smoked



610 x 610 600 x 600

610 x 610 600 x 600 1078 Tatami Raffia

1065 Prado Terracotta

€ 457 x 914 391 x 729



0088 Oxyd Pure



1076 Gentleman Tweed




228 x 914 229 x 1220

(117)







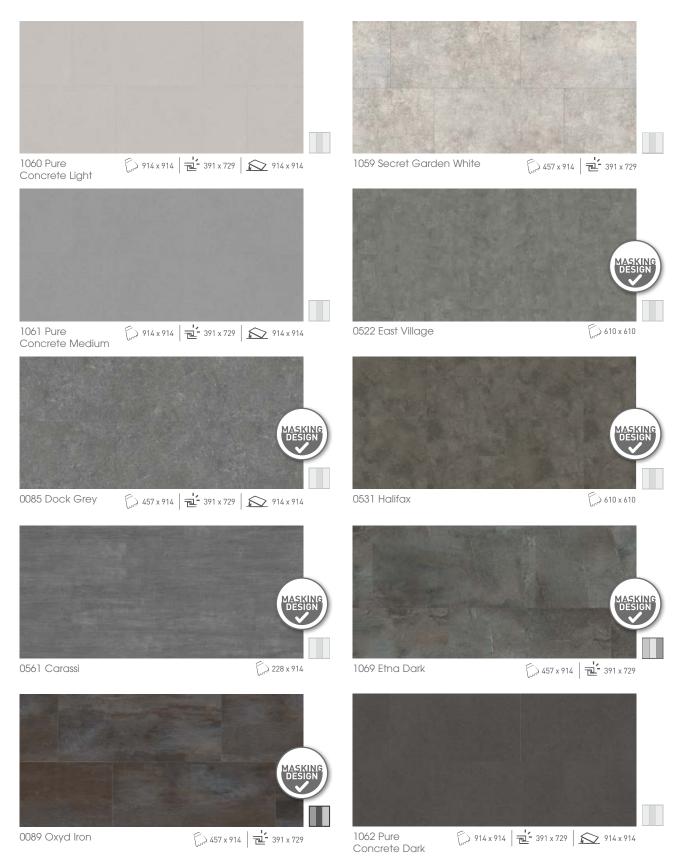









PUR+ Matt 100% recyclable



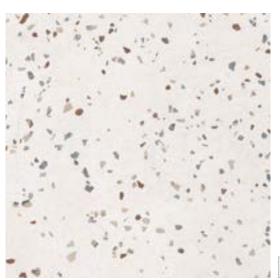

Terrazzo Nature*

√ 914 x 914 391 x 729

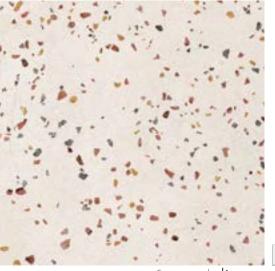

1066 Terrazzo Ocre*

*Scale: 1/5



Light



Medium



High



















1058 Gentleman () 610 x 610 | 2 391 x 729 | 600 x 600 Grey







Interlocking installation with dovetails




Fast and easy renovation



All over effect

CREATION 70 CONNECT.....

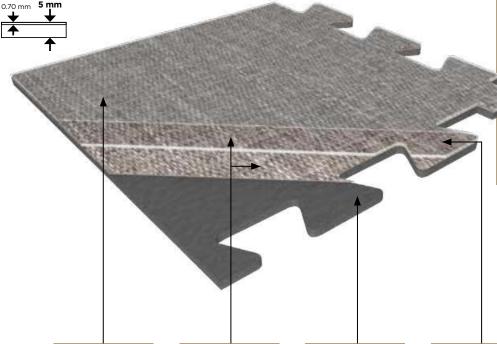

PUR+ MATT



4D DESIGN



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS



Ultra realistic surface

DESIGNS

Designs selected to hide dovetails all over effect

RESILIENT REINFORCED



Glass particles for better stability





Renovation ceramic 5 mm joint

EXCLUSIVE DOVETAILS



Gerflor patented



No adhesive



Easy installation



Avoid mistakes installation



dovetails

Please refer to Gerflor's installation guidelines

More details on gerflor.com

CREATION 70 CONNECT



Removable

5dB



CREATION 70 Connect is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles. It consists in a 0.70 mm thick transparent wear layer, a design film, a calendered layer and a PVC compact sublayer reinforced with fibers. The overall thickness is 5 mm.

It benefits from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

CREATION 70 Connect is an interlocking floorcovering, resistant to use (commercial / industrial use of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

CREATION 70 Connect is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55%of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			CREATION 70 CONNECT
DESCRIPTION			
Total thickness	EN ISO 24346	mm	5.00
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	8235
Tile size	EN ISO 24342	mm	701.3 x 701.3
Number of tiles and sqm per box	-	-	20 / 9.83
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet ^[1]	DIN 51130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	Т
Type Binder content	ISO 10582	group	1
Room impact	NF-S 31074	dB	75
Impact sound insulation	EN ISO 717-2	dB	5
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	0K
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987	-	0K
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
CE MARKING			
C€	EN 14041 -		
			B _{II} -s1

(1) Ramp test with oil

CREATION 70 CONNECT




Removable

5 dB

PUR+ Matt



100% recyclable



0085 Dock Grey



0087 Dock Taupe




0063 Rough Textile Grey



0062 Rough Textile Beige




0089 Gentleman Taupe






0088 Gentleman Grey



1088 Dalma Grey

Scale: 1/5

EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

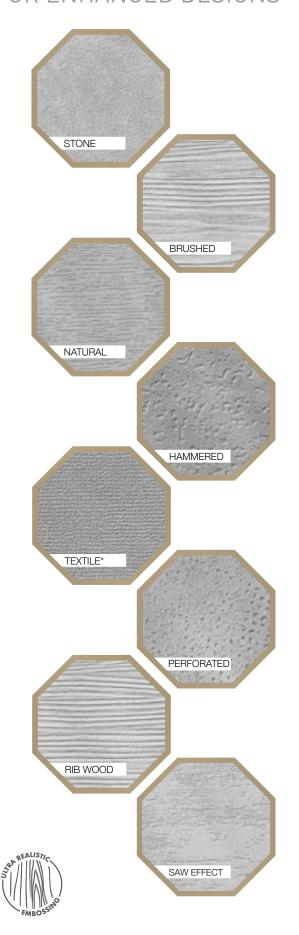

CROSS REFERENCES

			0	0	0	0	
			Z	Ň Z	Z Z	K Zh	GS ING
			CREATION	NOIT	CREATION LOOSELA)	CREATION	EE E
			REA	REA	NEA OO	NEA ON	KR
				1,	<u></u>	الم	SEL
	CODE	EMBOSS	/44	己	\sim	6505	
DOCK GREY DOCK TAUPE	0085	HAMMERED HAMMERED	-	-	-	-	S111 S020
GENTLEMAN GREY	1058	TEXTILE					WHITE
MIDWEST MOON ISLAND	0538 0358	NATURAL BRUSHED	-		-		S039 S034
ONKA HONEY	1054	NATURAL	-	-	•		S121
PORTOBELLO PURE CONCRETE DARK	0357	BRUSHED HAMMERED					S053 WHITE
PURE CONCRETE LIGHT	1060	HAMMERED					WHITE
PURE CONCRETE MEDIUM	1061	HAMMERED	_	_	-		WHITE
ALBION CERVINO OAK BEIGE	0577 0797	NATURAL NATURAL					S108 S011
CERVINO OAK NATURE	0798	NATURAL	-				S109
DEEP FOREST	0360	BRUSHED	-	-			S110
ETNA BEIGE ETNA DARK	1068	HAMMERED HAMMERED					WHITE
GRACE BAY BLACK	1050	NATURAL					WHITE
GRACE BAY CREAM MUSE SAND	1049 1052	NATURAL NATURAL					WHITE S117
MUSE SMOKED	1052	NATURAL		-			S117
ONKA COFFEE	1057	NATURAL	-				WHITE
ONKA NATURAL ONKA PEARL	1055 1056	NATURAL NATURAL					S122 S120
OXYD IRON	0089	PERFORATED	-				WHITE
OXYD PURE	0088	PERFORATED	-	-			WHITE
PURE CONCRETE BEIGE PRADO GREEN	1063 1064	HAMMERED STONE					WHITE
PRADO TERRACOTTA	1065	STONE					WHITE
SECRET GARDEN WHITE SERENA	1059 0545	STONE NATURAL					WHITE S132
TERRAZZO NATURE	1067	STONE	-	-			WHITE
TERRAZZO OCRE	1066	STONE	-	-			WHITE
TOASTED WOOD ASH TOASTED WOOD CAFE	1053 0799	NATURAL NATURAL					WHITE
TOASTED WOOD ROADSTER	0800	NATURAL	-				WHITE
WILD OAK	0359	BRUSHED	-	-			S075
DENIM WOOD DIESEL BURNT	0356	NATURAL			-		S026 WHITE
DIESEL NALA	1074 1075	NATURAL NATURAL					WHITE
GENTLEMAN GARANCE	1080	TEXTILE	-		-		WHITE
GENTLEMAN INDIGO GENTLEMAN	1081	TEXTILE	-		-		WHITE
PEPPERMINT GENTLEMAN TAUPE	1082	TEXTILE					WHITE
GENTLEMAN TWEED	1076	TEXTILE	-		-		WHITE
TATAMI SAVANE	1077	STONE	-		-		WHITE
TATAMI SMOKED TATAMI RAFFIA	1079 1078	STONE	-		-		WHITE
CARASSI	0561	RIB WOOD	-				WHITE
CERVINO OAK COLD	1187	NATURAL	-				WHITE
ČERVINO OAK HONEY CLEAR	1186	NATURAL	_				WHITE
CLIFTON CLIFTON CHESNUT	0556	NATURAL NATURAL					S144 WHITE
CLIFTON GREY	1192	NATURAL	-				WHITE
CLIFTON HONEY	1190	NATURAL	-				WHITE
DOUGLAS EAST VILLAGE	0535 0522	NATURAL STONE					WHITE S154
HALIFAX	0531	STONE					S032
LIMED OAK REGIMENTAL PICADILLY	0329	NATURAL NATURAL	-				S147 WHITE
SILVERSANDS	0324	NATURAL					S146
SOLID GLAM PICADILLY	0803	NATURAL					WHITE
TRAVERTINO BEIGE TRAVERTINO GREY	1188 1189	STONE STONE					WHITE
DALMA BURGUNDY	1089	HAMMERED					WHITE
DALMA GREY	1088	HAMMERED TEVTILE				-	WHITE
ROUGH TEXTILE BEIGE ROUGH TEXTILE GREY	0062	TEXTILE TEXTILE					WHITE
. Available							

PACKAGING

Product size (mm)	m²/box	m² / palette
CREATION 70	75	
184 x 1219	3.36	215.32
184 x 1219*	3.14	213.53
208 x 1243	3.62	195.46
228 x 914	3.54	212.65
230 x 1500	3.11	204.93
457 x 914	3.76	203.09
610 x 610	3.35	187.54
914 x 914	4.18	204.84
MIX Planks	3.34	213.49
MIX Tiles	3.34	200.58
CREATION 70 CLIC		100
214 x 1239	1.59	85.86
242 x 1461	1.77	84.96
391 x 729	1.43	85.80
CREATION 70 LOOSE	LAY	
229 x 1220	1.67	80.2
600 x 600	1.44	72.0
914 x 914	1.67	80.2
CREATION 70 CONNI	ECT	
701 x 701	-	49.14

^{*} Regimental Picadilly 0807



SAGA²



Removable

15 dB



SAGA² is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles. It consists in a 0.70 mm $\,$ thick transparent wear layer, a design film, a calendered layer and a PVC/Cork sublayer which provides acoustic properties with 15 dB impact sound insulation and a walking noise < 65 dB. The overall thickness is 4.6 mm.

It benefits from a **Protecsol®** surface treatment, making maintenance easier and eliminating the need for initial polishes.

SAGA² is a looselay floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

SAGA² is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			SAGA ²
DESCRIPTION			
Total thickness	EN ISO 24346	mm	4.6
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	5595
Tile size	EN ISO 24342	mm	500 x 500
Number of tiles and sqm per box	-	-	10 / 2.50
CLASSIFICATION			
Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet[1]	DIN 51130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	Т
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	< 0.13
Castor chair test (type H)	ISO 4918	-	0K
Impact sound insulation	EN ISO 717-2	dB	15
Room impact	NF-S 31074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	> 6
Surface treatment	-	-	Protecsol®
Chemical products resistance	EN ISO 26987	-	ОК
ENVIRONMENT / INDOOR AIR QUA	LITY		
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE MARKING			
CE	FN4/9/4		
	EN 14041	I	B _{II} -S1

(1) Ramp test with oil

SAGA²






0088 Gentleman Grey



0023 Barma Mystery



0085 Dock Grey



0027 Fiber METAL EFFECT Heavy Metal




0017 Kadina City



0030 Gentleman Blue




0039 Spider Blue



1088 Dalma Grey

Scale: 1/5

SAGA²

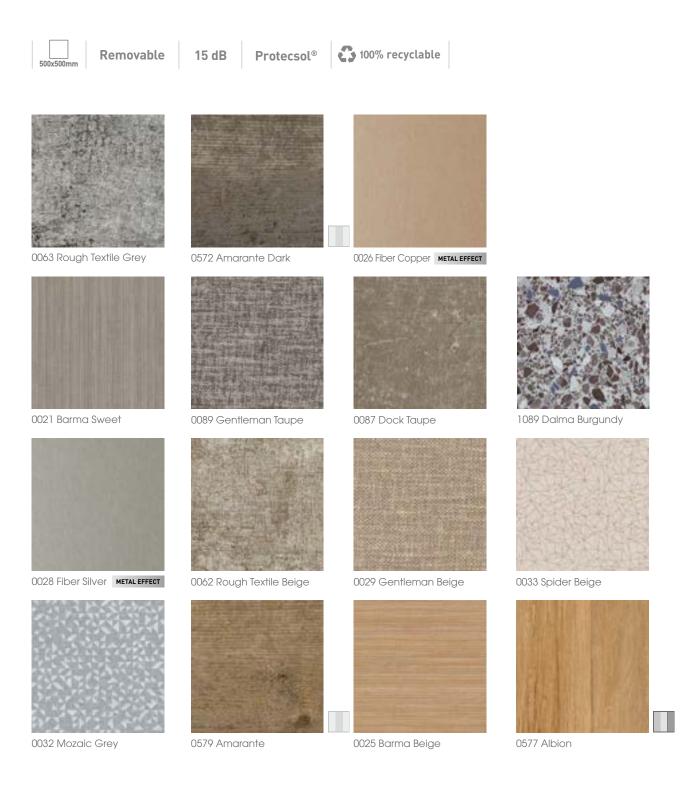

DESIGN SHADE VARIATION:





CREATION 55
















Natural look





High definition design & color

STRUCTURED





Ultra realistic surface

MIX&MATCH DESIGNS

Easy mix&match of designs & formats

RESILIENT COMFORT



DIAMOND BACKLAYER



Easy handling

BACK EMBOSS

Better subfloor adhesion



Easy positioning

UNDERLAY GERFLOR SMART FIX / 16 dB



Please refer to Gerflor's installation guidelines



Format: 1 m x 7.5 lm Ref.: 1698

CREATION 55





CREATION 55 TREND is a synthetic, decorative, flexible, antistatic abrasion group T floorcovering available in tile or plank, with beveled edges. It consists in a 0.55 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2.5 mm.


It benefits from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

CREATION 55 TREND is a glued floorcovering, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

CREATION 55 TREND is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			CREATION 55 TREND							
DESCRIPTION										
Total thickness	EN ISO 24346	mm			2.50					
Thickness of wearlayer	EN ISO 24340	mm	0.55							
Weight	EN ISO 23997	q/sqm			3850					
Size	EN ISO 24342	mm	184 x 1219	230 x 1500	152 x 762	457 x 914	610 x 610			
Number of planks /tiles and sqm per box	-	-	15 / 3.36	9 / 3.11	33 / 3.82	9 / 3.76	9 / 3.35			
CLASSIFICATION										
Norm / Product specification	-	-			EN ISO 10582					
European classification	EN ISO 10874	class			33-42					
Fire rating	EN 13501-1	class			B _{fl} -s1					
Static electrical propensity	EN 1815	kV			< 2					
Slip resistance wet: ramp test with oil	DIN 51 130	class			R10					
PERFORMANCES										
Wear resistance	EN 660.2	mm³	≤ 2.0							
Wear group	-	group	T				Т			
Type Binder content	ISO 10582	type								
Room impact	NF S 31074	dB			77					
Impact sound insulation	EN ISO 717-2	dB	4							
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25							
Dimensional stability (average measured value)	-	%	≤ 0.10							
Residual indentation	EN ISO 24343-1	mm			≤ 0.10					
Castor chair test (type H)	ISO 4918	-			OK					
Thermal conductivity	EN ISO 10456	W/(m.k)			0.25					
Colour fastness	EN 20 105 - B02	degree			≥ 6					
Surface treatment	-	-			PUR+ Matt					
Chemical products resistance	EN ISO 26987	-			OK					
ENVIRONMENT / INDOOR AIR QU	JALITY									
TVOC after 28 days	ISO 16000-6	microgram/m³			< 10					
Certification	-	-	Floorscore®							
CE MARKING										
(6	EN 140	141			DS					
	LIN 140	, ·	B _{IT} -SI							

CREATION 55 CLIC





PUR+ MATT



4D DESIGN



CRISTAL WEAR LAYER



STRUCTURED EMBOSS & BEVEL



Wide variety of planks or tiles

DUO CORE TECHNOLOGY

RESILIENT COMFORT CORE



Soft underfoot

RIGID CORE WITH FIBER GLASS VEIL





Renovation ceramio

CLIC REVOLUTION 100% VERTICAL









Heavy load resistance





Easy to change a plank

Please refer to Gerflor's installation guidelines



Format: 1 m x 15 lm Ref.: 1798



Format: 1.18 m x 8.5 lm Ref.: 5949



More details on gerflor.com

CREATION 55 CLIC











242x1461 mm

m 391x729 mm

PUR+ Matt



CREATION 55 CLIC is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.55 mm thick transparent wear layer, a design film of 2 m width to have more variety in the design and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 5 mm.

It benefits from a cross-linked polyurethane surface treatment [**PUR+ MATT**], making maintenance easier and eliminating the need for initial polishes.

CREATION 55 CLIC is an interlocking floorcovering assembled with a vertical system on the long and short side for a quick and solid installation. The resistance to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has B_{fl} -s1 class for smoke emission according to EN 13501-1.

CREATION 55 CLIC is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is 100% compliant with REACH. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			CREATION 55 CLIC		
DESCRIPTION					
Total thickness	EN ISO 24346	mm	5.00		
Thickness of wearlayer	EN ISO 24340	mm		0.55	
Weight	EN ISO 23997	g/sqm		8230	
Size	EN ISO 24342	mm	214 x 1239	242 x 1461	391 x 729
Number of planks /tiles and sqm per box	EN ISO 24342	mm	7 / 1.86	6 / 2.12	6 / 1.71
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		33-42	
Fire rating	EN 13501-1	class		Bfl-s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet: ramp test with oil	DIN 51 130	class		R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³	< 2.0		
Wear group	-	group	T		
Type Binder content	ISO 10582	type	I		
Room impact	NF S 31074	dB	78		
Impact sound insulation	EN ISO 717-2	dB	4		
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value)	-	%	< 0.05		
Residual indentation	EN ISO 24343-1	mm		≤ 0.10	
Castor chair test (type H)	ISO 4918	-		0K	
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN 423	-		0K	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³		< 10	
Certification	-	-	Floorscore®		
CE MARKING					
C€	EN 14041 –				
				B _{II} -s1	

CREATION 55 LOOSELAY









4D DESIGN



CRISTAL WEAR LAYER



STRUCTURED



MIX&MATCH DESIGNS

Easy mix&match of designs & formats

DUO CORE TECHNOLOGY

RESILIENT COMFORT CORE



RIGID CORE





< 5 mm joint

No adhesive up to 30 m²

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction to the subfloor

Air circulation: better acoustic

Humidity circulation: moisture resistance



Easily removable: renovation

QUICK & EASY TO INSTALL



Installation with tackifier



Apply planks or tiles



Pressure roller



Please refer to Gerflor's installation guidelines



Easy to replace a plank

CREATION 55 LOOSELAY




CREATION 55 LOOSELAY is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks. It consists in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 4.5 mm. It also includes anti-skid backing to allow an easy installation and a glue-free installation up to 30 sqm.

It benefits from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

CREATION 55 LOOSELAY is a looselay floorcovering, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has $B_{\rm fl}$ -s1 class for smoke emission according to EN 13501-1.

CREATION 55 LOOSELAY is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).


EXPLORE THE WORLD OF POSSIBILITIES



			CREATION 5	5 LOOSELAY
DESCRIPTION				
Total thickness	EN ISO 24346	mm	4.5	50
Thickness of wearlayer	EN ISO 24340	mm	3.0	55
Weight	EN ISO 23997	g/sqm	75	00
Size	EN ISO 24342	mm	229 x 1219	500 x 500
Number of planks / tiles and sqm per box	-	-	8 / 2.23	8 /2.0
CLASSIFICATION				
Norm / Product specification	-	-	EN ISO	10582
European classification	EN ISO 10874	class	33-	42
Fire rating	EN 13501-1	class	Bfl-	-s1
Static electrical propensity	EN 1815	kV	<	2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R1	0
PERFORMANCES				
Wear resistance	EN 660.2	mm³	≤ 2	!.O
Wear group	-	group	T	
Type Binder content	ISO 10582	type	I	
Room impact	NF S 31074	dB	7:	3
Room sound insulation	EN ISO 717-2	dB	7	
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.	.15
Dimensional stability (average measured value)	EN ISO 23999	%	≼ 0.	.05
Residual indentation	EN ISO 24343-1	mm	≼ 0.	.10
Castor chair test (type H)	ISO 4918	-	0	K
Thermal conductivity	EN ISO 10456	W/(m.k)	0.2	25
Colour fastness	EN 20 105 - B02	degree	≽	6
Surface treatment	-	-	PUR+	Matt
Chemical products resistance	EN ISO 26987	-	0	K
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	microgram/m³	< 1	10
CE MARKING				
C€	EN 14041			

CREATION 55 LOOSELAY ACOUSTIC

CREATION 55 LOOSELAY ACOUSTIC.....

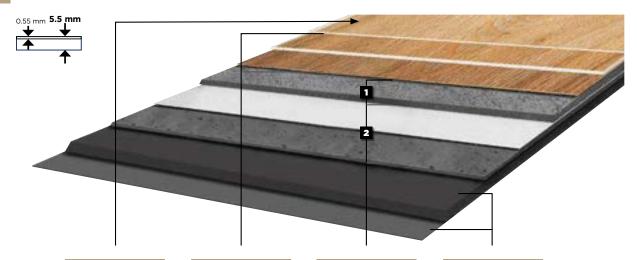














DUO CORE TECHNOLOGY

RESILIENT COMFORT CORE





INSULATION ULTRA





Product available on order with a minimum order quantity of 500 sqm and a lead time of 4 months.

QUICK & EASY TO INSTALL



Installation with tackifier



Apply planks or tiles



Pressure roller



Please refer to Gerflor's installation guidelines

Easy to replace a plank

CREATION 55 LOOSELAY ACOUSTIC







PUR+ Matt




CREATION 55 LOOSELAY ACOUSTIC is a synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings available in tiles and planks with bevelled edges. It consists in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The backing integrates an acoustic core reaching 19 dB acoustic impact noise reduction. The overall thickness is 5.5 mm.

They benefit from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.


CREATION 55 LOOSELAY ACOUSTIC is a looselay floorcovering, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

CREATION 55 LOOSELAY ACOUSTIC is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).


EXPLORE THE WORLD OF POSSIBILITIES















			CREATION 55 LOO	SELAY ACOUSTIC
DESCRIPTION				
Total thickness	EN ISO 24346	mm	5.50	
Thickness of wearlayer	EN ISO 24340	mm	0.1	55
Weight	EN ISO 23997	g/sqm	76	00
Size	EN ISO 24342	mm	229 x 1219	500 x 500
Number of planks / tiles and sqm per box	-	-	8 / 2.23	8 /2.0
CLASSIFICATION				
Norm / Product specification	-	-	EN	651
European classification	EN ISO 10874	class	33-	42
Fire rating	EN 13501-1	class	Bfl	-s1
Static electrical propensity	EN 1815	kV	<	2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R′	10
PERFORMANCES				
Wear resistance	EN 660.2	mm³	≤ 2.0	
Wear group	-	group	Т	
Room impact	NF S 31074	dB	70	
Room sound insulation	EN ISO 717-2	dB	19	
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	
Dimensional stability (average measured value)	EN ISO 23999	%	≤ 0	.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.20	
Castor chair test (type H)	ISO 4918	-	0	K
Thermal conductivity	EN ISO 10456	W/(m.k)	0.3	25
Colour fastness	EN 20 105 - B02	degree	>	6
Surface treatment	-	-	PUR+	Matt
Chemical products resistance	EN ISO 26987	-	0	K
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	microgram/m³	< '	10
CE MARKING				
(6	EN 14041 -			
				<u>s1</u>



CREATION 55 /

CREATION 55 CLIC /
CREATION 55 LOOSELAY / LOOSELAY ACOUSTIC





0584 White Lime





0816 Northwood Macchiato





0853 Bostonian Oak Beige












0856 Paint Wood Taupe





0068 Mansfield Light

🔝 184 x 1219



0456 Ranch

184 x 1219 214 x 1239 229 x 1220



0447 Amador



0810 Chevron Moka




0847 Swiss Oak Smoked

184 x 1219 214 x 1239 230 x 1500 242 x 1461







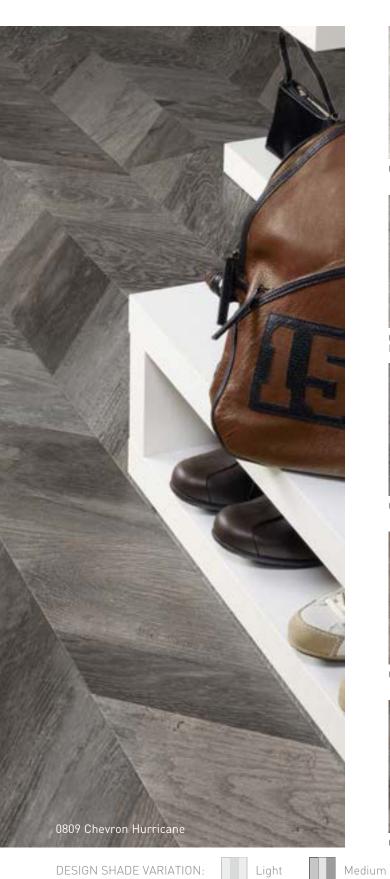











0809 Chevron Hurricane





CREATION 55 /
CREATION 55 CLIC /
CREATION 55 LOOSELAY / LOOSELAY ACOUSTIC





0448 Malua Bay

(L) 184 x 1219 214 x 1239 229 x 1220



0863 Eramosa Beige





0857 Stripe Oak Honey







0441 Honey Oak







0069 Mansfield Natural





0817 Northwood Mokaccino



0871 Bostonian Oak



0455 Longboard





(i) 184 x 1219 214 x 1239 229 x 1220






0811 Chevron Buckwheat

(184 x 1219







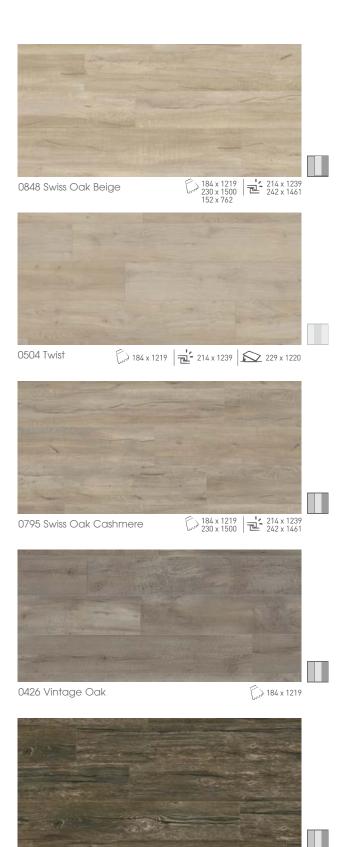





(m) 184 x 1219 214 x 1239







0458 Aspen



CREATION 55 /
CREATION 55 CLIC /
CREATION 55 LOOSELAY / LOOSELAY ACOUSTIC





0812 Royal Oak Blond





0796 Swiss Oak Golden

184 x 1219 230 x 1500 242 x 1461 229 x 1220



0459 Brownie

184 x 1219 | 214 x 1239



0461 Michigan

184 x 1219 214 x 1239



0740 Royal Oak Coffee

(184 x 1219




(141)







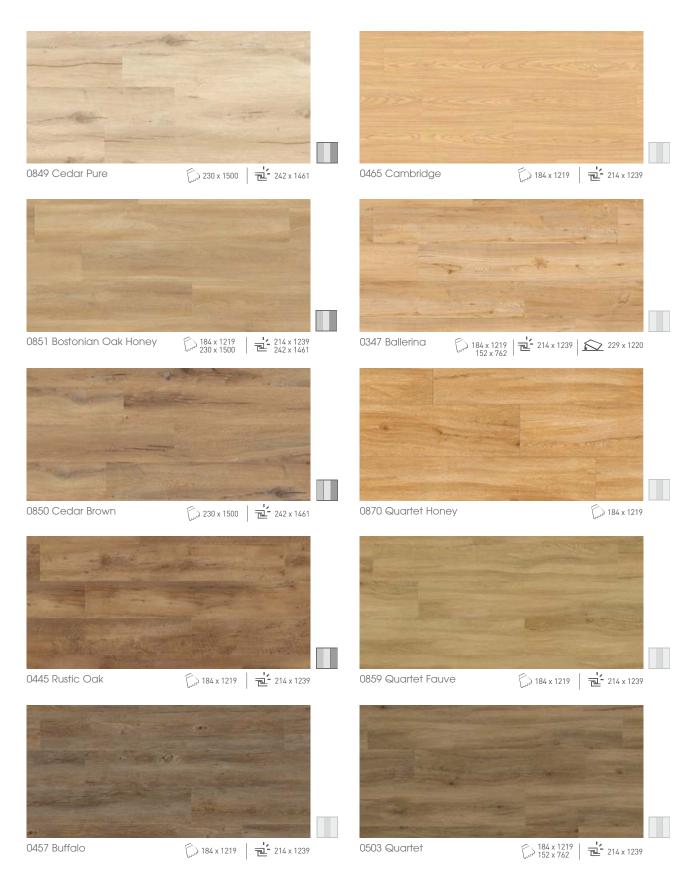





CREATION 55 /
CREATION 55 CLIC /
CREATION 55 LOOSELAY / LOOSELAY ACOUSTIC PUR+ Matt 100% recyclable € 457 x 914 391 x 729 € 610 x 610 391 x 729 0861 Reggia Ivory 0866 Bloom Taupe 0618 Carmel € 457 x 914 | = 391 x 729 | € 500 x 500 610 x 610 391 x 729 0868 Bloom Uni Taupe 457 x 914 [610 x 610 | 글 391 x 729 0751 Durango Taupe 0862 Reggia Taupe € 457 x 914 610 x 610 391 x 729 0094 Rust Metal 0373 Silver City

0860 Norvegian Stone

€ 457 x 914 391 x 729 500 x 500


€ 457 x 914 391 x 729

0095 Rust Corten







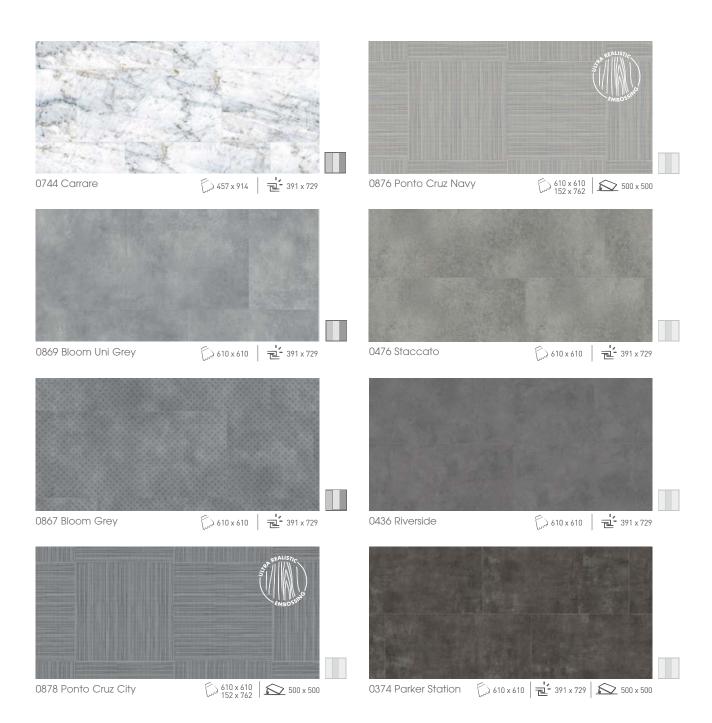

DESIGN SHADE VARIATION: Light







CROSS REFERENCES EMBOSS CODE SAW EFFECT S004 0060 SAW EFFECT ARFNA 5026 0347 BALLERINA NATURAL S008 CARMEL 0618 HAMMERED S020 HONEY OAK 0441 NATURAL S033 0455 LONG BOARD S034 MALUA BAY 0448 BRUSHED S035 NORVEGIAN STONE 0860 HAMMERED S042 0374 HAMMERED PARKER STATION S047 RANCH 0456 BRUSHED S053 SWISS OAK GOLDEN 0796 NATURAL S015 SWISS OAK PEARL 0846 NATURAL S014 TWIST 0504 NATURAL S039 0579 AMARANTE BRUSHED S005 **ASPEN** 0458 BRUSHED S006 BLOOM GREY 0867 HAMMERED S069 **BLOOM TAUPE** 0866 HAMMERED S070 0869 HAMMERED S071 BLOOM UNI TAUPE 0868 HAMMERED S072 0871 NATURAL **BOSTONIAN OAK** S016 BOSTONIAN OAK BEIGE 0853 NATURAL S017 **BOSTONIAN OAK GREY** 0855 NATURAL S018 BOSTONIAN OAK HONE 0851 NATURAL S019 BROWNIE 0459 NATURAL S073 BUFFALO 0457 BRUSHED S075 CAMBRIDGE 0465 NATURAL S065 0744 CARRARE STONE S021 CEDAR BROWN 0850 NATURAL S024 CEDAR PURE 0849 NATURAL S025 DURANGO TAUPE 0751 HAMMERED S027 ERAMOSA BEIGE 0863 NATURAL S028 0461 BRUSHED MICHIGAN S038 0061 BRUSHED S043 OXFORD PAINT WOOD TAUPE 0856 BRUSHED 5046 QUARTET 0503 NATURAL S056 QUARTET FAUVE 0859 NATURAL S057 REGGIA IVORY 0861 STONE S054 0436 HAMMERED RIVERSIDE S032 0095 PERFORATED RUST CORTEN S044 0445 **BRUSHED** RUSTIC OAK S062 SILVER CITY 0373 HAMMERED S048 STACCATO 0476 PERFORATED S064 STRIPE OAK HONEY 0857 NATURAL S010 0858 STRIPE OAK ICE S009 0848 NATURAL SWISS OAK BEIGE SO11 SWISS OAK CASHMERE 0795 NATURAL S012 SWISS OAK SMOKED 0847 NATURAL S013 WHITE LIME 0584 SAW EFFECT S074 PONTO CRUZ CITY 0878 TEXTILE S052 0876 TEXTILE PONTO CRUZ NAVY S051 0811 CHEVRON CHEVRON BUCKWHEAT S029 CHEVRON 0809 S030 CHEVRON HURRICANE CHEVRON MOKA 0810 CHEVRON S031 MANSFIELD LIGHT 0068 BRUSHED 5036 MANSFIELD NATURAL 0069 BRUSHED S037 0816 BRUSHED NORTHWOOD MACHIATTO S040 0817 BRUSHED NORTHWOOD MOKACCINO S041 0870 NATURAL S058 QUARTET HONEY REGGIA TAUPE 0862 STONE 5055 ROYAL OAK BLOND 0812 ROYAL OAK S060 ROYAL OAK COFFEE 0740 ROYAL OAK S061 RUST METAL 0094 PERFORATED S045 VINTAGE OAK 0426 BRUSHED S063


PACKAGING

Product size (mm)	m² / box	m² / palette
CREATION 55	1	
152 x 762	3.82	214.04
184 x 1219	3.36	215.32
184 x 1219*	3.14	213.53
230 x 1500	3.11	214.25
457 x 914	3.76	218.04
610 x 610	3.35	187.54
CREATION 55 CLIC	HI	1 1
214 x 1239	1.86	106
242 x 1461	2.12	101.8
391 x 729	1.71	102.6
CREATION 55 LOOSEL	AY	191
229 x 1220	2.23	124.88
500 x 500	2	128
+ 01151/501/1 : 1		

* CHEVRON design only

Creation

EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

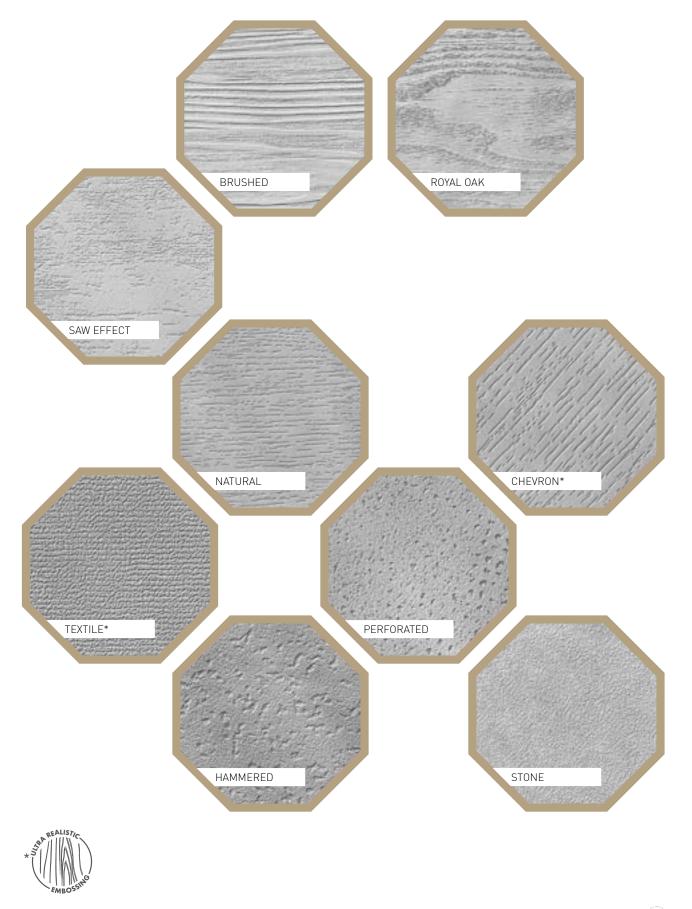

RIGID 55 LOCK ACOUSTIC





PUR+ MATT



4D DESIGN



CRISTAL WEAR LAYER High definition design & color

STRUCTURED EMBOSS & BEVEL



XL FORMAT Wide variety of tiles & planks

FULL RIGID



INSULATION ULTRA





LOCK **SYSTEM**



Please refer to Gerflor's installation guidelines

- DESIGN SKIRTINGS (see page 174)
- ENTRANCE MATS (see page 175)

RIGID 55 LOCK ACOUSTIC









RIGID 55 LOCK ACOUSTIC is a synthetic, decorative, rigid, antistatic floorcovering, available in tiles and planks, with bevelled edges. It consists in a 0.55 mm thick transparent wear layer, a design film, a rigid core board technology and an acoustic underlay integrated reaching 19 dB insulation. The overall thickness is 6 mm.

It benefits from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

RIGID 55 LOCK ACOUSTIC is an interlocking floorcovering assembled with an interlocking system, resistant to use (commercial / industrial use) of 33-42 according to EN-ISO 10874 and has B_{fl} -s1 class for smoke emission according to EN 13501-1.

RIGID 55 LOCK ACOUSTIC is phthalate free, except recycled content. It is 100% recyclable. It is REACH compliant. The product emission rate of organic compounds is < 100 microgram/m³ (TVOC < 28 days - ISO 16000-6).

			RIGID 55 LOCK ACOUSTIC		
DESCRIPTION					
Total thickness	EN ISO 24346	mm		6.00	
Thickness of wearlayer	EN ISO 24340	mm		0.55	
Weight	EN ISO 23997	g/sqm		9480	
Size	EN ISO 24342	mm	177 x 1219	225 x 1524	457 x 914
Number of planks /tiles and sqm per box	-	-	8 / 1.73	5 / 1.71	4 / 1.67
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		33-42	
Fire rating	EN 13501-1	class		B _{fl} -s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet	DIN 51 130	class		R10 ^[1]	
PERFORMANCES					
Wear resistance	EN 660.2	mm³		≤ 2.0	
Wear group	-	group		Т	
Type Binder content	EN ISO 10582	type	I		
Room impact	NF S 31074	dB	81		
Impact sound insulation	EN ISO 717-2	dB	19		
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value)	-	%		≤ 0.05	
Residual indentation	EN ISO 24343-1	mm		< 0.10	
Castor chair test (type H)	ISO 4918	-		OK	
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN ISO 26987	-		OK	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³		< 100	
CE MARKING					
(6	EN 14041		67		
	LI 17071			B _{ff} -s1	

RIGID 55 LOCK ACOUSTIC









RIGID 55 LOCK ACOUSTIC













0005 Cocha







0018 Kilda Cashmere

225 x 1524 mm

177 x 1219 mm



177 x 1219 mm 0004 Sucre



177 x 1219 mm 0003 Viajo



0002 Hobart



0001 Puerto 177 x 1219 mm



0015 Kilda Golden

225 x 1524 mm



177 x 1219 mm 0979 Crunchy



225 x 1524 mm 0016 Puno Brown

DESIGN SHADE VARIATION:



Light



Medium



RIGID 55 LOCK ACOUSTIC









0007 Quito

177 x 1219 mm



0006 Uyuni Taupe

177 x 1219 mm



0010 Cartago

177 x 1219 mm



0020 Kilda Smoked

225 x 1524 mm

RIGID 55 LOCK ACOUSTIC

















0012 Geelong Grey

457 x 914 mm



0013 Bello

457 x 914 mm



0014 Noosa Corten

457 x 914 mm



0011 Trondheim

457 x 914 mm

CROSS REFERENCES / RIGID 55 LOCK SYSTEM & CREATION 55

RIGID 55 LOCK ACOUSTIC	CREATION 55 GLUE DOWN / CLIC	CREATION 55 LOOSELAY
Cartago 0010	Amador 0447	Amador 0447
Hobart 0002	Ballerina 0347	Ballerina 0347
Kilda Cashmere 0018	Swiss Oak Cashmere 0795	-
Kilda Smoked 0020	Swiss Oak Smoked 0847	-
Kilda Pearl 0019	Swiss Oak Pearl 0846	Swiss Oak Pearl 0846
Kilda Golden 0015	Swiss Oak Golden 0796	Swiss Oak Golden 0796
Viajo 0003	Bostonian Oak 0871	-
Viajo Grey 0009	Bostonian Oak Grey 0855	-
Puno Brown 0016	Cedar Brown 0850	-
Puno Pure 0017	Cedar Pure 0849	-
Bello 0013	Carmel 0618	Carmel 0618
Quito 0007	Arena 0060	Arena 0060
Cocha 0005	Malua Bay 0448	Malua Bay 0448
Sucre 0004	Twist 0504	Sucre 0004
Trondheim 0011	Norvegian Stone 0860	Norvegian Stone 0860
Noosa Corten 0014	Rust Corten 0095	-
Uyuni Taupe 0006	Paint Wood Taupe 0856	-
Lovina 0008	Ranch 0456	Ranch 0456
Puerto 0001	Quartet 0503	-
Geelong Grey 0012	Bloom Uni Grey 0869	-
Crunchy 0979	Buffalo 0457	-
Suave Grey 0977	Oxford 0061	-







CREATION 30





PUR+ MATT



4D DESIGN





Natural look

CRISTAL WEAR LAYER



design & color STRUCTURED EMBOSS & MICRO-BEVEL



Ultra realistic surface

DESIGNS

Wide variety of planks or tiles



DIAMOND BACKLAYER

BODY & STRENGTH



Easy handling

BACK EMBOSS

Better subfloor adhesion



Easy positioning

UNDERLAY GERFLOR SMART FIX / 16 dB



Format: 1 m x 7.5 lm Ref.: 1698



More details on gerflor.com

Please refer to Gerflor's installation guidelines

Creation

CREATION 30







CREATION 30 DESIGN is a synthetic, decorative, flexible, antistatic abrasion group T floorcovering available in tile or plank, with bevelled edges. It consists in a 0.3 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2 mm.


It benefits from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

CREATION 30 DESIGN is a glued floorcovering, resistant to use (residential/commercial use) of 23-31 according to EN-ISO 10874 and has $B_{\rm fl}$ -s1 class for smoke emission according to EN 13501-1.

CREATION 30 DESIGN is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			CREATION 30			
			DESIGN			
DESCRIPTION						
Total thickness	EN ISO 24346	mm		2.00		
Thickness of wearlayer	EN ISO 24340	mm		0.30		
Weight	EN ISO 23997	g/sqm	3460			
Size	EN ISO 24342	mm	184 x 1219	230 x 1500	457 x 914	610 x 610
Number of planks /tiles and sqm per box	-	-	15 / 3.36 14 / 3.14 (Chevron)	11 / 3.80	9 / 3.76	9 / 3.35
CLASSIFICATION						
Norm / Product specification	-	-		EN ISO 10	582	
European classification	EN ISO 10874	class		23 - 31		
Fire rating	EN 13501-1	class		B _{fl} -s1		
Static electrical propensity	EN 1815	kV	< 2			
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10			
PERFORMANCES						
Wear resistance	EN 660.2	mm³	≤ 2.0			
Wear group	-	group	T			
Type Binder content	ISO 10582	type				
Room impact	NF S 31074	dB	77			
Impact sound insulation	EN ISO 717-2	dB	4			
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25			
Dimensional stability (average measured value)	-	%	≤ 0.10			
Residual indentation	EN ISO 24343-1	mm	≤ 0.10			
Castor chair test (type H)	ISO 4918	-		0K		
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25		
Colour fastness	EN 20 105 - B02	degree		≥ 6		
Surface treatment	-	-		PUR+ Ma	att	
Chemical products resistance	EN ISO 26987	-		OK		
ENVIRONMENT / INDOOR AIR QUALITY						
TVOC after 28 days	ISO 16000-6	microgram/m³		< 10		
CE MARKING						
(6	FN 1/10	6 1		DS DS		
	EN 14041		B _{II} -s1			

CREATION 30 CLIC





PUR+ MATT



4D DESIGN



CRISTAL WEAR LAYER



STRUCTURED EMBOSS & BEVEL



2M PATTERN DESIGN

Wide variety of planks or tiles

DUO CORE TECHNOLOGY





Soft underfoot

RIGID CORE WITH FIBER GLASS VEIL





Renovation ceramic 4 mm joint

CLIC REVOLUTION 100% VERTICAL







system

Heavy load resistance



Waterproof joints



Please refer to Gerflor's installation guidelines



Format: 1 m x 15 lm Ref.: 1798



Format: 1.18 m x 8.5 lm Ref.: 5949



CREATION 30 CLIC















PUR+ Matt



CREATION 30 CLIC is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles and planks, with bevelled edges. It consists in a 0.4 mm thick transparent wear layer, a design film of 2 m width to have more variety in the design and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 4.5 mm.

It benefits from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

CREATION 30 CLIC is an interlocking floorcovering assembled with a vertical system on the long and short side for a quick and solid installation. The resistance to use (commercial / industrial use) of 23-32 according to EN-ISO 10874 and has B_{fl} -\$1 class for smoke emission according to EN 13501-1.

CREATION 30 CLIC is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is 100% compliant with REACH. The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			CREATION 30 CLIC		
DESCRIPTION					
Total thickness	EN ISO 24346	mm	4.50		
Thickness of wearlayer	EN ISO 24340	mm	0.40		
Weight	EN ISO 23997	g/sqm		7385	
Plank size	EN ISO 24342	mm	214 x 1239 242 x 1461 391 x		391 x 729
Number of planks /tiles and sqm per box	-	-	8 / 2.12 7 / 2.47 8 /		8 / 2.28
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		32	
Fire rating	EN 13501-1	class		B _{fl} -s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet: ramp test with oil	DIN 51 130	class		R10	
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 2.0		
Wear group	-	group	Т		
Type Binder content	ISO 10582	type	I		
Room impact	NF S 31074	dB	78		
Impact sound insulation	EN ISO 717-2	dB	4		
Dimensional stability (norm)	EN ISO 23999	%	< 0.15		
Dimensional stability (average measured value)	-	%	≤ 0.05		
Residual indentation	EN ISO 24343-1	mm	< 0.10		
Castor chair test (type H)	ISO 4918	-	ОК		
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN ISO 26987	-		OK	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10		
Certification	-	-	Floorscore®		
CE MARKING					
(6	EN 14041 -				
			B _{II} -s1		

CREATION 30 / CREATION 30 CLIC







0584 White Lime







0853 Bostonian Oak Beige

184 x 1219 214 x 1239 230 x 1500 242 x 1461



0456 Ranch

184 x 1219 214 x 1239 230 x 1500 242 x 1461



0738 Alamo Sand

184 x 1219




0458 Aspen

184 x 1219 214 x 1239





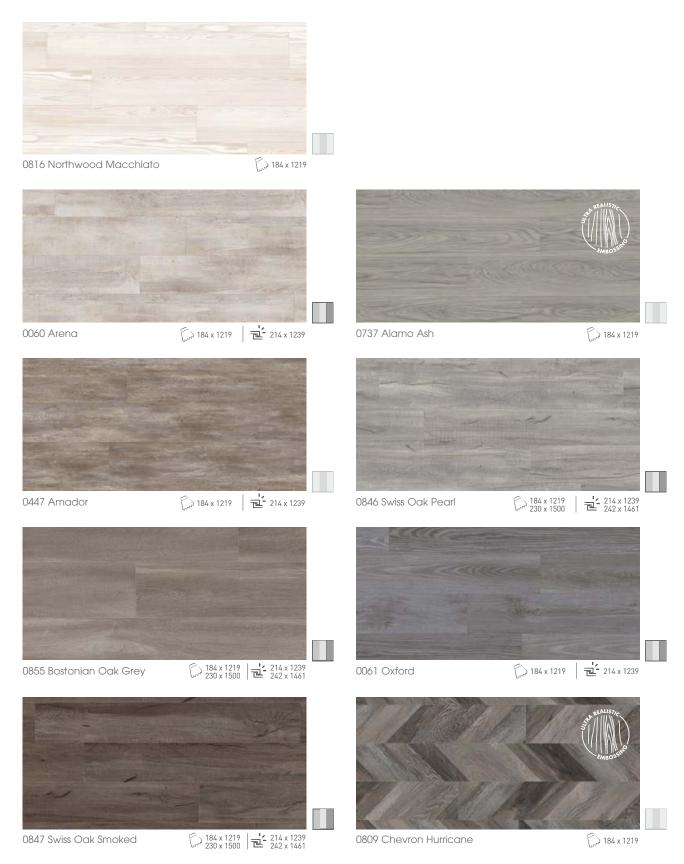


Medium



High

CREATION 30 / CREATION 30 CLIC



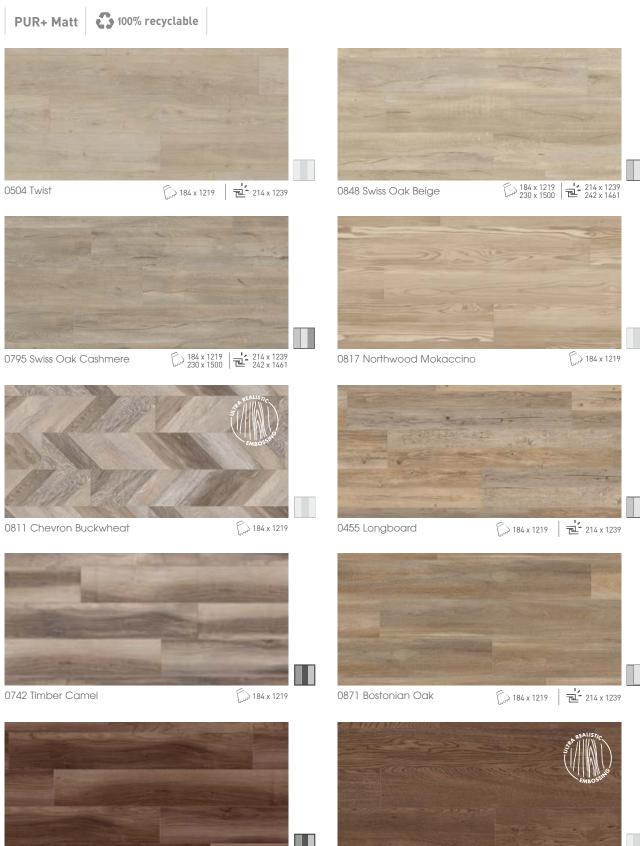

(184 x 1219

0740 Royal Oak Coffee


(184 x 1219

0741 Timber Rust







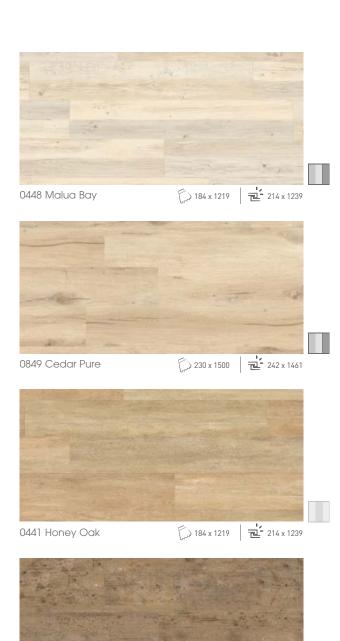


0579 Amarante

(m) 184 x 1219 214 x 1239

CREATION 30 / CREATION 30 CLIC

PUR+ Matt 100% recyclable

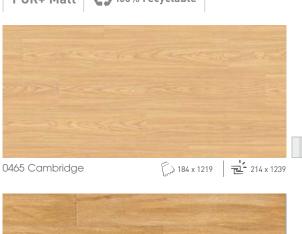












230 x 1500 242 x 1461 0850 Cedar Brown









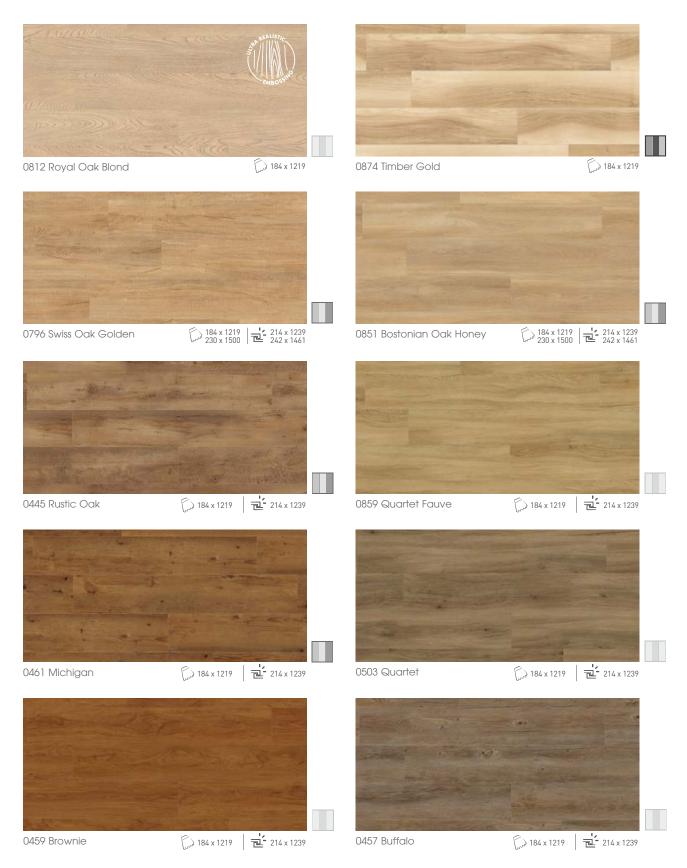






CREATION 30 / CREATION 30 CLIC









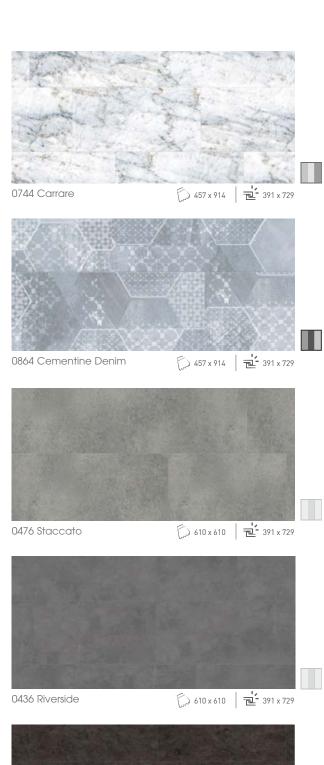

Light

0860 Norvegian Stone

€ 457 x 914 391 x 729

CROSS REFERENCES

			0	0	10.00
		COLUMN TO SERVICE	т 7	ო 7	SZZS
	900-20	STATE OF THE PARTY	ō	ō	号量を
	8040	PERMANE.		Ē	
		(0)44/552	CREA	<u> </u>	₽₹₩
THE PERSON NAMED IN			5	55	がるの
The second second				1,	
中的 法统治国际出版的	CODE	EMBOSS	/ 74		
The second second second	STORY OF	ALC: UNKNOWN		Children.	
AMADOR	0447	SAW EFFECT			S004
AMARANTE	0579	BRUSHED		-	S005
ARENA	0060	SAW EFFECT			S026
ASPEN	0458	BRUSHED NATURAL			S006
BALLERINA	0347	NATURAL		-:-	S008
BOSTONIAN OAK PEIGE	0871	NATURAL			S016
BOSTONIAN OAK BEIGE	0853	NATURAL		-:-	S017
BOSTONIAN OAK GREY	0855	NATURAL			S018
BOSTONIAN OAK HONEY	0851	NATURAL			S019
BROWNIE BUFFALO	0459 0457	BRUSHED			S073 S075
		NATURAL			
CARMEL	0465	HAMMERED			S065
CARMEL	0618	STONE		-:-	S020
CARRARE CEDAR BROWN	0744	NATURAL		-	S021 S024
CEDAR BROWN CEDAR PURE	0850 0849	NATURAL			S024 S025
CEMENTINE BUCKSKIN	0849	STONE			S025 S023
CEMENTINE DENIM	0864	STONE			S023
DURANGO TAUPE	0751	HAMMERED		-	S027
HONEY OAK	0/31	NATURAL			S033
LONG BOARD	0455	BRUSHED			S034
MALUA BAY	0448	BRUSHED			S035
MICHIGAN	0461	BRUSHED			S038
NORVEGIAN STONE	0860	HAMMERED			S042
OXFORD	0061	BRUSHED			S043
PARKER STATION	0374	HAMMERED	_	-	S047
QUARTET	0503	NATURAL			S056
QUARTET FAUVE	0859	NATURAL		-	S057
RANCH	0456	BRUSHED			S053
REGGIA IVORY	0861	STONE	-		S054
RIVERSIDE	0436	HAMMERED			S032
RUSTIC OAK	0445	BRUSHED			S062
SILVER CITY	0373	HAMMERED			S048
STACCATO	0476	PERFORATED	-	-	S064
SWISS OAK BEIGE	0848	NATURAL			S011
SWISS OAK CASHMERE	0795	NATURAL		-	S012
SWISS OAK GOLDEN	0796	NATURAL			S015
SWISS OAK PEARL	0846	NATURAL	-	•	S014
SWISS OAK SMOKED	0847	NATURAL			S013
TWIST	0504	NATURAL	-	-	S039
WHITE LIME	0584	SAW EFFECT		-	S074
ALAMO ASH	0737	ALAMO	_		S002
ALAMO SAND	0738	ALAMO	-		S003
BACK STREET	0748	HAMMERED	-		S007
CHEVRON BUCKWHEAT	0811	CHEVRON	-		S029
CHEVRON HURRICANE	0809	CHEVRON			S030
NORTHWOOD MACCHIATO	0816	BRUSHED			S040
NORTHWOOD MOKACCINO	0817	BRUSHED			S041
PASHMINA CLOUD	0747	STONE			S049
PASHMINA STORM	0746	STONE			S050
QUARTET HONEY REGGIA TAUPE	0870 0862	STONE			S058 S055
ROYAL OAK BLOND	0862	ROYAL OAK	-		S060
ROYAL OAK COFFEE	0740	ROYAL OAK			S060 S061
ROYAL OAK GOLD	0740	ROYAL OAK			S059
TIMBER CAMEL	0742	BRUSHED			S066
TIMBER GOLD	0874	BRUSHED			S067
TIMBER RUST	0741	BRUSHED			S068


PACKAGING

Product size (mm)	m² / box	m²/ pallet
CREATION 30		
184 x 1219	3.36	241.92
184 x 1219*	3.14	251.2
230 x 1500	3.80	250.8
610 x 610	3.35	234.5
457 x 914	3.76	248.16
CREATION 30 CLIC		75.75
214 x 1239	2.12	114.5
242 x 1461	2.47	118.6
391 x 729	2.28	116.3

* CHEVRON design only

Creation

EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS

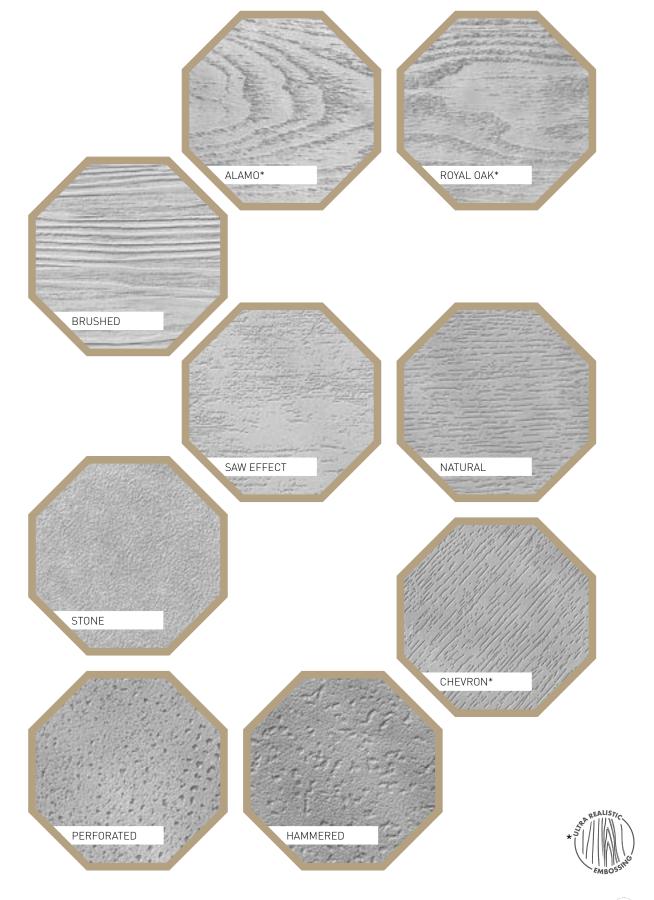

RIGID 30 LOCK

RIGID 30 LOCK



PUR+ MATT



4D DESIGN



Natural look



High definition design & color

STRUCTURED **EMBOSS & BEVEL**



Ultra realistic surface

XL FORMAT

Wide variety of tiles & planks

FULL RIGID TECHNOLOGY






Renovation ceramic 6 mm joint

LOCK SYSTEM



Please refer to Gerflor's installation guidelines

DESIGN SKIRTINGS




Vinyl design skirting Ref. 6086 + colour code

Design skirting caps Ref. 6087 (see page 288 for further details)

- 60 mm high Suitable for areas up to 80 sqm 2 lm

- Packaging: 6 skirtings per box (12 lm)
 100% watertight suitable for dry AND wet areas
 All designs available + paintable white



MDF design skirting Ref. 5947 + colour code

- 60 mm high / 16 mm thick Suitable for areas as from 80 sqm

.....

- Packaging: 5 skirtings per box (11 lm)
 Can be clipped (Gerflor clip: 5948), adhesived
- or nailed
 All designs available + paintable white

More details on gerflor.com

RIGID 30 LOCK









RIGID 30 LOCK is a synthetic, decorative, rigid, antistatic floorcovering, available in tiles and planks, with bevelled edges. It consists in a 0.30 mm thick transparent wear layer, a design film, a rigid core board technology. The overall thickness is 4 mm.

They benefit from a cross-linked polyurethane surface treatment (PUR+ MATT), making maintenance easier and eliminating the need for initial polishes.

RIGID 30 LOCK is a looselay floorcovering (up to 150 squared meters) assembled with a interlocking system, resistant to use (commercial/industrial use) of 23-31 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

RIGID 30 LOCK is phthalate free, except recycled content. It is 100% recyclable. It is 100% compliant with REACH. The product emission rate of organic compounds is < 100 microgram/m³ (TVOC < 28 days - ISO 16000-6).

				RIGID 30 LOCK	
DESCRIPTION					
Total thickness	EN ISO 24346	mm	4.00		
Thickness of wearlayer	EN ISO 24340	mm		0.30	
Weight	EN ISO 23997	g/sqm		7890	
Size	EN ISO 24342	mm	178 x 1219 228 x 1492 457 x		
Number of planks /tiles and sqm per box	-	-	7 / 1.52	5 / 1.70	5 / 2.09
CLASSIFICATION					
Norm / Product specification	-	-		EN ISO 10582	
European classification	EN ISO 10874	class		23-31	
Fire rating	EN 13501-1	class		B _{fl} -s1	
Static electrical propensity	EN 1815	kV		< 2	
Slip resistance wet	DIN 51 130	class	R10		
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 2.0		
Wear group	-	group	Т		
Type Binder content	EN ISO 10582	type	I		
Room impact	NF S 31074	dB	80		
Impact sound insulation	EN ISO 717-2	dB	4		
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value)	-	%	≤ 0.08		
Residual indentation	EN ISO 24343-1	mm	≤ 0.10		
Castor chair test (type H)	ISO 4918	-		OK	
Thermal conductivity	EN ISO 10456	W/(m.k)		0.25	
Colour fastness	EN 20 105 - B02	degree		≥ 6	
Surface treatment	-	-		PUR+ Matt	
Chemical products resistance	EN ISO 26987	-		OK	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³	< 100		
CE MARKING					
CE	EN 14041		67		
				B _{ff} -s1	

RIGID 30 LOCK



RIGID 30 LOCK















PUR+ Matt 100% recyclable











228 x 1492 mm 0019 Kilda Pearl



457 x 914 mm 0011 Trondheim



0010 Cartago

178 x 1219 mm



0009 Viajo Grey

178 x 1219 mm



0977 Suave Grey

178 x 1219 mm

CROSS REFERENCES / **RIGID 30 LOCK & CREATION**

CODE	RIGID	CREATION
0010	Cartago	Amador
0007	Quito	Arena / Denim Wood
0002	Hobart	Ballerina
0003	Viajo	Bostonian Oak
0009	Viajo Grey	Bostonian Grey
0013	Bello	Carmel / Dock Taupe
0016	Puno Brown	Cedar Brown
0017	Puno Pure	Cedar Pure
0011	Trondheim	Norvegian Stone / Welsh Slate
0001	Puerto	Quartet
8000	Lovina	Ranch
0015	Kilda Golden	Swiss Oak Golden
0019	Kilda Pearl	Swiss Oak Pearl
0004	Sucre	Twist / Midwest
0977	Suave Grey	Oxford
0979	Crunchy	Buffalo









TOPSILENCE DESIGN





PUR+ MATT







Natural look



High definition design & color

STRUCTURED **EMBOSS & BEVEL**



COLLECTION

Wide variety of tiles & planks

HYBRID TECHNOLOGY



Soft underfoot





Renovation ceramic < 6 mm joint

NATURAL INSULATION

ACOUSTIC BACKING




LOCK SYSTEM



Please refer to Gerflor's installation guidelines

DESIGN SKIRTINGS.....





MDF design skirting - Ref. 5947 + colour code

- 60 mm high / 16 mm thick
- 2.2 lm
- Packaging: 5 skirtings per box (11 lm)
 Can be clipped (Gerflor clip: 5948), adhesived or nailed
- All designs available + paintable white

TOPSILENCE DESIGN





220v1225 mm

200v420 mm

PUR+ Matt



TOPSILENCE DESIGN is a decorative floorcovering solution based on a Vinyl and HDF construction, available in tiles and planks, with bevelled edges. It consists of a wear layer, a design film, a PVC layer for a better walking comfort, a 6.8 mm HDF board for the stability and 1.2 mm Cork underlay allowing acoustic insulation up to 16 dB. The overall thickness is 9.5 mm. It benefits from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

TOPSILENCE DESIGN is an interlocking floorcovering assembled with an interlocking system, resistant to use (residential / commercial use) of 23-32 according to EN-ISO 16511 and has $B_{\rm fl}$ -s1 class for smoke emission according to EN 13501-1.

TOPSILENCE DESIGN is phthalate free, except recycled content. It is REACH compliant. The product emission rate of organic compounds is < 100 microgram/m³ (TVOC < 28 days – ISO 16000-6).

			TOPSILENCE DESIGN
DESCRIPTION			
Total thickness	EN ISO 24346	mm	9.5
Weight	EN ISO 23997	g/sqm	9880
Plank size	EN ISO 24342	mm	229 x 1235
Tile size	EN ISO 24342	mm	298 x 620
CLASSIFICATION			
Norm / Product specification	-	-	EN 16511
European classification	EN ISO 10874	class	32
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10
PERFORMANCES			
Impact sound insulation	EN ISO 717-2	dB	16
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	0K
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987	-	0K
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 100
CE MARKING			
C€	EN 14041		
			B _n -s1

TOPSILENCE DESIGN









0007 Carvalho

229 x 1235 mm



0005 Sintra

229 x 1235 mm



0009 Arda Golden

229 x 1235 mm



0006 Ruivo Brown

229 x 1235 mm



0015 Braga

229 x 1235 mm

TOPSILENCE DESIGN













0011 Tavira Clear

229 x 1235 mm



0004 Peniche

229 x 1235 mm



0008 Estrela

229 x 1235 mm



0010 Arda Pearl

229 x 1235 mm



0003 Douro

229 x 1235 mm



0014 Montego Grey

229x 1235 mm



0002 Minho 298 x 620 mm

0001 Negra 298 x 620 mm

CROSS REFERENCES / TOPSILENCE DESIGN & CREATION 30

TOPSILENCE DESIGN	CREATION 30 GLUE DOWN / CLIC
Ruivo Brown 0006	Cedar Brown 0850
Sintra 0005	Ballerina 0347
Arda Golden 0009	Swiss Oak Golden 0796
Braga 0015	Buffalo 0457
Tavira Clear 0011	Twist 0504
Carvalho 0007	Malua Bay 0448
Peniche 0004	Arena 0060

TOPSILENCE DESIGN	CREATION 30 GLUE DOWN / CLIC
Arda Pearl 0010	Swiss Oak Pearl 0846
Estrela 0008	Ranch 0456
Douro 0003	Amador 0447
Montego Grey 0014	Oxford 0061
Negra 0001	Norvegian Stone 0860
Minho 0002	Carmel 0618








MORE THAN A FLOOR... WALL & FINISHES



PROFILES



RAMP 5-6MM (aluminium) Ref. 0505



FLAT THRESHOLD* (aluminium) Ref. 2570

Suitable with Creation Clic and Looselay

DESIGN SKIRTINGS



(Vinyl)




Ref. 6086 + Color code Ref. 5947 + Color code (MDF)

+ END CAPS

Ref. 6087 (1 color anthracite grey)

White to paint or matching design pages 123, 144, 164

COVERING SKIRTING



Ref. 2550* (MDF)



TOOLS



ADD-ON UNDERLAYERS



FOR MORE DETAILS

visit gerflor.com > Services > Virtual Library



SPECIAL LVT FINISHING BROCHURE AVAILABLE

MATTING



QUICKMAT TILES
Ref. 1725 + 1726 + 1727



LOOSELAY ROMAT GT INSERT KIT Ref. 1719



KIT ESPLANADE 9000 Ref. 1700


COMPLETE RANGE OF ACCESSORIES page 282-313






GTI	180-187
• GTI MAX	180-183
• GTI EL5	184-187
Attraction®	188-191

TECHNICAL TILES

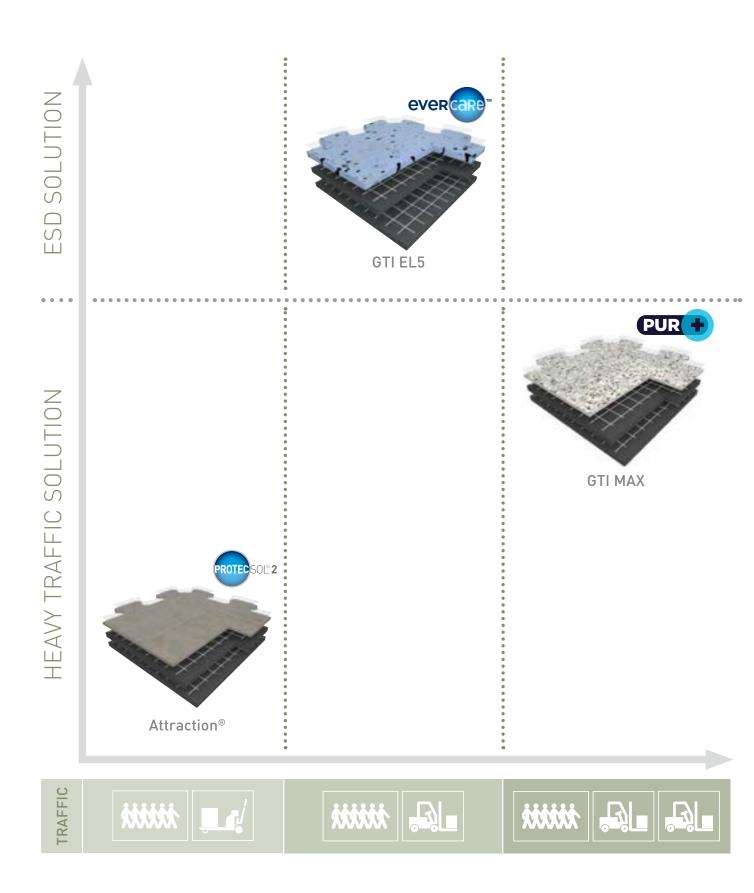

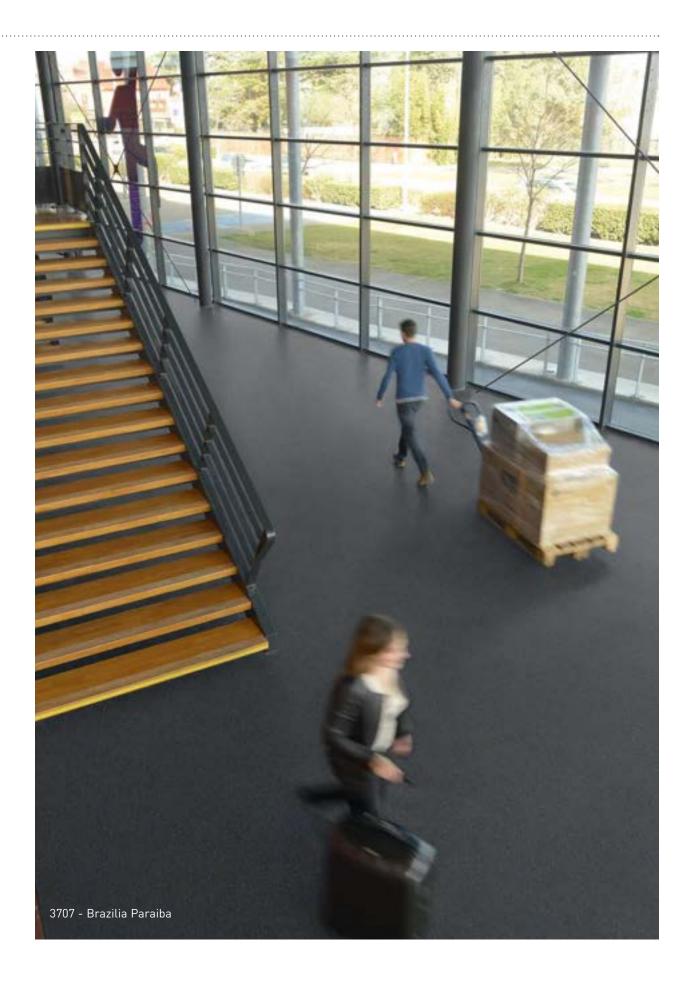


GTI MAX








GTI CONNECT

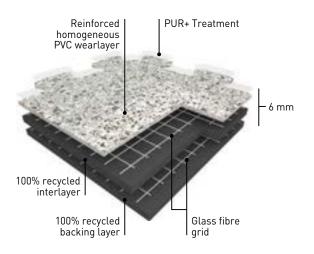

GTI CLEANTECH

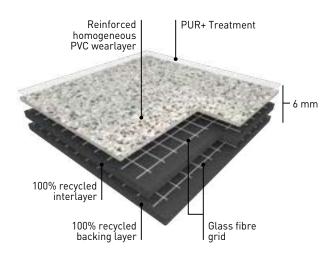

GTI MAX is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (**PUR+**), 6 mm thick with a dovetail joint for the **CONNECT** configuration and with welded joints for the **CLEANTECH** configuration.

GTI is manufactured by Gerflor using a continuous high pressure process, abrasion group T. The **GTI MAX** wearlayer is reinforced by specific oblong fillers that offers an outstanding resistance to traffic.

GTI MAX is reinforced with 2 glass fibre grids on either side of an intermediate pressed homogeneous layer.

GTI MAX backing is a 4 mm thick black pressed homogeneous sheet, its surface is a coloured and reinforced homogeneous sheet 2 mm thick. The product is 100% recyclable.

GTI MAX is made with a phthalate free plasticizer.

GTI Access are ramps that provide continuity between the tile and the existing floor.

GTI Corner enable covering of inaccessible corners or finishing central patterns.

GTI LOGOS













0005 No entry

0004 Stop

0001 Caution

0002 Forkliff

0006 Pedestrian

0003 Arrov

GTI MAX









- ► Resistant to heavy traffic
- ► Fast renovation: can be installed over existing floorcovering
- ▶ No subfloor preparation, no adhesive and no production stop (no loss of money)
- ▶ Polyurethane surface treatment PUR+ for ease of maintenance
- ▶ 6 Standard logos: Mix and match colours to create corners and walkways

	TEST METHOD			GTI M	1AX
DESCRIPTION					
Total thickness	-	EN ISO 24346	mm	6	
Wearlayer thickness	-	EN ISO 24340	mm	2	
Weight	-	EN ISO 23997	g/m²	936	5
Size	-	EN ISO 24342	mm	635 x 635 GTI 600 x 600 GTI CLEANTE	
CLASSIFICATION					
Norm / Product specification	-	-	-	EN ISO	10582
European classification	-	EN ISO 10874	class	34-4	43
Fire rating	-	EN 13501-1	class	Bfl-s	51
Static electrical propensity	EN 1815	EN 14041	kV	< 2	
Slip resistance wet: ramp test with oil	DIN 51 130	-	class	R10	
Pendulum test	-	BS7976	-	Concrete emboss ⁽²⁾ : PTV+ 36 compliant	Rice emboss ^[2] : NO
PERFORMANCES					
Wear resistance	-	EN 660.2	mm³	€ 2.	0
Wear group	-	-	group	T	
Type Binder content	-	EN ISO 10582	type	1	
Dimensional stability	-	EN ISO 23999	%	≤ 0.′	15
Residual indentation	-	EN ISO 24343-1	mm	≤ 0.′	10
Castor chair test (type W)	-	ISO 4918	-	OK	,
Shore Hardness	-	EN ISO 868	H₀	> 5	5
Shifting resistance	-	CAHIER CSTB 3562	N/mm²	> 3	0
Thermal conductivity	-	EN ISO 10456	W/(m.k)	0.2	5
Colour fastness	-	EN 20 105 - B02	degree	≥ 6	
Surface treatment	-	-	-	PUF	₹+
Chemical products resistance	-	EN ISO 26987	-	OK	
ENVIRONMENT / INDOOR A	IR QUALIT	Υ			
TVOC after 28 days	-	ISO 16000-6	microgram/m³	< 10	0
Certification	-	-	-	Floors	core®
CE MARKING					
CE		EN 14041			
•		LIN 14041		© Signary	

(1) Available upon request (2) See pages 182-183


TECHNICAL TILES

GTI MAX - Rice Emboss







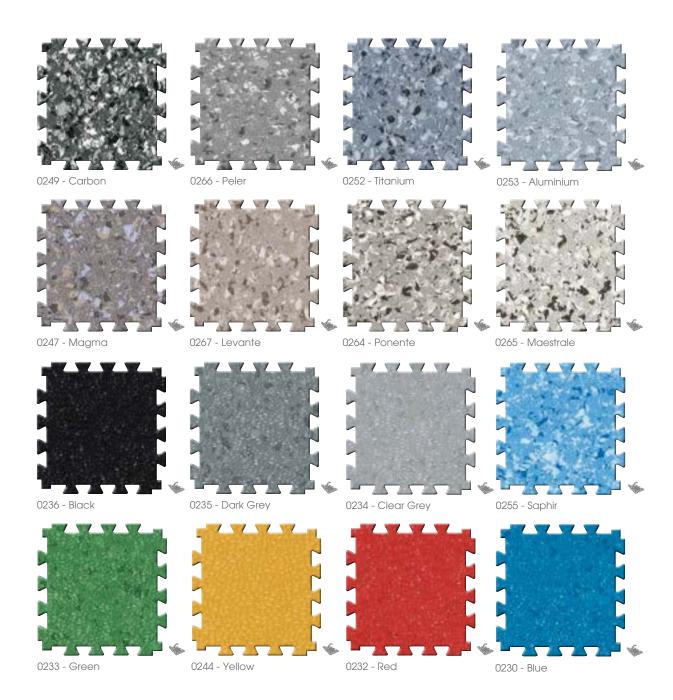

15 interlocking edges per side لحتيات

All these colours are available in GTI MAX CLEANTECH.
For more details please contact your Gerflor
representative.


GTI MAX - Concrete Emboss






Removable



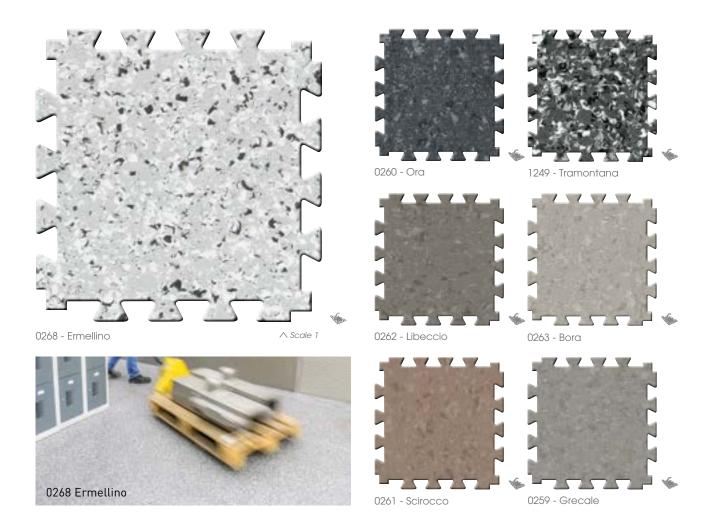

ACCESSORIES GTI MAX

ALUMINIUM RAMP 5-6 MM




Ref. 0505

See page 294

Aluminium Ramp 5-6 mm / + Aluminium Corner 5-6 mm / Ref. 1513

HIGH TRAFIC PVC RAMP 6 MM



Ref. 0500 See page 293

KIT ESPLANADE



Ref. 1700 See page 297

CORNER & ACCESS







For more information, please refer to our GTI MAX brochure.

GTI EL5


•

GTI EL5 CONNECT & CLEANTECH






GTI EL5 CONNECT

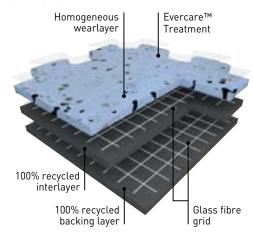

GTI EL5 CLEANTECH



GTI EL5 CONNECT is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.

GTI EL5 CONNECT tiles can be installed using interlocking system with dove

GTI EL5 CLEANTECH is a multi-layered looselay vinyl tile, 6 mm thick, reinforced with 2 glass fibre grids.

GTI EL5 CLEANTECH is available in **square format with welded joints** for clean environments and watertight systems requirements.

GTI EL5 wearlayer is 2 mm vinyl homogeneous manufactured with continuous high pressure process, abrasion group P.

It offers an outstanding resistance to traffic.

This floorcovering is treated with **Evercare™** technology: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ offers **easy maintenance and resistance against staining** of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel; **and decontamination protocols.**

This treatment has excellent maintenance characteristics; it requires no wax for life!

The carbon encapsulated granules throughout its full thickness and the **conductive backing** and **conductive surface treatment** ensure optimal and consistent conductive properties throughout its full life expectancy.

• 5 x 10⁴ ≤ Rt ≤ 10⁶ according to EN 1081

It has permanent antistatic properties.

• < 2000 V according to EN 1815

The product is non-emissive of volatile organic compounds with < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).

COMPLEMENTARY FINISHES					
	GTI EL5 CONNECT GTI EL5 CLEANTEC				
		2715	Access		
2717	Access	2716	Corner		
		2722	Conductive Welding Rods		
		2719	Coving		
2718	Corner	2720	Coving Corner In		
		2721	Coving Corner Out		



GTI EL5





Removable



CONNECT

- ► Fast Installation
- ▶ Resistance to heavy traffic

CLEANTECH

- ► Watertight System (hot welding)
- ▶ Resistance to heavy traffic

			GTI EL5
DESCRIPTION			
Total thickness	EN ISO 24346	mm	6
Wearlayer thickness	EN ISO 24340	mm	2
Weight	EN ISO 23997	g/m²	9240
Size	EN ISO 24342	mm	635 x 635 (GTI EL5 CONNECT) 650 x 650 (GTI EL5 CLEANTECH)
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	B _{fl} -s1
Electrical resistance ⁽¹⁾	EN 1081	W	Rg 10 ⁶
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 4.0
Wear group	NF 189	group	Р
Type Binder content	EN ISO 10582	type	1
Dimensional stability	EN ISO 23999	%	≤ 0.25
Castor chair test (type W)	ISO 4918	-	ок
Shore Hardness	EN ISO 868	H₀	≥ 90
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Evercare™
Chemical products resistance	EN ISO 26987	-	ок
ENVIRONMENT / INDOOR AIR QU	ALITY		
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14	041	DS DS STORES

(1) Measured before installation

TECHNICAL TILES


GTI EL5



GTI EL5

GTI EL5 CONNECT | Compate | R9 | Evercare™ | Removable | | 0353 Seige | 0350 Light Grey | | 0352 Grey | 0351 Black | 0354 Blue | ∧ Scale 1



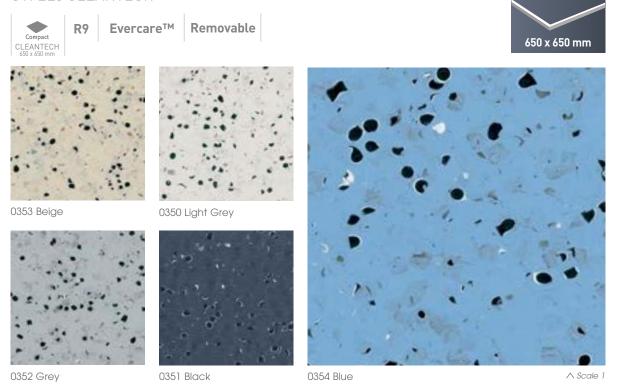

ATTRACTION®




ATTRACTION® CONNECT & CLEANTECH






ATTRACTION® CONNECT

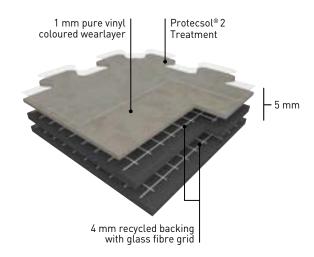

ATTRACTION® CLEANTECH

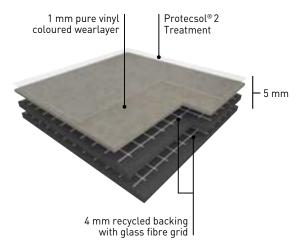

ATTRACTION® is a semi-flexible tile constructed by compacting, at high temperature and over 3000 T, a 4 mm recycled backing and a 1 mm pure vinyl wear layer. This wear layer is incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer. The product comprises a compact backing which is pressed and reinforced with two glass fibre grids.

 $\mbox{ATTRACTION}^{\otimes}$ has a unique dovetail joint which allows fast loose lay installation and replacement.

ATTRACTION® is treated with **Protecsol® 2**, a surface treatment obtained by UV laser crosslinking.

This **Protecsol® 2** ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.


It has a Bfl-s1 fire classification in accordance with standard EN 13501-1. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6).

It is made with a phthalate free plasticizer.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

It is 100% recyclable and made with up to 80% recycled content.

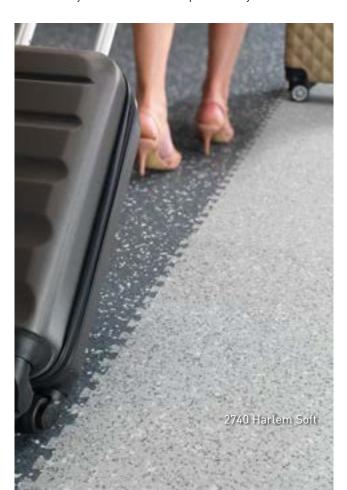

ATTRACTION®







The Taralay Premium range in the looselay Attraction® format for an easy and longlasting renovation!

- ► Fast track and easy installation
- ▶ No immobilisation of the premises and no loss of turnover
- ▶ Little or no subfloor preparation
- ► Low maintenance cost: UV cured polyurethane Protecsol® 2 treatment.

			ATTRACTION®
DESCRIPTION			
Total thickness	EN ISO 24346	mm	5.00
Wearlayer thickness	EN ISO 24340	mm	1.00
Weight	EN ISO 23997	g/m²	7460
Size	EN ISO 24342	mm	635 x 635 CONNECT 600 x 600 CLEANTECH (without dovetail) [1]
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815 IEC 61340-4-5	kV V	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm^3	≤ 2.0
Wear group	-	group	T
Type Binder content	EN ISO 10582	type	1
Dimensional stability	EN ISO 23999	%	≤ 0.25
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type W)	ISO 4918	-	ОК
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol® 2
Chemical products resistance	EN ISO 26987	-	ОК
ENVIRONMENT / INDOOR AIR QU	JALITY		
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE MARKING			
(6	EN 1404	1	
	LN 1404	1	B _{II} -s1

(1) Available upon request

TECHNICAL TILES

ATTRACTION®



All these colours are available in ATTRACTION $^\circ$ CLEANTECH. For more details please contact your Gerflor representative.

ATTRACTION® - NEOPOLIS






Removable

∧ Scale 1




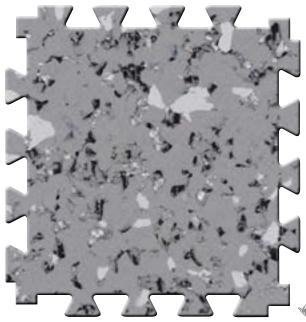

2740 Harlem Soft (Neopolis)




2742 Times Square (Neopolis)



2741 Brooklyn (Neopolis)



2743 Central Park (Neopolis)




2744 Queens Soft (Neopolis)



2745 Plaza (Neopolis)

ACCESSORIES ATTRACTION®

ALUMINIUM RAMP 5-6 MM




Aluminium Ramp 5-6 mm / Ref. 0609 + ALUMINIUM CORNER 5-6 mm / Ref. 0629 See page 294

KIT ROMAT GT FOR ATTRACTION®



Ref. 1719 See page 297

CORNER & ACCESS

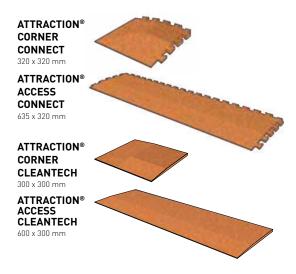

For more information, please refer to our Attraction® brochure.






EL5 / EL7 solutions Dissipative & conductive floors	. 196-199
Dissipative floors	
• Mipolam EL7	198
Mipolam Robust EL7	198
Conductive floors	
• Mipolam EL5	199
Mipolam Technic EL5	199
• GTI EL5 (See page 184)	
Safety floorings	.200-20
• Tarasafe Geo SparClean®	203
• Tarasafe Ultra & Ultra Comfort SparClean®	204
• Tarasafe Standard/Plus/Super	20
• Tarasafe Ultra H ₂ O (See page 209)	
Shower System	206-21
• Elegance SD	208
• Tarasafe Ultra H ₂ O	209
Mural Calypso	210
Wallcoverings	.212-21
Mural Ultra	214
Mural Club	218
Mural Calypso (See page 210)	

Dissipative Floors

EL5/EL7 SOLUTIONS

EN 1081 (Ω): $10^6 \le Rt \le 10^8$






Mipolam EL7


Mipolam Robust EL7

FLOORINGS

SparClean® Treatment



Tarasafe Geo / Tarasafe Ultra




Tarasafe Ultra Comfort

SYSTEM

Floorcoverings




Elegance SD



Tarasafe Ultra H₂0

WALLCOVERINGS



Mural Calypso



Mural Club

Conductive Floors

EN 1081 (Ω): $10^4 \le Rt \le 10^6$




Mipolam EL5

EN 1081 (Ω): $10^4 \le Rt \le 10^6$




Mipolam Technic EL5

EN 1081 (Ω): $5 \times 10^4 \le Rt \le 10^6$




GTI EL5


PUR Treatment



Tarasafe Standard



Tarasafe Super




Tarasafe Plus

Wallcoverings



Mural Calypso




Mural Ultra

EL5 / EL7 SOLUTIONS

Dissipative floors

MIPOLAM EL7 - MIPOLAM ROBUST EL7

MIPOLAM EL7

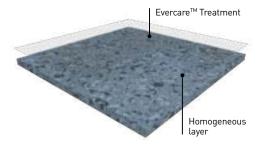






MIPOLAM EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile form, calendered and compacted and comes in 10 colours. This floorcovering is treated with **EVERCARETM**: the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids stain of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. According to ISO 21702, MIPOLAM EL7 has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, MIPOLAM EL7 has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. This treatment has excellent maintenance characteristics; it requires no wax for life! MIPOLAM EL7 acts as a continuous dissipater $10^6 \le Rt \le 10^8$. The product has to be grounded with an ESD copper strip (see finishes) to meet its full performance. The product is non-reactive to residual indentation with a value ≤ 0.02 mm. The flooring has a binder content type II, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with <10 microgram/m³ (TVOC after 28 days ISO 16000-6).

MIPOLAM ROBUST EL7









10⁶ \leq Rt \leq 10⁸ Ω 100% recyclable

MIPOLAM ROBUST EL7 is a dissipative flexible homogeneous vinyl floorcovering available in both sheet and tile. Calendered and compacted. It acts as a continuous dissipater 106 ≤ Rt ≤ 108 (EN 1081).


Conductive floors



MIPOLAM EL5 - MIPOLAM TECHNIC EL5.....




MIPOLAM EL5

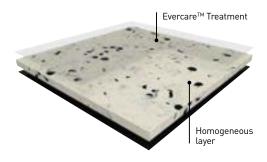



MIPOLAM EL5 is a conductive flexible homogeneous vinyl floorcovering available in sheet. The 2 mm homogeneous material incorporates carbon encapsulated granules throughout its full thickness. It has a conductive backing to ensure optimal and consistent conductive properties throughout its full life expectancy. This floorcovering is treated with **Evercare™**: the latest improvements in polyurethane surface treatment obtained by UV laser crosslinking. Evercare™ avoids stain of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring. According to ISO 21702, MIPOLAM EL5 has anti-viral activity against Human Coronaviruses: it reduces the number of virus by 99.7% after 2h. According to ISO 22196, MIPOLAM EL5 has antibacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. This treatment has excellent maintenance characteristics; it requires no wax for life! MIPOLAM EL5 acts as a continuous conductive 10⁴ ≤ Rt ≤ 10⁶. The product has to be grounded with an ESD copper strip (see finishes) to meet its full performance. The product is non-reactive to residual indentation with a value ≤ 0.02 mm (EN ISO 24343-1) The flooring complies with the EN ISO 10874 (34-43) offering a binder content type II, is suitable for heavy duty traffic areas and has a Bfl-s1 fire resistance. The product is non-emissive of volatile organic compounds with < 10 microgram/m³ (TVOC after 28 days ISO 16000-6).

MIPOLAM TECHNIC EL5

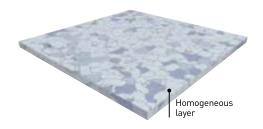





MIPOLAM TECHNIC EL5 is a conductive flexible homogeneous compacted vinyl floorcovering available in tiles

The conductive carbon coated PVC pellets create a perfect conductive network for permanent conductive and antistatic properties throughout its full life expectancy. It acts as a continuous conductive $10^4 \le \text{Rt} \le 10^6$ (EN 1081).

EL5 / EL7 SOLUTIONS







A complete range for Hi-tech applications: electronics and telecommunication areas, computer rooms, operating theatres, radiology...

- ▶ Compacted floorcovering for better hygiene, maintenance, and traffic resistance.
- ▶ Available in tiles and sheets with specific formats especially adapted to raised floors (608 x 608 mm).

			MIDOLAM	MIDOLAM	MIDOLAM	MIDOLAM
			MIPOLAM EL7	MIPOLAM ROBUST EL7	MIPOLAM EL5	MIPOLAM TECHNIC EL5
DESCRIPTION						
Total thickness	EN ISO 24346	mm	2	2	2	2
Weight	EN ISO 23997	g/sqm	3100	3300	2985	3800
Width of sheet	EN ISO 24341	cm	200	200	200	-
Length of sheet	EN ISO 24341	lm	20	20	20	-
Tile size	EN ISO 24342	mm	608 x 608	608 x 608	-	608 x 608
Number of tiles per package	-	-	20	20	-	20
CLASSIFICATION						
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43
Fire rating	EN 13501-1	class	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1
Electrical resistance ^[1]	EN 1081	Ohm	10 ⁶ ≤ Rt ≤ 10 ⁸	10 ⁶ ≤ Rt ≤ 10 ⁸	10 ⁴ ≤ Rt ≤ 10 ⁶	10 ⁴ ≤ Rt ≤ 10 ⁶
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51 130	class	R9	-	R9	-
PERFORMANCES						
Type Binder content	EN ISO 10581	type	II	II	I	II
Dimensional stability	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	≤ 0.40	≃ 0.25
Residual indentation (norm)	EN ISO 24343-1		≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Residual indentation (average measured value)	EN ISO 24343-1	mm	≃ 0.02	≃ 0.03	≃ 0.02	≃ 0.03
Castor chair test (type W)	ISO 4918	-	0K	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	-	Evercare™	-
Chemical products resistance ^[2]	EN ISO 26987	-	OK	0K	0K	OK
Anti-bacterial activity (E.coli – S. aureus – MRSA) after 24h ^[3]	ISO 22196	-	> 99% inhibits growth	-	> 99% inhibits growth	-
Anti-viral activity (human coronavirus) after 2h ⁽³⁾	ISO 21702	-	> 99.7% virucidal activity	-	> 99.7% virucidal activity	-
ENVIRONMENT / INDOOR AIR QU	JALITY					
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10	< 10	< 10
Certification	-	-	Floorscore®	-	Floorscore®	-
CE MARKING						
(f	EN 140	741			B _{fi-S1}	
	LIN 140	J4 I	° <u>/</u> / ≤108Ω	° <u>/</u> <u>/</u> ≤108Ω	<106Ω	<106Ω



⁽²⁾ Staining table available upon request.

⁽³⁾ The implementation of an effective cleaning method is the best defence against infection

EL7 SOLUTIONS: MIPOLAM EL7 & ROBUST EL7











4120 Silver Grey





4159 Grey Storm







4116 Sapphire

4110 Violet Grev



4111 Raffia



4124 Smoked Opal



 \bigcirc Compact \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc 100% recyclable



4144 Havana Brown

4132 Citrine

MIPOLAM ROBUST EL7



0003 Ivory



0005 Steel

∧ Scale 1





0013 Pewter





0112 Storm



0002 Platinum



0306 Green

EL5 SOLUTIONS: MIPOLAM EL5 / TECHNIC EL5 / GTI EL5

MIPOLAM EL5




















0355 Green 0

MIPOLAM TECHNIC EL5
























GTI EL5

More information on GTI EL5 tile, refer to pages 184-187





Removable


R9

Evercare™



SAFFTY FLOORINGS - TARASAFF

TARASAFE GEO: SPARCLEAN® TREATED

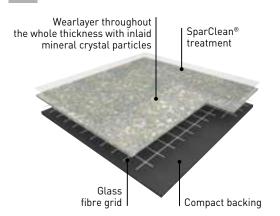

TARASAFE GEO is a slip resistant vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral crystal particles (patented) and coloured chips for a decorative design. It is reinforced with a glass fibre grid in


It is an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. TARASAFE GEO is suitable for most contract & commercial areas. It is eco-friendly, 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days - ISO 16000 -6).

The SparClean® surface treatment improves the product performance in terms of stain and dirt resistance and designs last longer for extended

According to ISO 22196, TARASAFE GEO has anti-bacterial activity against MRSA of 99% after 24h.

TARASAFE ULTRA / ULTRA COMFORT: SPARCLEAN® TREATED......

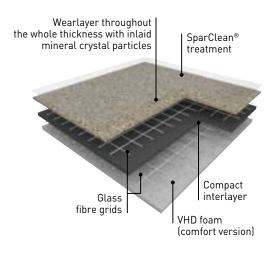

TARASAFE ULTRA & ULTRA COMFORT are slip resistant safety vinyl floorcoverings, with a PVC wear layer and deeply inlaid mineral crystal particles (patented) and coloured chips for a decorative design. They are reinforced with a glass fibre grid and are available in a sheet format.

The ranges are ideal for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required. Suitable for most contract & commercial areas, they are a popular choice in the education and healthcare environments, the matt finish surface is also perfectly suitable for dementia care units.

They are eco-friendly, 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2. They are also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days - ISO 16000 -6).

The **SparClean®** surface treatment improves the product performance in terms of stain and dirt resistance and designs last longer for extended

According to ISO 22196, TARASAFE ULTRA has anti-bacterial activity against MRSA of 99% after 24h.


TARASAFE ULTRA COMFORT has a VHD closed cell foam backing yielding a 16 dB sound insulation.

TARASAFE ULTRA H20......See page 209

TARASAFE

•

TARASAFE STANDARD: PUR TREATED.....

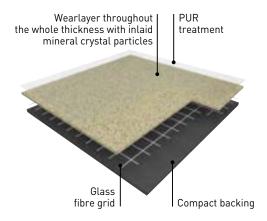

TARASAFE STANDARD with **PUR** surface treatment is a slip resistant safety vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral crystal particles (patented). It is reinforced by a glass fibre grid and available in a sheet format. It is an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required.

TARASAFE STANDARD is suitable for most contract & commercial areas. It is eco-friendly, 100% recyclable, Floorscore® certified and does not contain any heavy metals or CMR 1&2, it is also 100% compliant with REACH.

The product emission rate of volatile organic compounds is $< 100 \text{ microgram/m}^3 \text{ (TVOC after 28 days - ISO 16000 -6)}.$


The **PUR** surface treatment improves the product performance in term of stain resistance and durability.

According to ISO 22196, **TARASAFE STANDARD** has **anti-bacterial activity** against MRSA of 99% after 24h.




TARASAFE PLUS / TARASAFE SUPER: NON-TREATED.....

TARASAFE SUPER

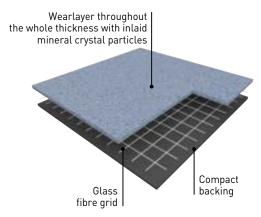

TARASAFE PLUS

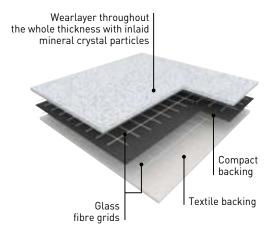

TARASAFE PLUS and **TARASAFE SUPER** are slip resistant safety vinyl floorcoverings, with a PVC wear layer and deeply inlaid mineral crystal particles (patented). They are reinforced by a glass fibre grid and available in a sheet format. They are an ideal solution for heavy traffic applications where slip resistance, durability, hygiene and easy maintenance are required.

TARASAFE PLUS comprises a textile backing for better adherence in wet areas. It helps reducing telegraphing.

TARASAFE SUPER and **PLUS** are suitable for most contract & commercial areas. They are eco-friendly, 100% recyclable, Floorscore® certified and do not contain any heavy metals or CMR 1&2, they are also 100% compliant with REACH.

The product emission rate of volatile organic compounds is < 100 microgram/m³ (TVOC after 28 days – ISO 16000 -6).

TARASAFE





Compatt Comfort R10 R12 SparClean®







- ► Easy to clean and maintain: due to a compacted non porous surface made of vinyl content
- ▶ Permanent slip resistance: dense concentration of deep inlaid mineral crystal particles throughout the wear layer
- ► Enhanced colour, design and brightness: due to the mineral crystal particles
- ► Highest abrasion rating
- ▶ Indoor Air Quality: low VOC emission

			TARASAFE					
				ULTRA		ULTRA COMFORT		PLUS
DESCRIPTION								
Total thickness	EN ISO 24346	mm	2	.0	2.0	3.2	2.2	2.5
Thickness of wearlayer	EN ISO 24340	mm	1.00	0.85	0.85	0.85	1.12	1.14
Weight	EN ISO 23997	g/sqm	2370	2460	2460	2960	2880	3090
Width/Length of sheet	EN ISO 24341	cm/ml	200	/20	200/20	200/20	200/20	200/20
CLASSIFICATION								
Norm/Product specification	-	-		EN ISO 10582	2	EN 651	EN ISO	0 10582
European classification	EN ISO 10874	class	34	-43	34-43	34-42	34	-43
Fire rating	EN 13501-1	class	BfI	-s1	B _{fl} -s1	B _{fI} -s1	Bfl	-s1
Static electrical propensity	EN 1815	kV	<	2	< 2	< 2		2
SLIP RESISTANCE								
Pendulum Test (dry & wet)	BS 7976-2	PTV (degree)	>	36	> 36	-		
Surface roughness	-	μm	Rz	≥ 20	Rz ≥ 20	-		-
Ramp test with oil	DIN 51 130	class	R	10	R10	R10	R12	R10
Ramp test with water	DIN 51 097	class		3	В	-		<u> </u>
Ramp test	EN 13845 (annex C)	class	ESf /	ESb	ESf / ESb	-		-
PERFORMANCES								
Wear resistance	EN 660.2	mm³	<u> </u>	2	≤ 2	≤ 2	•	:2
Wear group	-	-			T	T		T
Type Binder content	EN ISO 10582	type			1	-		l
Dimensional stability	EN ISO 23999	%	< 0	.40	≤ 0.40	≤ 0.40	≼ (1.40
Residual indentation: exigency	EN ISO 24343-1	mm	< 0	.10	≤ 0.10	≤ 0.20	< (1.10
Residual indentation (average measure)	-	mm	≃(0.03	≃ 0.05	≃ 0.03	~	0.03
Castor chair test (type W)	ISO 4918	-	0	K	0K	0K	С	ıK
Impact sound Insulation	EN ISO 717-2	dB		-	-	16		-
Thermal conductivity	EN ISO 10456	W/(m.K)	0.	25	0.25	0.25	0.	25
Colour fastness	EN 20 105-B02	degree	>	6	≥ 6	≥ 6	≽	6
Surface treatment	-	-	SparC	lean®	PUR	SparClean®		-
Chemical products resistance	EN ISO 26987	-	0	K	OK	0K	C	ΙK
Anti-bacterial activity (MRSA) [1]	ISO 22196	-		9% growth	> 99% inhibits growth	> 99% inhibits growth		-
ENVIRONMENT / INDOOR	AIR QUALITY							
TVOC after 28 days	ISO 16000-6	microgram/m³	< 1	00	< 100	< 100	< '	100
Certification	-	-	Floors	score®	Floorscore®	Floorscore®	Floor	score®
CE MARKING								
(6	PAL							
7	EN 1404	¥1 =		M.	Bu-si	En-si		N sa

(1) The implementation of an effective cleaning regime is the most important defence against infection.


TARASAFE GEO

2 m R 10 SparClean®







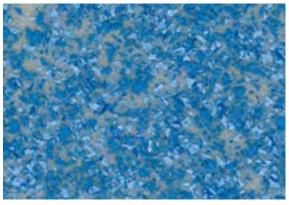

3409 Ocean Wave



3775 Crystalline




3772 Cliff





8081 Trail



3405 Turquoise




3303 Desert



3105 Sunspot

TARASAFE ULTRA, TARASAFE ULTRA COMFORT

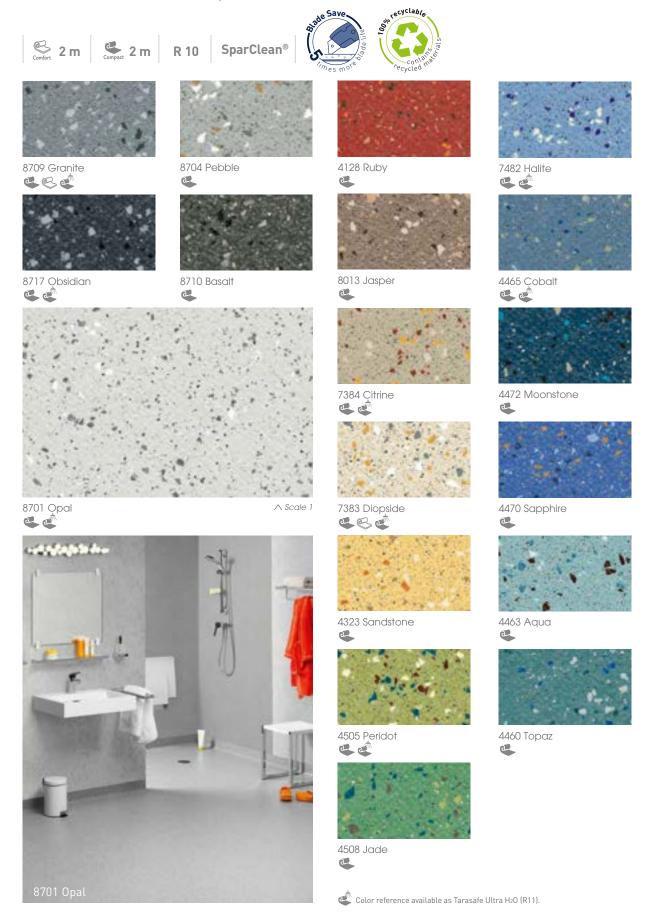

TARASAFE STANDARD - PLUS - SUPER

TARASAFE STANDARD

Compact 2 m R 10 PUR

TARASAFE PLUS

Compact 2 m R 10

∧ Scale 1

TARASAFE SUPER









7302 Sahara⁽¹⁾ Q Plus





7386 Savana^{(1) (2)}



7731 Marbre⁽¹⁾ O Plus





7767 Dove Grey^{(1) (2)}







7773 Storm



7115 Flame




7508 Avocado



7107 Poppy



7704 Sky Blue




7801 Noir



7438 Baleine^{(1) (2)} O. Plus



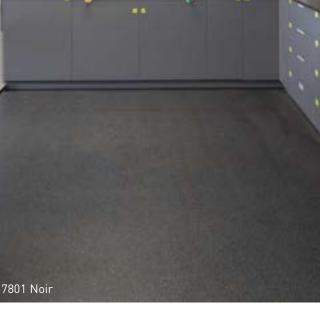


(1) Tarasafe Plus - (2) Tarasafe Super

SHOWER SYSTEM

•

ELEGANCE SD.....

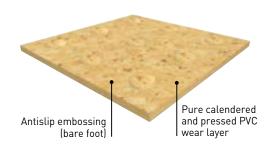


SHOWER SYSTEM ELEGANCE SD is a flexible homogeneous calendered compacted floorcovering available in 2 m sheet, with a non-directional polychrome design, to offer an even colour throughout the thickness. It should be hot welded with a CR 40 welding rod.

SHOWER SYSTEM ELEGANCE SD is specifically embossed for wet barefoot traffic. **ELEGANCE SD** is compliant with antislip resistance norms [R9 according to DIN 51130 and B classification according to DIN 51097] for a **safe usage** in barefoot or shod applications such as showers. The Shower System enables access for all in showers especially for disabled people. It is made of 32% mineral material and 34% renewable material. It uses 100% controled recycled material. The TVOC emissions in the air at 28 days [EN 16000] are < 10 microgram/m³. It is 100% recyclable.

\blacktriangleright

TARASAFE ULTRA H20.....

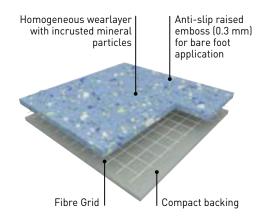

TARASAFE ULTRA H20 is a slip resistant vinyl floorcovering, with a PVC wear layer and deeply inlaid mineral particles and coloured chips for a decorative design together with a raised emboss for better slip resistance.

TARASAFE ULTRA H20 is an ideal solution for traffic applications where enhanced slip resistance with barefoot and durability are required such as wet areas. The specific embossing together with the mineral particles give a Class C barefoot slip resistance (DIN 51 097) and R11 slip resistance (DIN 51 130) which makes **TARASAFE ULTRA H20** ideal for barefoot or shod applications.


It is reinforced with a glass fibre grid in sheet form. Its homogeneous wear layer provides a group P of abrasion.

According to ISO 22196, **TARASAFE ULTRA H20** has **anti-bacterial activity** against MRSA of 99% after 24h.

It does not contain any heavy metals or CMR 1&2 and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is < 100 microgram/m 3 (TVOC after 28 days – ISO 16000 -6). This product is 100% recyclable and contents 18% of mineral material and 22% of inexhaustible material.

I

MURAL CALYPSO

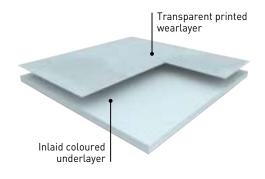

MURAL CALYPSO is a multilayered wall covering in 2 m width roll and with a **B-s2,d0** fire classification according to EN 13501.

It is not welded with CR41 welding rods for a perfect water tightness. It is made of a printed transparent wear layer and a coloured under

It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises 20% of recycled products.

According to ISO 22196, **MURAL CALYPSO** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It does not contain any CMR 1 & 2 component and is 100% compliant with REACH.

It is 100% recyclable.

This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility.

The Shower System is compliant with most laws on "access for all" thanks to the installation in shower without tray.

Gerflor also recommends the Tarasafe compact ranges with surface treatments (SparClean®: Geo & Ultra / PUR: Standard) for the use in wet room areas.

See pages 203-205

ELEGANCE SD / TARASAFE ULTRA H20 / MURAL CALYPSO





The SHOWER SYSTEM provides a safe and hygienic solution thanks to:

- ► Anti-slip resistance floorings
- ▶ 100% waterproof installation

			ELEGANCE SD	TARASAFE ULTRA H20	MURAL CALYPSO
DESCRIPTION					UALIT 30
Total thickness	EN ISO 24346	mm	2.4 (on grainside)	2.0 (on grainside)	0.92
Thickness of wearlayer	EN ISO 24340	mm	2.40	1.0	0.10
Weight	EN ISO 23997	g/sgm	3100	2400	1610
Width/Length of sheet	EN ISO 24341	cm/ml	200/20	200/20	200/30
CLASSIFICATION	2.1.100 2.1011	511,71110	200,20	200/20	200,00
Product specification		-	EN ISO 10581	EN ISO 10582	EN 15 102
European classification	EN ISO 10874	class	34-43	34-43	-
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	B-s2,d0
Static electrical propensity	EN 1815	kV	< 2	< 2	-
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R11	-
Slip resistance wet: bare foot	DIN 51 097	class	В	С	-
Determination of slip resistance barefoot & shod + water	EN 13845- annexe C	class	-	ESb	-
Water tightness	EN 13553	-	OK	In progress	-
Slip resistance wet areas	CTE	class	-	3	-
PERFORMANCES					
Wear resistance	EN 660.2	mm³	≤ 4.0	≤ 4.0	-
Wear group	NF 189	group	Р	Р	-
Type Binder content	ISO 10581	type	I	-	-
Type Binder content	ISO 10582	type	-	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	< 0.40	-
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	-
Residual indentation (measure)	-	mm	≈ 0.03	≃ 0.03	-
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25	-
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK
Anti-bacterial activity [1] [E. coli - S. aureus - MRSA]	ISO 22196	-	-	> 99% ^[2] inhibits growth	> 99% ^[3] inhibits growth
ENVIRONMENT / INDOOR AIR (QUALITY				
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 100	-
Certification	-	-	Floorscore®	Floorscore®	-
CE MARKING					
	EN 1510	02		-	OK
CE	EN 140	41 ₋			-
			© B _{fl} -s1	C _{ff} -s1	+

⁽¹⁾ The implementation of an effective cleaning regime is the most important defence against infection.

⁽²⁾ Anti-bacterial activity (MRSA)

⁽³⁾ Anti-bacterial activity (E. coli - S. aureus - MRSA)

ANTISLIP FLOORINGS - ELEGANCE SD























0705 Patisson

ANTISLIP FLOORINGS - TARASAFE ULTRA H20







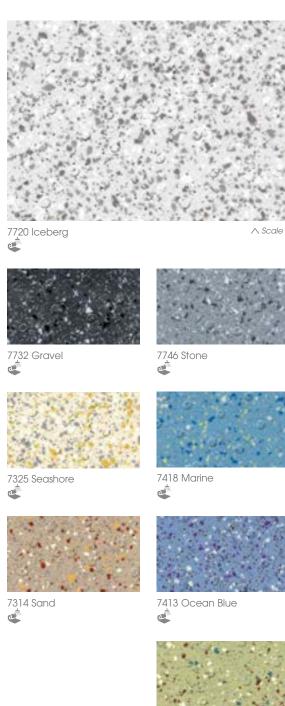

7513 Seagrass

MURAL CALYPSO







7004 Prism Haze Pearl





7003 Prism Ice



7734 Manhattan Concrete



7728 Manhattan Stone



7721 Manhattan Mist



7009 Fossil Haze




7008 Fossil Ice





WALLCOVERINGS MURAL ULTRA / MURAL CLUB / MURAL CALYPSO

MURAL ULTRA




MURAL ULTRA is a flexible wall covering vinyl sheet which has a thickness of 1.5 mm for an extended durability. It has a B-s2,d0 fire classification (EN 13501-1) which complies with most European fire regulations. It is made of a pure PVC coloured surface and a backing which comprises 25% of recycled products. This multi-layered product is reinforced with a nonwoven glassfibre grid for improved resistance to tearing and excellent dimensional stability. It has a great resistance to chemical products staining thanks to its **Protecsol®** surface treatment.

According to ISO 22196, MURAL ULTRA has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h.

The joins are hot-welded to ensure perfect water-tightness. It is 100% recyclable and the components are 100% compliant with REACH.

MURAL CLUB

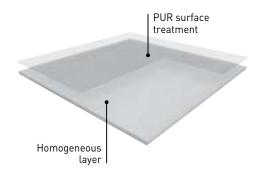

MURAL CLUB is a homogeneous wall covering in 2 m width roll and with a B-s2,d0 fire classification. It is designed to be a permanent wall covering. It is hot welded with CR40 welding rods for better hygiene. It is made of calendered layer with colour throughout the whole thickness

for an nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a PUR surface treatment which provides good resistance to chemical products and makes maintenance easier. According to ISO 22196, MURAL CLUB has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. MURAL CLUB is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.


MURAL CALYPSOSee page 210

WALLCOVERINGS MURAL ULTRA / MURAL CLUB

- ▶ Easily seam welded to produce continuous surfaces.
- ▶ Create a safe and hygienic environment.
- ► Flexible and easy to cove.
- ▶ Ideal for walls and ceilings.
- ► Recyclable and Eco responsible.

			MURAL ULTRA	MURAL CLUB
DESCRIPTION				
Total thickness	EN ISO 24346	mm	1.5	1.00
Thickness of wearlayer	EN ISO 24340	mm	0.65	1.00
Weight	EN ISO 23997	g/sqm	2600	1780
Width/Length of sheet	EN ISO 24341	cm/ml	200 / 21	200 / 30
CLASSIFICATION				
Product specification	-	-	EN 15 102	EN 15 102
Fire rating	EN 13501-1	class	B-s2,d0	B-s2,d0
PERFORMANCES				
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	PUR
Chemical products resistance	EN ISO 26987	-	ОК	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) [1]	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
CE MARKING				
C€	EN 15102		ОК	

(1) The implementation of an effective cleaning regime is the most important defence against infection.

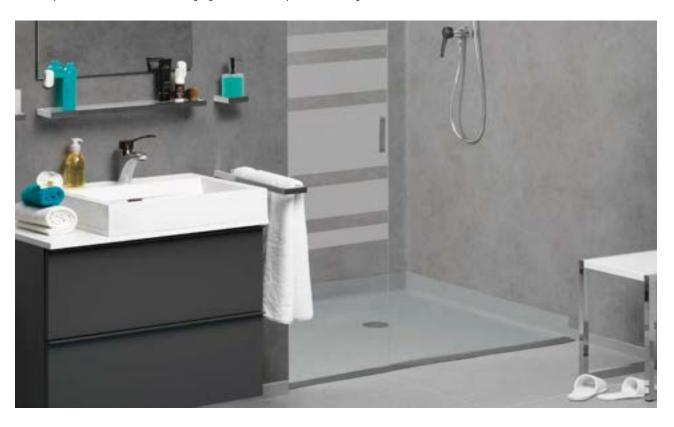


MURAL ULTRA



∧ Scale1

MURAL CLUB

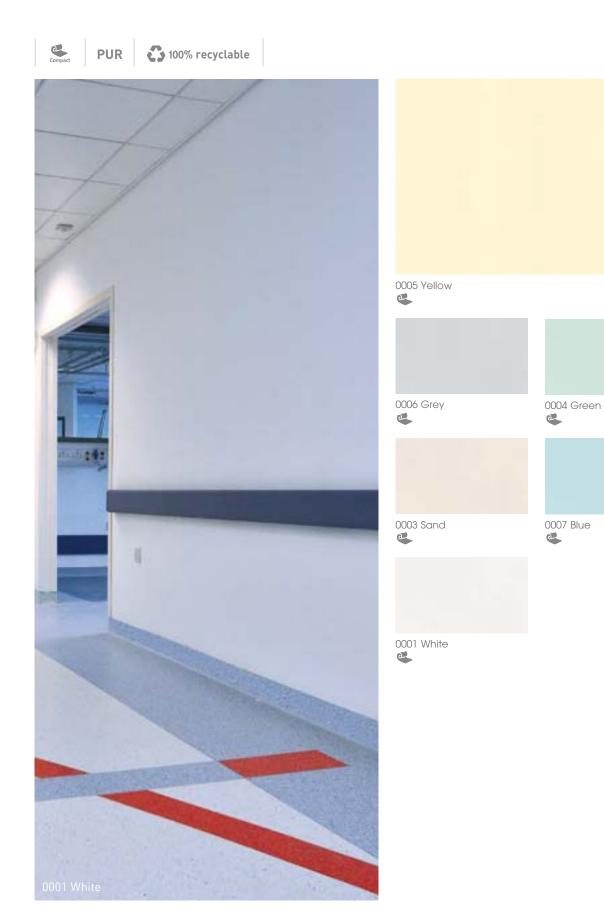




Creative by Nature KEY POINTS TO REMEMBER ABOUT GERFLOR DLW LINOLEUM The DLW brand stands for 150 years of experience and has been considered a reference since its creation. The greenest solution on the market: 98% bio based material / 76% rapidly renewable / up to 40% recycled content. Unlimited possibilities in terms of creativity, allowing unique and differentiating designs. buildings, from education to healthcare, from public buildings to offices, thanks to a complete portfolio of compact, acoustic, sport and industrial solutions.

Compact Linoleum	. 226-237
Marmorette	228-230
 Arabesque 	23
• Colorette	232
Uni Walton	233
• Lino Art	234-237
- Urban	234
- Star	238
- Metallic	230
- Flow	237
- 1 10 W	201
Acoustic Linoleum	. 238-24
Marmorette Acoustic	240
Marmorette AcousticPlus	240
Colorette AcousticPlus	24
Technic Linoleum	. 242-243
High Mechanical Traffic Linodur	243
Dissipative Linoleum Marmorette LCH	240
Dissipative Linolean Maimorette LCT	240
Finishes	24/
Cleaning Linoleum Floors	24

DLW LINOLEUM - Sustainable by Nature

Natural Composition _____

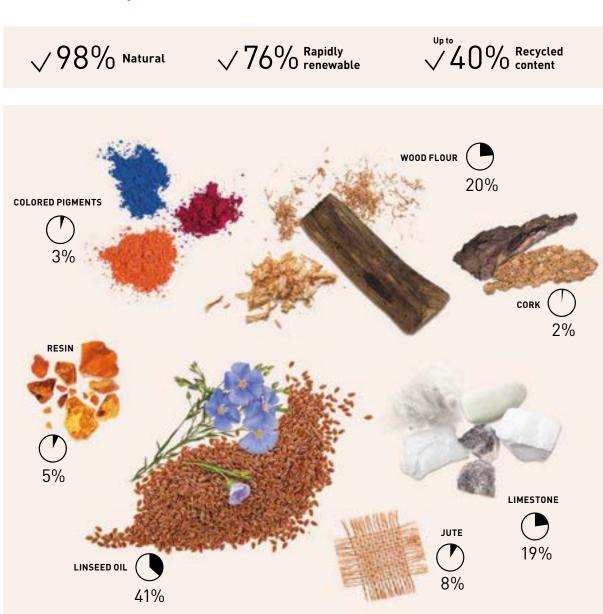

Eco labels _____


























Cradle to Cradle Certified™ Silver⁽¹⁾

Developed using cicular economy principles

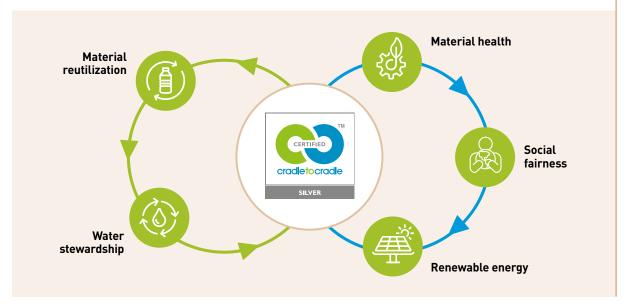

[1] Marmorette, Arabesque, Colorette, Uni Walton, Lino Art Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.

Carbon neutral⁽²⁾

Third party certified EPD indicates carbon neutrality during the first stages of its life cycle.



(2) From Cradle to Gate: includes raw materials and manufacturing process (A1-A3 stages of EPD) Source: Environmental Performance Declaration (EPD). Certified by Evea. More information on gerflor.com

DLW LINOLEUM - Protective by Nature



NEW SOLVENT-FREE SURFACE PROTECTION, DEVELOPED EXCLUSIVELY FOR LINOLEUM.

Extremely hard-wearing due to triple laser UV cross-linking technology



INDOOR AIR QUALITY __



- Very low VOC emissions TVOC < 10 microgram/m³ after 28 days (ISO 16516)
- Certified according to the most demanding standards













NATURAL DESIGN.

MATT EFFECT





LPX / PUR / OTHERS...



EXCLUSIVE







- Dirt and stain barrier
- Cost effective maintenance
- Easy cleaning with a mop or any modern cleaning equipment



Detailed cleaning protocol available on www.gerfor.com



DLW Linoleum floorings contribute to lower the microbe load (bacteria, virus, ...) and to minimise the risk of a contamination chain.

- Excellent resistance against disinfection chemicals
- Anti-viral and anti-bacterial activity





- No sealing and waxing needed
- Higher scratch resistance
- Easy to repair: in case of heavily damaged flooring, DLW linoleum can be easily repaired using the spray buffing method (red disk)

WAXING

NEOCARE™ is a high performing surface treatment protecting against dirt, stains and scratches and does not require any sealing & waxing throughout the life of the product. Waxing remains an option.







DLW LINOLEUM

			MARMORETTE	ARABESQUE	COLORETTE
DESCRIPTION					
Total thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Thickness of cork / foam backing	EN ISO 24340	mm	-	-	-
Weight	EN ISO 23997	g/sqm	2400 / 2900 / 3800	2900	2900
Width of sheet	EN ISO 24341	cm	200	200	200
Length of sheet	EN ISO 24341	m	20-31	20-31	20-31
CLASSIFICATION					
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43 23 / 32 / 41 in 2.0 mm	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾
Slip resistance	ASR A1.5 /DIN 51130 - BGR 181	class	R9	R9	R9
Barefoot splipping	DIN 51097	class	-	-	-
Impact sound insulation	EN ISO 717-2	dB	3 dB / 5 dB / 6 dB	5 dB	5 dB
PERFORMANCES					
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11 / ≤ 0.11	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105 - B02	degree	6	6	6
Vertical resistance	EN 1081	Ohm	-	-	-
Point contact resistance	VDE 0100	k0hm	> 200	> 200	> 200
Static electrical propensity	EN 1815	kV	≈ 2.0	≈ 2.0	≈ 2.0
Castor chair test (Type H)	ISO 4918	-	OK	OK	OK
Flexibility	ISO 24344	mm	Ø 20 (2,5 mm)	Ø 20	Ø 20
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17	0.17
Surface treatment	-	-	Neocare™	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	OK	OK	OK
Anti-bacterial activity (E. coli – S. aureus – MRSA) after 24 hours ^[2]	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99,99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5h ^[2]	ISO 21702	-	> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity
INDOOR AIR QUALITY					
TVOC after 28 days	EN 16516	microgram/m³	< 10	< 10	< 10
CIRCULAR ECONOMY					
Certification	Cradle to Cradle	-	Silver	Silver	Silver
CE MARKING					
CE	EN 14041: 2004 AC: 2006	-			

⁽¹⁾ Glued according to certificate.

DOP numbers available from your local branch.



Depending on light exposure, the product color can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

⁽²⁾ The implementation of an effective cleaning method is the best defense against infection.

UNI WALTON	LINO ART URBAN / FLOW / METALLIC / STAR	MARMORETTE ACOUSTICPLUS 19dB	COLORETTE ACOUSTICPLUS 19dB	MARMORETTE ACOUSTIC 15dB	LINODUR	MARMORETTE LCH
2.5	2.5	4.0	4.0	4.0	4.0	2.5
Jute fabric	Jute fabric	Foam backing	Foam backing	Cork and jute fabric	Jute fabric	Jute fabric
-	-	1.5	1.5	2.0	-	-
2900	2900	3500	3500	3900	4700	3000
200	200	200	200	200	200	200
20-31	20-31	20-31	20-31	20-31	20-31	20-31
EN ISO 24011	EN ISO 24011	EN 686	EN 686	EN 687	EN ISO 24011	EN ISO 24011
23 / 34 / 43	23 / 34 / 43	23 / 33 / 41	23 / 33 / 41	23 / 33 / 41	23 / 34 / 43	23 / 34 / 43
C _{fl} -s1 ^[1]	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ^[1]	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾
R9	R9	R9	R9	R9	R9	R9
-	-	-	-	-	Α	-
5 dB	5 dB	19 dB	19 dB	15 dB	6 dB	3 dB
≤ 0.11	≤ 0.11	≤ 0.30	≤ 0.30	≤ 0.40	≤ 0.20	≤ 0.11
6	6	6	6	6	6	6
-	-	-	-	-	-	10 ⁶ ≤ R ≤ 10 ⁸
> 200	> 200	> 200	> 200	> 200	> 200	> 100
≈ 2.0	≈ 2.0	2.0	2.0	2.0	2.0	2.0
0K	0K	0K	0K	OK	0K	OK
Ø 20	Ø 20	-	-	-	-	-
0.015	0.015	0.044	0.044	0.04	0.023	0.015
0.17	0.17	0.0937	0.0937	0.17	0.17	0.17
Neocare™	Neocare™	Neocare™	Neocare™	Neocare™	LPX	LPX
OK	OK	OK	OK	OK	0K	OK
> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth
> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity	-	-
< 10	< 10	< 10	< 10	< 10	-	-
Silver	Silver	Bronze	Bronze	Silver	-	-










COMPACT LINOLEUM

MARMORETTE / ARABESQUE / COLORETTE / UNI WALTON / LINO ART

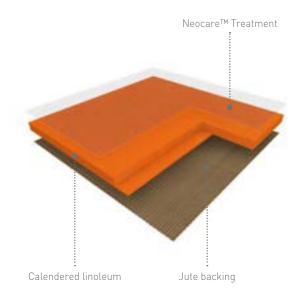





MARMORETTE / ARABESQUE / COLORETTE / UNI WALTON / I INO ART

MARMORETTE is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400 g/sqm in 2.0 mm, 2900 g/sqm in 2.5 mm and 3800 g/sqm in 3.2 mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

ARABESQUE is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900 g/sqm in 2.5 mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

COLORETTE is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900 g/sqm in 2.5 mm.

It features a speckled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

UNI WALTON is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900 g/sqm in 2.5 mm. It features a uni design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

LINO ART is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900 g/sqm in 2.5 mm. It features a striated design (FLOW), a scattered metallic design (METALLIC), a scattered colour chips design (STAR), a concrete design (URBAN) and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

ARABESQUE, COLORETTE, MARMORETTE, UNI WALTON, LINO ART

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. It is Floorscore®, M1 and Blue Angel certified.

The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certifiedTM Silver. They are Environmental Performance Declaration (EPD) certified by an external laboratory indicating carbon neutrality during the first stages of their life cycle ("from cradle to gate").

The Camouflage (Arabesque, Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, anti-bacterial according to ISO 22196 / JIS Z 2801 and anti-viral according to ISO 21702.

COMPACT LINOLEUM

MARMORETTE











0056 Foggy Blue 2.0 mm / 2.5 mm / 3.2 mm



0253 Pebble Grey 2.5 mm



0252 Light Grey 2.5 mm



0251 Cream 2.5 mm



0053 Ice Grey 2.0 mm / 2.5 mm / 3.2 mm



0254 Mineral Grey 2.5 mm



0155 Smoked Pearl 2.5 mm



0106 Hazelnut Shake 2.5 mm



0055 Ash Grey 2.0 mm / 2.5 mm / 3.2 mm



0166 Clay 2.5 mm



0091 Shiitake Mushroom 2.5 mm



0146 Beeswax Beige 2.5 mm



0054 Concrete Patty 2.5 mm



0158 Tabac Grey 2.5 mm



0153 Greystone Grey 2.5 mm



0090 Soapstone 2.5 mm



0160 Industrial Grey 2.0 mm / 2.5 mm



0050 Quartz Grey 2.0 mm / 2.5 mm / 3.2 mm



0164 Milk Coffee 2.5 mm



0003 Dark Brown 2.5 mm



0096 Midnight Grey 2.5 mm



0059 Plumb Grey 2.0 mm / 2.5 mm / 3.2 mm



0108 Mokka Brown 2.5 mm



0089 Peacan Pie 2.5 mm

MARMORETTE




NeocareTM







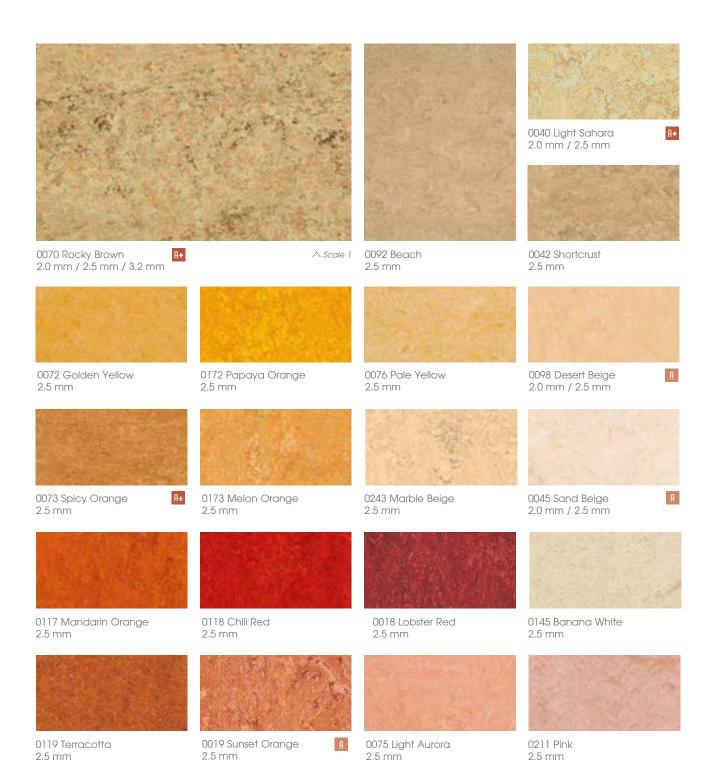

MARMORETTE











0130 Antique Green 2.5 mm



0049 Royal Blue 2.5 mm / 3.2 mm



0121 Blue Eyes 2.5 mm



0100 Frog Green 2.5 mm



0043 Leaf Green 2.5 mm



0148 Ink Blue 2.5 mm



0023 Dusty Blue 2.0 mm / 2.5 mm / 3.2 mm



0132 Lime Green 2.5 mm



0099 Grey Turquoise 2.5 mm



0128 Violet 2.5 mm



0122 Fluffy Blue 2.5 mm



0138 Khaki 2.5 mm



0022 Autumn Blue 2.5 mm / 3.2 mm



0224 Mystery Blue 2.5 mm



0026 Sky Blue 2.5 mm



0083 Jungle 2.5 mm



0136 Turquise Bay



0149 Dark Blue 2.5 mm



0028 Dive 2.5 mm



0129 Curacao Petrol 2.5 mm





∧ Scale 1

A Acoustic 15 dB in stock


A+ AcousticPlus 19 dB in stock


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

ARABESQUE







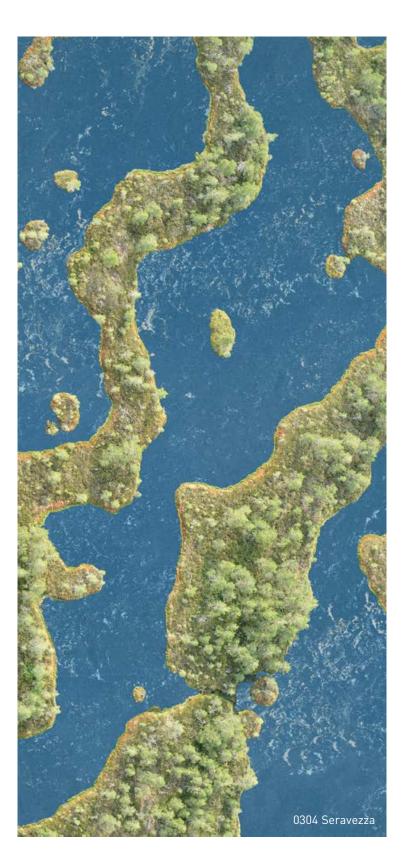



0302 Antico 2.5 mm



0305 Monarca 2.5 mm



0303 Verona 2.5 mm



0306 Prato 2.5 mm



0301 Alcino 2.5 mm



0304 Seravezza 2.5 mm

∧ Scale 1


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

COMPACT LINOLEUM

COLORETTE









A+ : AcousticPlus 19 dB in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer.

UNI WALTON



NeocareTM





LINO ART URBAN











0551 Flashy Asphalt Grey 2.5 mm



0554 Concrete Grey 2.5 mm





0552 Silver Grey 2.5 mm



0564 Natural Stone 2.5 mm



0555 Flashy Street Grey 2.5 mm




0550 Beton Soft Grey 2.5 mm



0567 Shining Green 2.5 mm



0556 Mud Grey 2.5 mm



0557 Urban Grey 2.5 mm



0558 Screed Grey 2.5 mm



0566 Shining Blue



0562 Titan Grey



0560 Bold Grey



0559 Vintage Grey 2.5 mm



0565 Graphite Grey 2.5 mm



0563 Zinc Grey 2.5 mm



0553 Dark Concrete Grey 2.5 mm



0561 Pitch Black 2.5 mm


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

LINO ART STAR







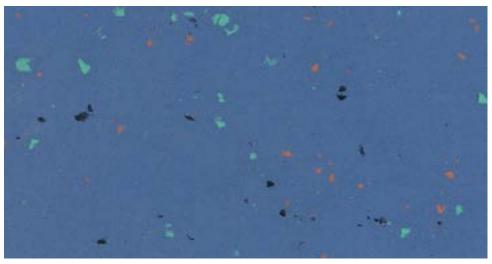

0025 Clear Blue \land Scale 1 2.5 mm



0020 Aqua Turquoise 2.5 mm



0001 Lemon Yellow 2.5 mm



0092 Stratiatella 2.5 mm



0030 Apple Green 2.5 mm



0075 Apricot 2.5 mm



0059 Dusty Grey 2.5 mm



0023 Blue Turquoise 2.5 mm



0015 Glaring Red 2.5 mm



0090 Smooth Grey 2.5 mm



0094 Bubble Gum 2.5 mm



0085 Mid Grey 2.5 mm

LINO ART METALLIC









0072 Olive Green 2.5mm





0078 Petrol Blue 2.5mm



0070 Cool Grey 2.5mm



0083 Aluminio Light Grey 2.5mm



0068 Bottle Green 2.5mm



0074 Burned Siena



0080 Firmament Black 2.5mm



0076 Salsa 2.5mm




LINO ART FLOW








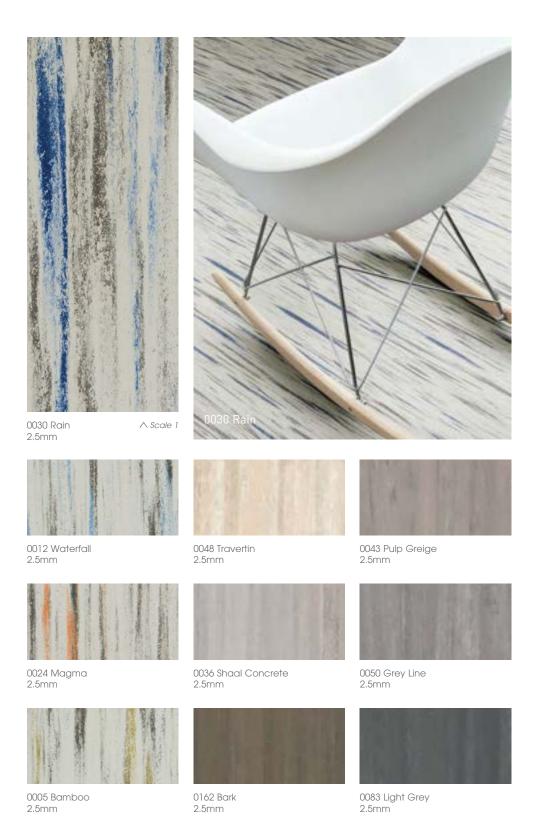


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All colors can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

ACOUSTIC LINOLEUM


MARMORETTE ACOUSTICPLUS / COLORETTE ACOUSTICPLUS

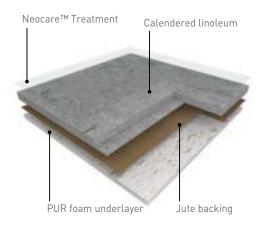

MARMORETTE ACOUSTIC

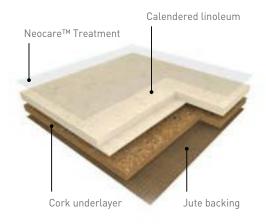

KORKMENT: CORK ACOUSTIC UNDERLAYER



2.0 mm underlayer (weight 1.2 kg/sqm), 14 dB impact sound reduction

0102 Korkment





MARMORETTE ACOUSTICPLUS COLORETTE ACOUSTICPLUS

MARMORETTE ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500 g/sqm in 4.0 mm.

It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5 mm recycled foam underlayer, ensuring up to 19 dB impact sound reduction.

COLORETTE ACOUSTICPLUS is a calendered linoleum acoustic floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500 g/sqm in 4.0 mm.

It features a speckled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5 mm recycled foam underlayer, ensuring up to 19 dB impact sound reduction.

MARMORETTE ACOUSTIC

MARMORETTE ACOUSTIC is a calendered linoleum acoustic floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas.

Its weight is 3900 g/sqm in 4.0 mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 2 mm cork underlayer, ensuring up to 15 dB impact sound reduction.

ACOUSTIC LINOLEUM

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. They are Floorscore®, M1 and Blue Angel certified. The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certifiedTM Bronze (Marmorette AcousticPlus) and Cradle to Cradle certifiedTM Silver (Marmorette Acoustic). Their Environmental Performance Declaration (EPD) certified by an external laboratory, indicate carbon neutrality during the first stages of their life cycle ("from cradle to qate").

The Camouflage (Arabesque, Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible.

They are antistatic, anti-bacterial according to ISO 22196 / JIS Z 2801 and anti-viral according to ISO 21702.

ACOUSTIC LINOLEUM

MARMORETTE ACOUSTIC



© 15 dB Neocare™





4.0 mm



0098 Desert Beige 4.0 mm



0045 Sand Beige 4.0 mm



0059 Plumb Grey 4.0 mm



0053 Ice Grey 4.0 mm



0023 Dusty Blue 4.0 mm

All other colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.







0129 Curacao Petrol 4.0 mm



0130 Antique Green 4.0 mm



0022 Autumn Blue 4.0 mm



0073 Spicy Orange



0070 Rocky Brown



0040 Light Sahara 4.0 mm



0096 Midnight Grey 4.0 mm



0059 Plumb Grey 4.0 mm



0053 Ice Grey 4.0 mm

All other colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer. All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

COLORETTE ACOUSTICPLUS | 19 dB | Neocare™










All other colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1200 sqm. Below 1200 sqm, use Korkment underlayer.

All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 60 sqm.

LINODUR - HIGH MECHANICAL TRAFFIC RESISTANCE

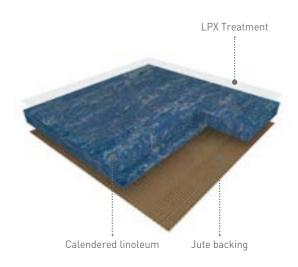

LINODUR is a calendered linoleum compact floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high pedestrian and mechanical traffic areas and has been designed to resist a 30 kg/sqm dynamic load. Its weight is 4700 g/sqm in 4.0 mm.

It features a moiré design and is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

The flooring is equipped with LPX surface treatment, making the maintenance easy and the flooring long lasting.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, anti-bacterial according to ISO 22196 / JIS Z 2801. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance.

This product is manufactured in a plant awarded with ISO 9001 (quality), ISO 14 001 (environment) and ISO 50001 (energy) certifications. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions).

MARMORETTE LCH - DISSIPATIVE LINOLEUM FOR ESD AREAS



MARMORETTE LCH is a calendered linoleum compact dissipative floorcovering in sheet, 2 m wide, providing excellent resistance to everyday wear and tear in high traffic areas.

Its vertical resistance is $10^6 < R < 10^8 \Omega$.

Its weight is 3000 g/sqm in 2.5 mm.

It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

The flooring is equipped with LPX surface treatment, making the maintenance easy and the flooring long lasting.

The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance.

It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, anti-bacterial according to ISO 22196 / JIS Z 2801.

LINODUR - HIGH MECHANICAL TRAFFIC RESISTANCE











0020 Spring Blue 4.0 mm

0020 Spring Blue



∧ Scale 1

0024 Speckled Blue 4.0 mm



0056 Marble Grey 4.0 mm



0081 Sporty Black 4.0 mm



0011 Avocado Green 4.0 mm



0072 Peach Orange 4.0 mm



MARMORETTE LCH -DISSIPATIVE LINOLEUM FOR ESD AREAS













0023 Dusty Blue 2.5 mm



0055 Ash Grey 2.5 mm

FINISHES

SKIRTINGS



MDF

Color: White




COVE FORMER

Color: 6512



HSLA

WELDING RODS



MARMORETTE, ARABESQUE & LINODUR

Camouflage welding rod: invisible joints.

Welding rod matching table available on: gerflor.com



COLORETTE, UNI WALTON & LINO ART

Uni welding rod:
a large palett of colours.

CLEANING LINOLEUM NEOCARE TREATED FLOORS

MARMORETTE & LCH / ARABESQUE / COLORETTE / UNI WALTON / LINO ART



Damp sweeping equipment

Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips



Manual washing equipment

Disposable microfibre mop or gauze



Single disk machine



Autoscrubber



Mechanical cleaning disk

3M (or equivalent) colour disks

	EQUIPMENT USED	CLEANING PRODUCTS	CLEANING METHODS
First use Manual or mechanical cleaning	or or if soiled	Neutral detergent or Alkaline detergent	Damp sweeping Mechanical washing at 160-200 rpm (with water recovery)
Daily cleaning Manual cleaning		Neutral detergent / Disinfectant detergent ⁽¹⁾	Damp sweeping Manual washing with flat mop Rinsing
Mechanical cleaning		Neutral detergent	Damp sweeping Mechanical washing at 160-200 rpm (with water recovery)
Deep cleaning Mechanical cleaning		Alkaline detergent	Damp sweeping Mechanical washing at 160-200 rpm (with water recovery)

⁽¹⁾ In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.

These cleaning instructions have to be adapted depending on traffic and location of the area.

Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: www.gerflor.com

INSTALLATION &
MAINTENANCE GUIDELINES
AVAILABLE ON
GERFLOR.COM







Taraflex™ Synthetic Sports Floorings	.250-263
Connor Sports®	.264-265
Sport Court®Outdoor Surfaces	.266-271
DLW Linoleum Sports Floorings	. 272-27 7
Powershock	278-280
Our solutions for	281

GERFLOR



INDOOR SYNTHETIC FLOORS: THE BEST PERFORMING PRODUCTS ON THE MARKET

Taraflex® has been one of the pioneer in 1947 when developping synthetic floors and is today the world leading brand for indoor sports floor.

With a complete range of products, Gerflor offers the perfect solution adapted to all users and usages, from low impact activities through to elite and performance sports.

Gerflor sets itself the highest standards when it comes to the environmental quality of its products.

TARAFLEX® SPORT FLOORS ARE RECOGNISED ALL OVER THE WORLD

Every day more than million children play on a Taraflex® sports floor.

3500 high level competitions per year are played on a Taraflex® sports floor.



WHERE CHAMPIONS PLAY



HARDWOOD FLOORING SYSTEMS:

MORE THAN 100 YEARS

OF EXPERIENCE



Founded in 1872, Connor Sports® is the market leader in portable and permanent hardwood sports flooring systems. Connor Sports® professional engineers lead the industry in new product design and development, setting the standard for innovative solutions in sports surfacing. In 1914, Connor Sports® installed the first basketball court in the USA. In the late 90's, Boston Celtics selected Connor Sports® to repurpose their famed parquet into a portable flooring system.



OUTDOOR SURFACES: WORLD'S LEADING OUTDOOR SPORT SURFACE



In 1974, Sport Court® created the outdoor game court. Since then, over 150,000 courts have been installed worldwide.

Sport Court®'s superior outdoor play surface is designed to:

- keep athletes safe
- allow for year-round sports activity
 - eliminate costly annual maintenance



INDOOR SPORT AREAS:
HISTORIC LEADER
IN LINOLEUM SPORT FLOORING



DLW Linoleum has been manufacturing high class sport linoleum for over 30 years and is proud to deliver uncompromising product quality.

Adapted to both specific and multi-function use, linoleum high performance floors are a great option to address various applications, from kindergartens to multipurpose halls and fitness centres.

Thanks to its acknowledged sustainable features, millions of square metres of sport linoleum have been installed over the years and still convince new generations of users.







252-253 WHY SHOULD YOU CHOOSE TARAFLEX®?

254-255 HOW TO CHOOSE THE RIGHT FLOOR?

256-257 A LARGE PALETTE OF COLOURS AND DESIGNS

258 RACKET SPORTS

259 DISABILITY AND ROLLING SPORTS

260-261 ALL YOU NEED TO KNOW

262-263 INNOVATIVE SERVICES TO MAKE YOUR FLOOR UNIQUE

WHY SHOULD YOU

1 FOR PERFORMANCE

1 Protecsol®

An intelligent surface with the unique and patented triple action Protecsol®:

- ▶ Best solution to maximise both slide and grip.
- ▶ A friction-burn free surface, on which the temperature during a fall is reduced by 25%.
- ▶ Cost effective and easy to maintain.

2 D-Max


D-MaxTM surface is a UNIQUE complex made up of calendered PVC sheets reinforced with a fibreglass grid.

- ► High durability
- Outstanding dimensional stability

3 CXP HD


Taraflex® Double Density Technology

Best shock absorption properties

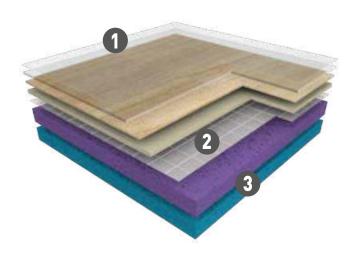

POR PROTECTION

The floor that brings **immediate protection on impact** to all users when falling, diving or sliding on the floor.

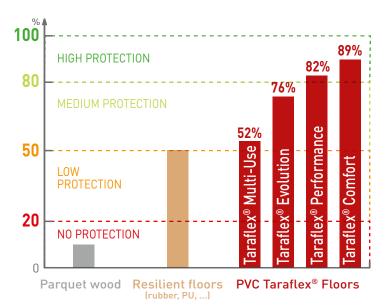


Gerflor offers Taraflex® Comfort, a P3 floor with the highest level of comfort on the market.

CHOOSE TARAFLEX®?

3

FOR SAFETY

Shock absorption **minimises the force** of impact on the body and reduces long term injury risk.

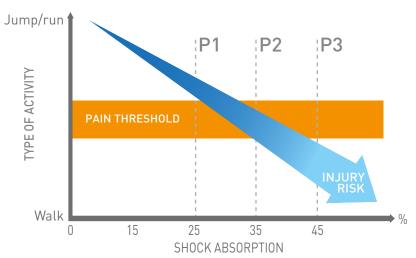


With a complete range of shock absorption P1/ P2/P3, Gerflor provides the right solution and the best safety for every user.

4

FOR **DURABILITY**

Taraflex® technologies ensure long-lasting **HIGH PERFORMANCE**

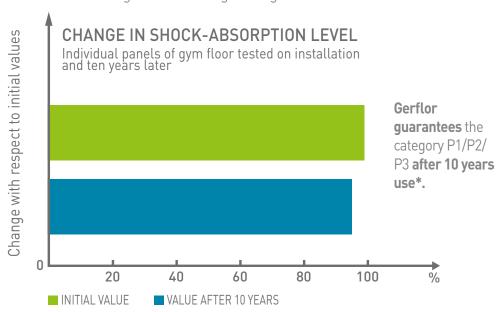

*Gerflor's internal ageing tests

PARTNER OF MAJOR SPORTS EVENTS




















HOW TO CHOOSE

MULTI SPORT

EDUCATION, CLUB & COMPETITION



TARAFLEX® **EVOLUTION**

THE REFERENCE IN SPORTS FLOORING





7.5 mm

ALSO AVAILABLE WITH Dry-Tex*





TARAFLEX® **PERFORMANCE**


BEST BALANCE OF SPORT PERFORMANCE AND SAFETY





ALSO AVAILABLE WITH Dry-Tex





TARAFLEX®








P1, P2, P3: point elastic sports flooring classification according to EN 14904

THE RIGHT FLOOR?

MULTI PURPOSE

SPORT & NON-SPORT ACTIVITIES









6.2 mm





HEAVY DUTY MULTI PURPOSE

HEAVY LOAD RESISTANCE AND SHOCK ABSORPTION





A LARGE PALETTE

NATURAL AND VIBRANT COLOURS FOR MULTISPORTS

ALL COLOURS ARE AVAILABLE WITH

TARAFLEX® SURFACE

TARAFLEX® COMFORT TARAFLEX® PERFORMANCE AND TARAFLEX® EVOLUTION



OF COLOURS AND DESIGNS

MODERN AND URBAN DESIGNS FOR MULTI-ACTIVITIES

ALL COLOURS ARE AVAILABLE WITH

TARAFLEX® MULTI-USE







4435 - WOOD Blue / T = 17.7

6844 - Black Strips / Y = 14.5

3708 - Wood Grey / Y = 34.2



4331 - Wood Natural / Y = 29.9

2790 - Polished Concrete Dark Grey / Y = 15.3



8069 - Wood Chocolate / Y = 9.4




2791 - Polished Concrete Light Grey / Y = 27.4

RACKET SPORTS

- ▶ Racket sport floors should offer an excellent compromise between slide and grip for lateral moves, accelerations and changes of direction.
- Gerflor offers a complete range of solutions for **racket sports** with different types of installation methods (portable and permanent floors) to meet player's expectations and facilities needs.

TARAFLEX® TABLE TENNIS



PERMANENT SOLUTION

THICKNESS



ENGINEERED AND DEVELOPED IN PARTNERSHIP WITH THE INTERNATIONAL TABLE TENNIS FEDERATION (ITTF)






PERMANENT SOLUTION 6109 Framboise



PORTABLE SOLUTION 6109 Framboise




PORTABLE SOLUTION

3.7 mm





TARAFLEX® BADMINTON



PERMANENT SOLUTION



4.5 mm 7.5 mm P1



THE ULTIMATE FLOOR FOR BADMINTON MOVEMENTS






PERMANENT SOLUTION



PORTABLE SOLUTION 6570 Mint Green




PORTABLE SOLUTION

THICKNESS

3.9 mm

TARAFLEX® TENNIS



PERMANENT SOLUTION











THE IDEAL AND SAFEST TENNIS SURFACE FOR ALL PLAYERS

6473 New York


Sports

APPLICATIONS


DISABILITY AND ROLLING SPORTS

▶ Taraflex® Sports Floorings are recognised all over the world for all types of sports. Cushioned floors, with high IPI values offer the best solution for sitting sports.

TARAFLEX® MULTI-USE

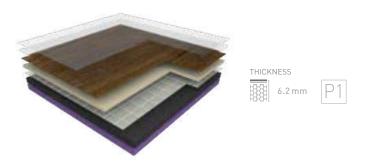


TARAFLEX® SURFACE

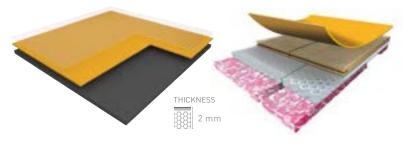

THE IDEAL COMBINATION BETWEEN SPORTS PERFORMANCE AND RESISTANCE TO ROLLING LOADS



TARAFLEX® COMFORT

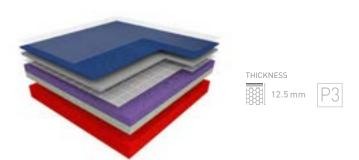

THE PERFECT SOLUTION FOR SAFETY AND PROTECTION



ALL YOU NEED

Description	Standard	Requirement	Units	Taraflex [®] Surface	Taraflex [®] Surface Mask	Taraflex [®] Multi-Use	Taraflex [®] Evolution	Taraflex [®] Performance	Taraflex [®] Comfort	
Dry-Tex™ System	-	-	-	-	-	-	D	D	-	
Product Description										
Surface treatment	-	-	-	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	Triple-Action Protecsol®	
Surface complex	-	-	-	D-Max™	100% PVC	D-Max™	D-Max™	D-Max™	D-Max™	
Foam	-	-	-	-	-	CXP-HD+™	CXP-HD™	CXP-HD™	CXP-HD™	
Thickness	EN ISO 24346	-	mm	2	2	6.2	7.5	9	12.5	
Weight	EN ISO 23997	-	kg/m²	2.9	2.58	4.2	4.7	5.25	5.1	
Length*	EN ISO 24341	-	lm	26.5 Max	20 Max	26.5 Max	26.5 Max	26.5 Max	26.5 Max	
Width	EN ISO 24341	-	lm	1.5	2	1.5	1.5	1.5	-	
Sport Properties										
Shock absorption	EN 14808	≥ 25	%	-	-	P1	P1	P2	P3	
Impact Protection Index (IPI)	AC-P90-205	-	%	-	-	52	76	82	89	
Vertical deformation	EN 14809	≤ 3.5	mm	€2	€2	€ 2	€ 2	€3	€ 3.5	
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	
Ball bounce	EN 12235	≥ 90	%	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90	≥ 90	
Ball speed	ITF	-	-	-	-	-	-	-	-	
Technical Characteristics										
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	
Impact resistance	EN 1517	≥8	N/m	≥8	≥8	≥8	≥8	≥8	>8	
Indentation resistance	EN 1516	≤ 0.5	mm	€ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	
Impact sound insulation	EN 712-2	-	dB	3	-	18	19	20	21	
Classification										
Fire	EN 13501-1	-	-	B _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	
Anti-bacterial activity [E. coli - S. aureus - MRSA] [1]	ISO 22196	-	-		> 99% inhibits growth					
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	-	> 99.3% virucidal activity						
CE Marking										
C€	EN 14 904	-	-	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance Rolling load Resistance						

The proposed specifications fall within the tolerance limits usually accepted in this sector whilst still complying with standards

INSTALLATION ON DAMP SUBFLOOR

Gerflor provides installation on Isolsport (free floating underlay) or Taraflex® Dry-Tex™ System Please contact your sales representative for more information.

^[1] The implementation of an effective cleaning method is the best defence against infection

^{*} For different roll lengths please contact us

Sports Floorings

TO KNOW

		Taraflex® Badminton			Taraflex® Table Tennis		Taraflex®	Taraflex®
Taraflex [®] Tennis	Portable	4.5	7.5	Portable	4.5	6.2	Bateco	Isolsport
-	-	-	D	-	-	-	-	
-	Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	Triple-Action Protecsol®	PUR Protect®	Triple-Action Protecsol®	-	-
D-Max™	100% Pur PVC	100% Pur PVC	D-Max™	100% Pur PVC	100% Pur PVC	D-Max™	-	-
CXP-HD + ™	-	-	CXP-HD™	-	-	CXP-HD+™	-	-
6.2	3.9	4.5	7 .5	3.7	4.5	6.2	1.5	1.65
3.8	1.95	2.6	4.7	1.9	2.6	4.2	2.05	1.35
24 STD	16 STD	20.5 STD	26.5 Max	16 STD	20.5 STD	20.5 STD	30 Max	45 Max
1.5	3 x 2.7	1.5	1.5	1.5	1.5	1.5	1.5	2
P1	-	-	P1	-	-	P1	-	-
52	-	-	76	-	-	52	-	-
€2	€2	€ 2	€2	€ 2	€2	€ 2	-	-
80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	80 to 110	-	-
≥ 90	-	≥ 90	-	-	≥ 90	≥ 90	-	-
Class 5 (Fast)	-	-	-	-	-	-	-	-
≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 350	≤ 300	-
≥8	-	-	≥8	-	-	≥8	-	-
≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
18	-	17	19	-	17	18	-	-
C _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	B _{fl} -s1	C _{fl} -s1	C _{fl} -s1	B _{fl} -s1	C _{fl} -s1
> 99% inhit	oits growth	-	> 99% inhit	oits growth	-	> 99% inhibits growth	-	-
-	> 99.3% virucidal activity	-	> 99.3% viru	cidal activity	-	> 99.3% virucidal activity	-	-
Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Sliding Coefficient Abrasion Resistance	Fire Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire Shock Absorption Sliding Coefficient Abrasion Resistance Rolling load Resistance	Fire	Fire

INNOVATIVE SERVICES

WHAT WILL YOURS BE?

MY TARAFLEX®


CUSTOMISE YOUR SPORT HALL USING THE DIGITAL PRINTING PROCESS

AVAILABLE WITH ALL TARAFLEX® FLOORS*: TARAFLEX® SURFACE, TARAFLEX® PERFORMANCE, TARAFLEX® EVOLUTION, TARAFLEX® COMFORT, TARAFLEX® MULTI-USE

* for more details please contact your local Gerflor representative

Get started on our website: mytaraflex.gerflor.com

BE INSPIRED...

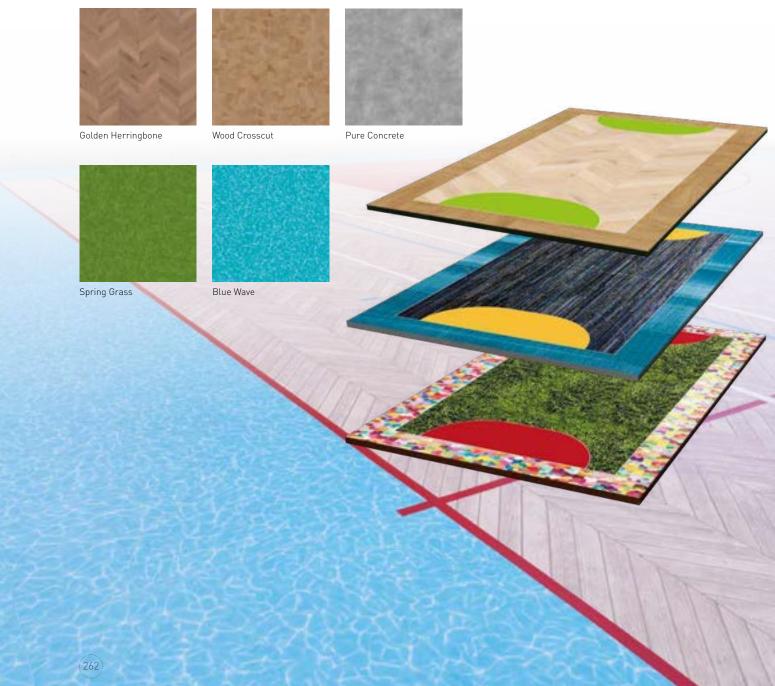

TO MAKE YOUR FLOOR UNIQUE

3D COURT DESIGNER

FOR A 3D VISUALISATION OF YOUR PROJECT



Choose your surface: monosport or multisports



Choose your colours



your sport hall

Available on: courtdesigner.gerflor.com









Thanks to the waterjet cutting technology, **customise your floor** with your city or club colours.

For further information, please contact your local Gerflor representative.

INTERIOR DESIGNER

FOR A REALISTIC VIEW OF YOUR ENVIRONMMENT

- Download your picture and include the floor
- Or change the floor colours in selected pictures







Available on: interiordesigner.gerflor.com



TOP COMPETITIONS TAKE PLACE ON CONNOR SPORTS®

BASKETBALL

- ▶ 2020 Olympic Games (Tokyo)
- ▶ 2019 FIBA World Cup (China)
- ▶ 2016 Olympic Games (Rio)
- NCAA Final Four since 2006 (USA)











CHAMPIONS DESERVE **EXCEPTIONAL SPORT SURFACE**

SO WE SELECT EXCEPTIONAL MAPLE LUMBER FOR THEM

Connor Sports® hand selects north american maple trees grown north of the 35th parallel, where the shorter growing season produces a more dense and uniform woodgrain excellent for sports flooring.



Since its establishment in 1897, the Maple Flooring Manufacturers Association (MFMA) is the authoritative source of technical and general information about maple flooring and related sports flooring systems. Connor Sports[®] is a charter member of the MFMA and the 1st member of that group to be certified by the Rainforest Alliance.



Connor Sports® is proud to be the only ZeroWaste company in the sports flooring industry. Recycling, avoiding waste, developing innovative technology and a strong environmental consciousness are a major part of Connor Sports® corporate policy.



Connor Sports® works with FSC (Forest Stewardship Council®). This organization oversees high conservation value forest and protects the communities and indigenous people that rely on the forest. FSC ensures that everyone delivers the most environmentally friendly product.

CHAMPIONS OF SPORT

HARDWOOD SYSTEMS FOR PROFESSIONAL TEAMS

More than half of the teams in the NBA have purchased a Connor Sports® hardwood system:



















Brooklyn Nets Philadelphia 76ers

Oklahoma City Thunder

Atlanta Hawks

Sacramento

Utah lazz

Milwaukee Bucks



GERFLOR, WHERE CHAMPIONS PLAY™

SHARING MORE THAN SPORT!

BRING PEOPLE TOGETHER FOR UNFORGETTABLE MOMENTS AND LIFETIME MEMORIES

With our modular PowerGame+ tiles, we offer everyone the opportunity to share such memorable sport and recreational experiences.

Our premium surfaces are not only fun, great-looking and safe to play on, but they can also be easily installed in all facilities. You can be sure you're providing the ideal playing outdoor surface for every practice and ambitions, from children to champions.



DESIGNED FOR MULTI-SPORTS

Sport Court® surfaces are designed for a wide variety of sports. All game courts can be easily configured to accomodate basketball, futsal, handball, tennis and more, without compromising on playability or safety.

A number of temporary or permanent applications are possible, from multi-sport school facilities to multi-use game areas to all kinds of sporting events.









SPORT COURT® OUTDOOR SURFACES

266-271

- Gerflor, where champions play	266
- Designed	
for multi-sports	267
- They trust us	268
- Long-lasting aesthetics	268
- Optimal playability	
and safety	269
- Save time and money	270
- Powergame+	
product benefits	271
- A greater court	
with finishing profiles	271

THEY TRUST US

PARTNER OF SPORTS FEDERATIONS

Sport Court® surfaces are used at the highest levels of competition by leading sports federations around the world. Our courts are perfect for both temporary events and permanent installations.

100 000 courts installed since 1974





















LONG-LASTING AESTHETICS

Design a court that makes an impression. With a selection of 10 fade-resistant tile colours, you have more ways to customise the look of your playing surfaces to fit your requirements, whether you want a fun colourful court, or to customise it with your company's or school's colours.

CHOOSE YOUR COLOURS





Powergame+ tiles provide exceptional protection against abrasion, head injuries and joint strain. Extensive third-party testing ensures that athletes of any age remain safe while playing and competing on Sport Court® surfaces.

ACCOMODATE MANY SPORTS WITH UNMATCHED PLAYABILITY AND SAFETY







POWERGAME+ ENHANCES GAME EXPERIENCE

- Highly versatile multisport surface
- Same dribbling response as a hardwood flooring
- Remarkably stable surface

POWERGAME+ PROVIDES A UNIQUE BALANCE BETWEEN SAFETY, COMFORT AND DURABILITY


- High tile stability optimises ball rebound and game performance
- Improved water drainage enables faster drying and playability after rain
- Low skin abrasion protects players when falling without compromising on traction



SUPERIOR IMPACT PROTECTION

A head impact from just 10 cm above a concrete surface can cause a concussion. Sport Court® tiles are significantly more forgiving, with PowerGame+ reducing the likelihood of a serious head injury from a fall of 50 cm

Critical Fall Height is a test used in conjunction with the European Standards EN 1177-2018, used for evaluating playground surfaces, such as sand, wood chips, resilient rubber and asphalt.

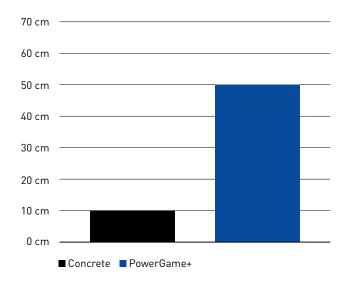

Sports Flooring

SAVE TIME AND MONEY

EASY INSTALLATION AND MAINTENANCE


THE SIMPLE AND STRONG INTERLOCKING SYSTEM ENABLES THE INSTALLATION OF A 1,000 SQM COURT IN 4H





WITH A 4-PERSON TEAM



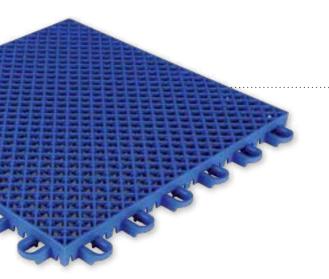



THE NEXT STEP IN MULTI-SPORTS OUTDOOR SURFACING

Designed to provide the highest levels of safety and playability. PowerGame+ is the perfect choice for your facility.



LONG-LASTING AESTHETICS



UV PROTECTION

OUTSTANDING COLOUR DURABILITY

EXTREME DURABILITY



WIDE AND DEEP CONNECTION LOOPS

HIGH STABILITY AND DURABILITY OVER INSTALLATION AND REMOVAL, SAFETY OF THE PLAYERS

OPTIMAL PLAYABILITY

OPTIMAL GRID DESIGN

DOUBLE-GRID STRUCTURE FOR FASTER DRYING, REDUCED WATER REBOUND, AND OPTIMAL SAFETY




TOP-GRID: "OPEN DIAMOND" DESIGN FOR BETTER DRAINAGE



LOWER GRID: "SADDLE" SHAPE TO PREVENT WATER RETENTION

A GREATER COURT WITH FINISHING PROFILES

Discover our complete range of finishing profiles, adapted to every court configuration.

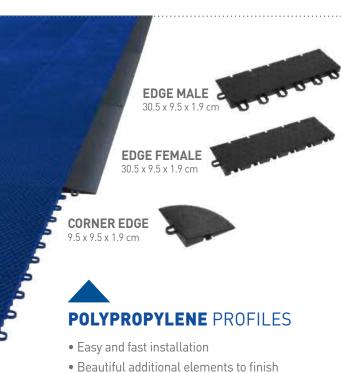

 Beautiful additional elements to finish the court

CORNER OF RAMP EDGES

Finishing angle to be associated with ramp edges. 148 x 18.2 x 2 cm

RAMP EDGE

Finishing solution for courts installed over a flat support. $148 \times 18.2 \times 2 \text{ cm}$

FLAT THRESHOLD

Finishing solution for courts integrated into a support to have a flat transition. $148 \times 15 \times 0.3$ cm

SKIRTING

Finishing solution for courts surrounded by an infrastructure (wall, gates...).
148 x 10 x 10 cm



METAL PROFILES

- Resistance to harsh weather conditions and to vandalism thanks to the anchored installation
- Beautiful additional elements to finish the court, in every possible configuration






DLW LINOLEUM SPORTS FLOORINGS 272-277

- Linodur Sport	276
- Colorette Sport	276
- Marmorette Sport	277

LINOLEUM SPORT


COLORETTE SPORT / LINODUR SPORT / MARMORETTE SPORT

COLORETTE SPORT

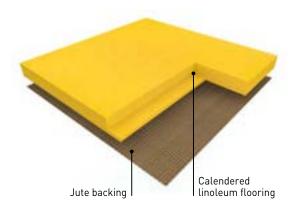


COLORETTE SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide, compatible with Gymflex II rubber underlay for a point elastic installation. Its weight is 4700 gr/sqm in 4.0 mm. It features a speckled design. It is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

LINODUR SPORT _____

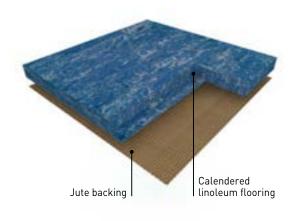

LINODUR SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide, compatible with Gymflex II rubber underlay for a point elastic installation. Its weight is 4700 gr/sqm in 4.0 mm. It features a moiré design. It is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

MARMORETTE SPORT

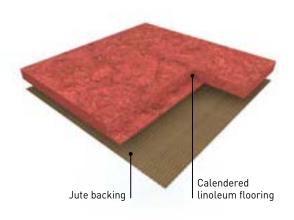

MARMORETTE SPORT is a calendered linoleum compact floorcovering in sheet, 2 m wide. Its weight is 3800 gr/sqm in 3.2 mm. It features a marbled design. It is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among which 76% are rapidly renewable. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions). Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the flooring is certified "Cradle to Cradle Silver". Its Environmental Performance Declaration (EPD) certified by an external laboratory, indicates carbon neutrality during the first stages of its life cycle ("from cradle to gate").

COLORETTE SPORT / LINODUR SPORT / MARMORETTE SPORT





			COLORETTE SPORT	LINODUR SPORT	MARMORETTE SPOR
DESCRIPTION					
Total thickness	EN ISO 24346	mm	4.0	4.0	3.2
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	4700	4700	3800
Width of sheet	EN ISO 24341	cm	200	200	200
Length of sheet	EN ISO 24341	m	арр. 28	арр. 28	арр. 28
CLASSIFICATION					
Norm / Product specification	-	-	EN 14904 / DIN 18032-2	EN 14904 / DIN 18032-2	EN 14904 / DIN 18032-2
European classification	EN ISO 10874	class	23 / 34 / 43	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	C _f l-s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾	C _{fl} -s1 ⁽¹⁾
Dynamic friction coefficient	DIN 18032-2	-	0.4 - 0.6 μ - Fulfilled	0.4 - 0.6 μ - Fulfilled	0.4 - 0.6 μ - Fulfilled
Friction	EN 14904	-	80-110 - Fulfilled	80-110 - Fulfilled	80-110 - Fulfilled
Impact sound insulation	EN ISO 717-2	dB	6 dB	6 dB	6 dB
PERFORMANCES					
Residual indentation	EN ISO 24343-1	mm	≤ 0.20	≤ 0.20	≤ 0.15
Colour fastness	EN ISO 105 - B02	degree	6	6	6
Light reflexion	DIN 5036-3	-	p ≥ 0.20 fulfilled (excepted colours 0004 and 0080)	p ≥ 0.20 fulfilled (excepted colours 0024 and 0081)	p ≥ 0.20 fulfilled
Static electrical propensity	EN 1815	kV	app. 2.0	app. 2.0	app. 2.0
Castor chair test (Type W)	ISO 4918	-	0K	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.023	0.023	0.018
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17	0.17
Chemical products resistance	EN ISO 26987	class	Resistance to fat and mir	neral oil and short term resist	ance against diluted acids
CE MARKING					
((EN 4/00/ 000/	-			
CE	EN 14904: 2006	-			


(1) Glued according to certificate. DOP numbers available from your local branch.



Depending on light exposure, the product color can vary, due to linoleum natural oxidization process. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

LINOLEUM SPORT

LINODUR SPORT 1048 Country Beige 1074 Straw Yellow 1036 Smooth Green 1049 Cliff Grey 1072 Peach Orange 1011 Avocado Green 1056 Marble Grey 1026 Lagoon 1059 Slate Grey 1073 Glowing Rock 1057 Heaven Blue 1081 Sporty Black 1013 Lava Red 1020 Spring Blue 1024 Speckled Blue

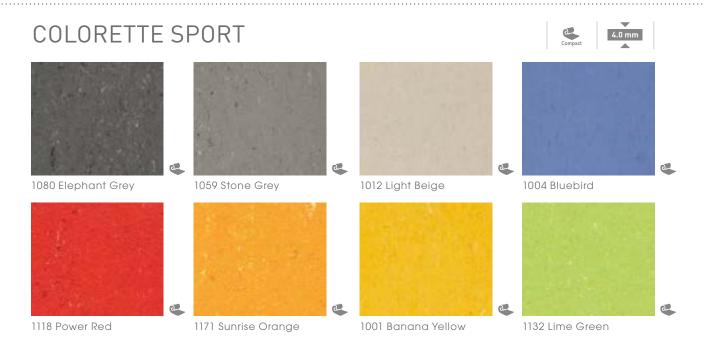

MARMORETTE SPORT















1076 Pale Yellow


1070 Rocky Brown

1172 Papaya Orange

1048 Cranberry Red







1053 Ice Grey

1050 Quartz Grey

1132 Lime Green


1026 Sky Blue

LINOGYM II - 10 mm

Ideally suited for kindergardens. With a 26% impact absorption rate, LINOGYM II SYSTEM provides outstanding cushioning qualities.

THE LINOGYM II SYSTEM – point-elastic flooring!

LINOGYM II SYSTEM brings together the best of Sport Linoleum and elastic matting. It consists of the 6 mm elastic matting Gymflex II on which a 4 mm Sports Linoleum (Linodur or Colorette) will be installed. With a 26% impact absorption rate, **LINOGYM II SYSTEM** provides outstanding cushioning qualities. The elastic matting is made of PUR foam, rubber powder and binder.

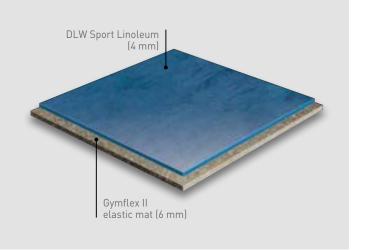



POWERSHOCK 80

CARDIO & FREE-WEIGHT ZONE


8 MM INTERLOCKING TILES WITH DOVETAIL EDGES



POWERSHOCK 80 is:


- ✓ Highly durable
- ✓ Easy to clean and maintain
- ✓ Highly resistant to static loads and to dumbbells thanks to the vulcanization process of this 8 mm vulcanized rubber.

Vulcanized rubber is a chemical process through high pressure and temperature enables the sulfur atoms to form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber.



DARK GREY

BLACK

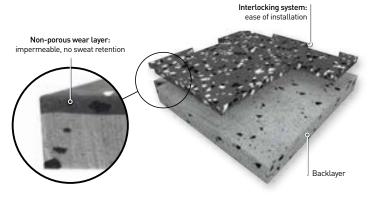

ACCESSORIES (available from Romus)



Aluminium reducer Unit: 3 lm



30 MM

TILES WITH PRE-INSTALLED

Multilevel coverstrip Unit: 2.7 lm

POWERSHOCK 300

CROSSFIT & HEAVY-WEIGHT AREA


POWERSHOCK 300

avoids deep-impact damage while providing an outstanding sound deadening, as well as:


- ✓ high shock absorption
- ✓ sound insulation of 24 dB
- ✓ great protection of the subfloor being a 30 mm high impact rubber.




DARK GREY

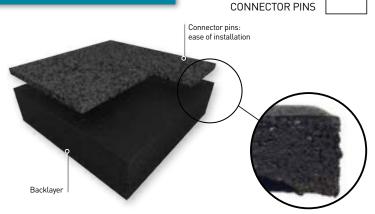

ACCESSORIES



Ramp edge rubber 30 mm 1 lm



Corner ramp edge rubber 30 mm 2 units (1000 x 250 mm)

POWERSHOCK					
80	300				
CARDIO & FREE-WEIGHT AREA	CROSSFIT & HEAVY-WEIGHT AREA				

DESCRIPTION


Thickness	NF EN ISO 24346	mm	8	30 (± 2)
Weight	NF EN ISO 23997	kg/tile	11.9	6.8 (± 0.2)
Size	NF EN ISO 24342	mm	980 x 980 (incl. dovetails)	500 x 500 (± 0.8%)

CLASSIFICATION

Fire resistance	EN 13501-1	class	B _{fl} ,s1	C _{fl} ,s1
VOC	ISO 16000-6	class	A+	A+

PERFORMANCE


Dimensional stability	NF EN ISO 23999	%	< 0.3	< 0.1
Abrasion	EN ISO 5470-1	g	< 0.5	1.5
Light resistance	EN ISO 20105 - B02	level	4	3
Indentation resistance	EN 1516	mm	< 0.1	0.12
Slip resistance in dry condition	EN 13036-4	unit	80-110	80-110
Sound insulation	EN ISO 717/2	dB	13	24
Hardness shore A	Int.	-	> 75	60

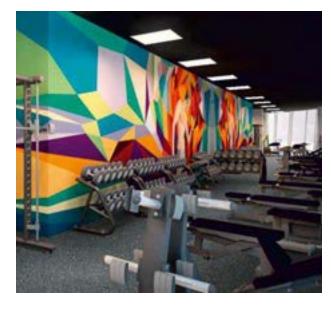



OUR SOLUTIONS FOR YOUR FITNESS CENTER

Each zone in your club has different constraints and requirements; we have solutions for each one of them.

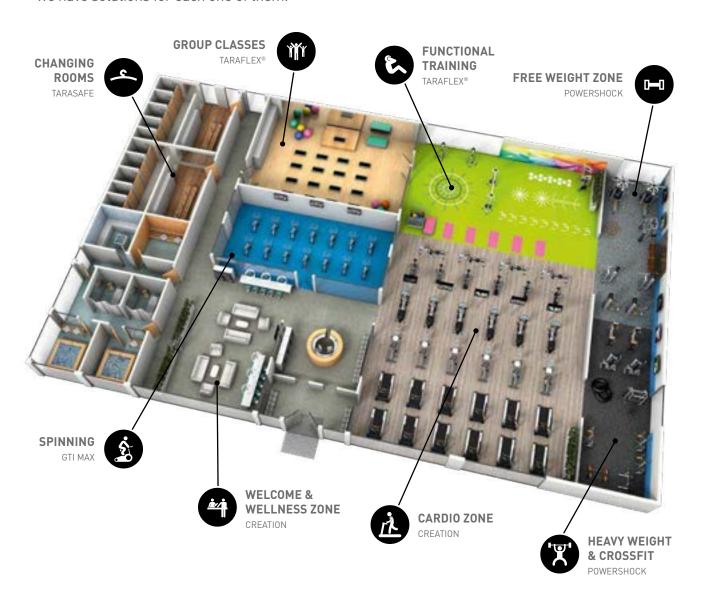









FUNCTIONAL TRAINING

SPINNING ZONE







CARDIO ZONE GROUP CLASSES

WEIGHTLIFTING ZONE





Finishes	284-297
Technical Solutions	.298-307
Sports Finishes	308-313


FINISHES

Skirting solutions	285-289
Stair solutions	290-291
Profile solutions	292-294
Welding solutions	295
Entrance solutions	296-297

Gerflor provides a complete range of solutions including skirting, stairs, profiles and welds.



SKIRTING AND COVING SOLUTIONS

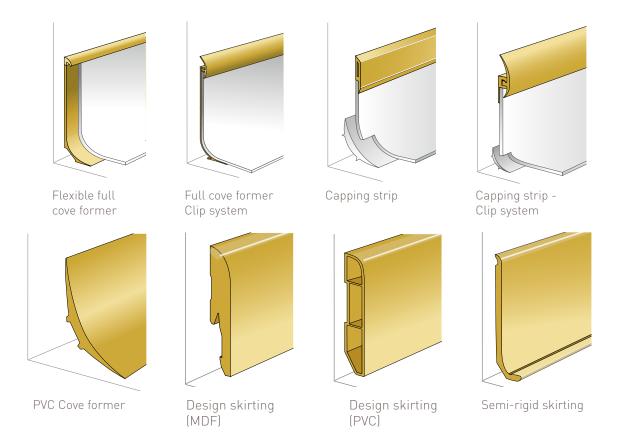


There are two ways of finishing the junction between the floor and wall:

Installing the PVC covering up to the edge of the wall and using a skirting insert.


This is cost effective and time saving.






Making a cove.
This solution makes it easier to clean inside angles and edges.
It gives a waterproof connection wall/floor covering.






COVING SOLUTIONS

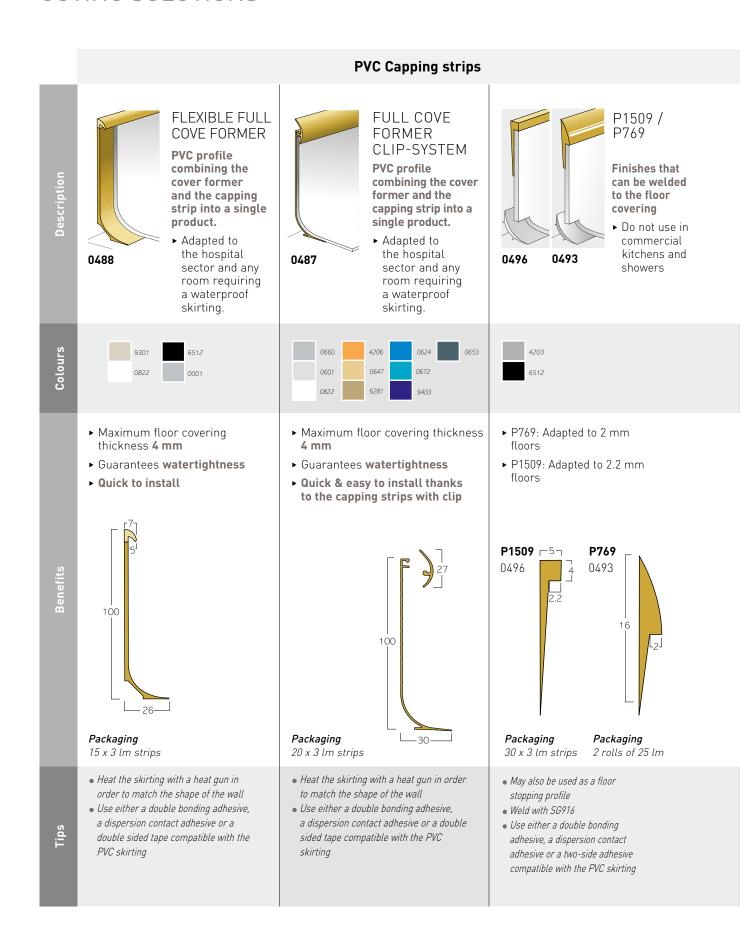

COVING SOLUTIONS


PVC Capping strips



CAPPING **STRIPS**

Rigid capping strip with flexible lip


► Do not use in commercial kitchens and showers



CAPPING STRIP CLIP SYSTEM

Rigid clipped finishing profile with 2 flexible lips

► Capping strip that covers the skirting



PVC COVE **FORMER**

This accessory allows the floor-wall cove to be formed


4011 - 4012 - 4014






0647 0672 6281 0822 9403

4206



- ► Maximum covering thickness: 4 mm
- ► Hygienic
- ► Easy to install
- ► Maximum floor covering thickness: 4 mm
- ► Good watertightseal for finishing floor-wall coves and floor-wall systems notably in industrial
- ► Easy to install thanks to the clip system
- ▶ Its rounded shape makes it easier to clean the floor-wall junction ► Gives a better look
- ► Limits the risk of piercing the floor covering
- ▶ Prevents accumulation of dirt and bacteria




Packaging 25 x 3 lm strips

- Slightly heat the strip if it whitens once
- Use a miter shear for a perfect cut
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting



Packaging 20 x 3 lm strips


- Heat the profile with a heat gun (temperature about 150°C) for the installation of the external corners
- Use a miter shear for a perfect cut
- Use SG916 for a perfect finish of the internal
- Slighthy heat the profile if it whitens once installed
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting



• Use a mitre shear for a perfect cut

Colours and images are not contractual.

SKIRTINGS

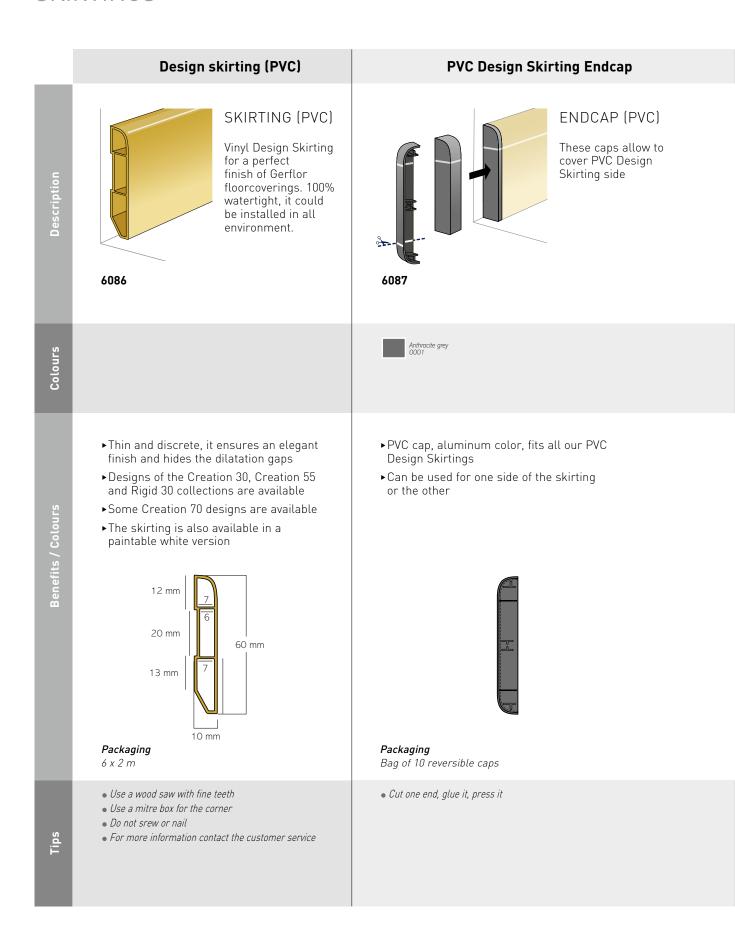

Design skirting (MDF)

GLUE DOWN INTERLOCKING Or

SKIRTING (MDF)

MDF Design Skirting for a perfect finish of Gerflor floorcoverings.

5947


Semi-rigid skirting



0483 - 0482 - 0477



- ► Available in all designs of Creation 30, Creation 55, Top Silence and Rigid collection
- ▶Some Creation 70 designs are available
- ►It ensures an elegant finish and hides the dilatation gaps
- ►The skirting is also available in a paintable white version




Packaging

5947: 5 x 2.2 m 5948: 1 box of 30 clips

- Use a wood saw with fine teeth
- Use a mitre box for the corner
- For more information contact the customer service

- ►Solid colour
- ▶ Resistant to washing waters



Packaging

0483 / 0477: 25 x 3 lm strips 0482: 32 x 3 lm strips

- Use skirting corner Cutter to handle internal and external angles
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

Colours and images are not contractual.


STAIR SOLUTIONS

Gerflor has developed 2 solutions for installing a Vinyl floor on stairs to complement its range of floors:

1 Tarastep

- ► Install the base of the finishing clip onto the flat angle of the stair
- ► Install the Tarastep
- ► Clip the stair clip system


Adapted to rounded stair nosing.
Mill the angle for straight stair nosing.
For bird's beak stair nosing, fill the void beforehand.



2 Stair nosing insert

- ► Install the vinyl flooring and the stair nosing by starting at the bottom of the stair
- ► Install the riser
- ► Install the stair nosing
- ► Install the flat of the stair
- ► Weld

Adapted to straight stair nosing, rounded stair nosing and bird's beak stair nosing.

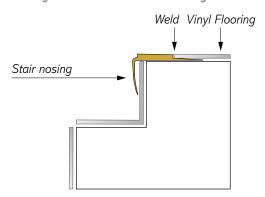


ALUMINIUM STAIR NOSING T67 ALU Landing/stair harmony Guarantees floor covering durability

► For a state-of-the-art stair finish

0001

► Delivered with a black strip made out of carborandum for an improved anti-sliping action of the stair nosing

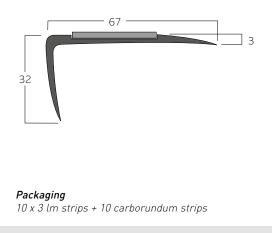

• Secure with flat head cross head countersunk stainless steel screws (not included)

i

STAIR SOLUTIONS

Stair nosing insert

0424 - 0462 - 0461

GROOVED PVC STAIR NOSING

T49/4R - T49/3R - T49/2R



GROOVED PVC STAIR NOSING

T27/3R

Rounded angles and bird's beak

- Straight angles
 - ► Grooves provide anti-slip protection
 - ► Landing/Stair harmony
 - ► Ensures floor covering durability










T49/4R - T49/3R - T49/2R

- ▶ Adapted to 2, 3 or 4 mm floor covering
- ► Weldable


T49/2R - 0461

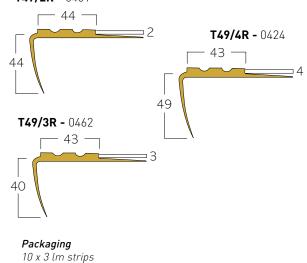

T27/3R

- ► Adapted to 3 mm floor covering
- ► Weldable

T27/3R - 0467




Packaging 10 x 3 lm strips

- Do not apply adhesive to the vertical part of the stair nosing
- Double bonding


Colours and images are not contractual.

PROFILE SOLUTIONS


Our profiles provide solutions to several problems concerning links between floors, walls or bare spots depending on the flooring thickness and technical requirements.

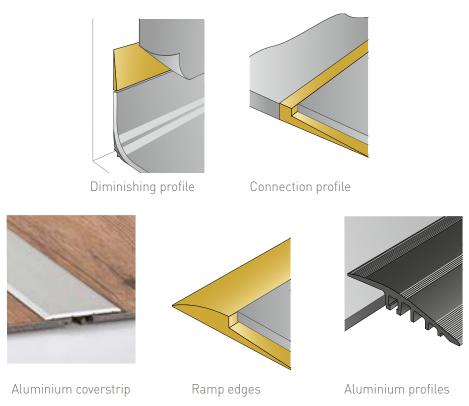

They in particular, allow two types of connections to be dealt with:

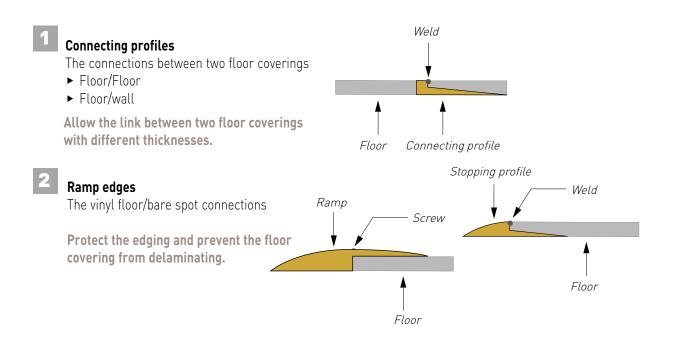

ALUMINIUM RAMP EDGES

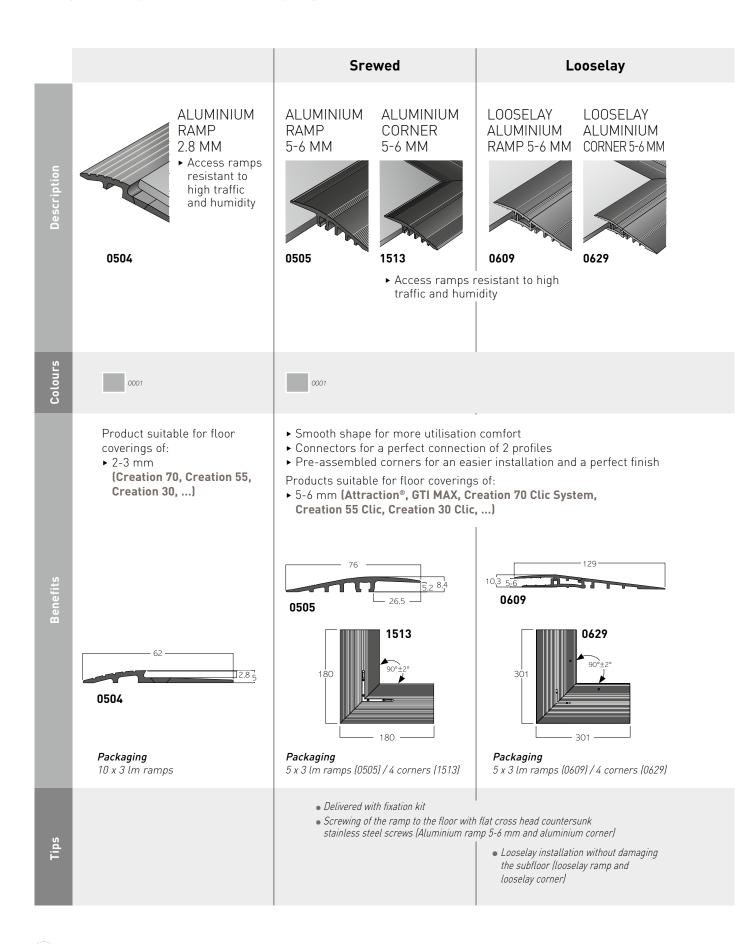

• For a better weld the correct grooving should be performed.

• Use an adapted nozzle (Ultra Speed Nozzle).

Colours and images are not contractual.

ENTRANCE SOLUTIONS

Three cleaning zones to be covered at the entrance to a building

Each zone has a specific "cleaning" role:



ZONE 1 ZONE 2 ZONE 3 RIBBED RUBBER INSERT **TEXTILE INSERT DIRT-TRAPPING MAT** Romat Romat Ronet 妣 쐤 쐤 Frequent traffic (500 p/day) Frequent traffic (500 p/day) Frequent traffic (500 p/day) Romat GT Romat GT Roclean ******* ******* 쐤 Heavy traffic (500 to 2,000 p/day) Heavy traffic (500 to 2,000 p/day) Heavy traffic (> 500 p/day) XXXX Intensive traffic (> 2,000 p/day) RUBBER GRATE INSERT

Intensive traffic (> 2,000 p/day)

XXXX

ishes

ENTRANCE MATS

- ► Eliminate dust, moisture and other residue from visitors' feet as efficiently as possible at the entrance to a building
- ▶ Prevent premature soiling and wear of floor coverings.

QUICKMAT TILES



Modular entrance mat that can be incrustated in Gerflor LVT floor covering without damaging the subfloor.

It helps to scratch the underside of shoes and protects the building from outside dirts.

For areas with frequent pedestrian traffic (up to 2000 people per day).

► Packaging: 1 sqm box

QUICKMAT TILES

Ref. 1725 - 23 x 75 cm planks

QUICKMAT PROFILES

Ref. 1726 (tube of 4x2 lm profiles)

QUICKMAT TILE ANGLES

Ref. 1727 (box of 4 angles)

LOOSELAY ROMAT GT - INSERT KIT



Ref. 1719 - 1.5 x 1 m

For pedestrian traffic only.

Entrance mat affording floors of buildings efficient and sustainable protection from pedestrian traffic by forming a barrier to outside dirt. Thanks to its loose-lay installation, the mat can be installed without damaging the surface. Adapted for an important pedestrian traffic (up to 2000 people per day).

This kit contains:

- ▶ 1 mat
- ▶ 4 frames composed of 4 lower and 4 upper profiles
- ▶ 4 external pre-assembled corners
- ▶ 60 5-7 screws
- ▶ 1 Installation guideline

KIT ESPLANADE 9000



Ref. 1700 - 1.5 x 1.5 m

Kit for the incrustation of an ESPLANADE 9000 mat in an area covered with Attraction®, GTI, Creation 55 Clic, Creation 70 Clic. The closed conception of the mat enable to scratch the underside of shoes and increase the durability of the floors. It resists to intense pedestian traffic (up to 5000/day) and to mecanial traffic.

► Packaging: 2.5 sqm kit: 3 mats modules, 4 upper and 4 lower profiles, screws.

TECHNICAL SOLUTIONS

Shower system	299
Accessibility	300-301
LVT Underlayers	302-303
Specific products	304-305
Isolating membranesESD copper stripProtection	305 305 305
Adhesives and tapes	306-307


Gerflor offers a full range of technical solutions such as the shower system, copper strips, adhesives or tools in order to provide all the technical requirements on site.



SHOWER SYSTEM

A complete floor and wall solution with a choice of two floor coverings, one wall covering and seven accessories.


- Safety: Grained floor covering with slip resistance (Elegance SD, Tarasafe Ultra H₂O, Standard, Geo, Ultra Compact)
- Watertight system floor/wall junction
- System which guarantees hygiene
- Combination of colours: 31 wall references and 16 floor references
- Access for all



Cove former for internal wall angles CA 12 - H204




Perfect CR 41 wall weld -H231




Diminishing profile - 0490



Clean Corner System IN



Clean Corner System OUT



Cove former 4011



Tarafoam: acoustic insulation sublayer - 997C




PVC drain with inox grid -



Drains - H112 / H113 SITAR / SITAR V




Shower threshold - 0469



gris beige clair bleu

TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS - ACCESSIBILITY

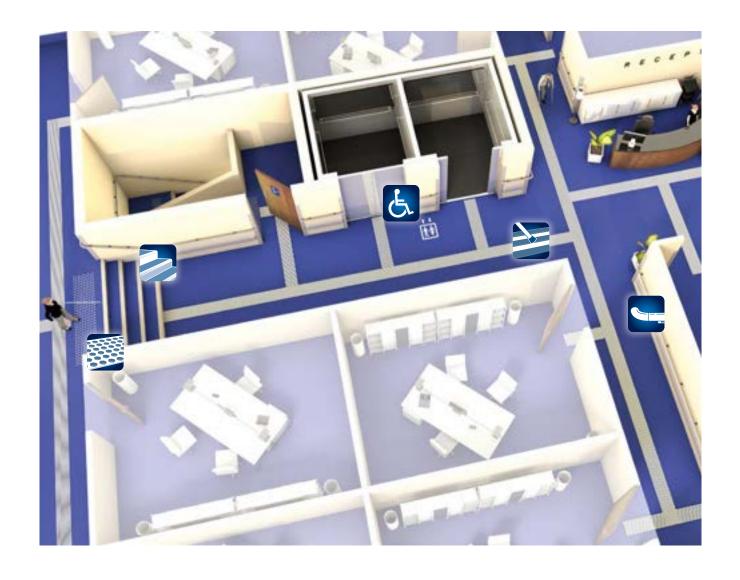


SPECIFIC PRODUCTS - ACCESSIBILITY



Warning Surfaces

ALERTILE, self-adhesive or weldable tactile slab

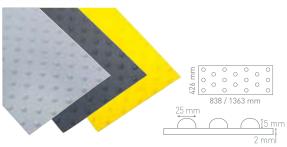

Dimensions: 426 x 1363 mm / 426 x 838 mm Packaging: 8 units per box (838 mm) 4 units per box (1363 mm) Codes: 058B (838mm) / 058A (1363mm)




Packaging: Kit of 198 studs (6 planks de 33 studs) approx. 1.3 m x 0.4 m Codes: 059C (Grey, Black) - 059D (Alu)



EASYGUIDE, the self-adhesive solution for guiding





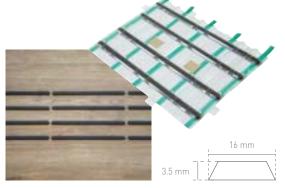

Packaging: Box of 6 slabs 300 x 220 mm (4 bars/slab) for 1.8 m of guideline



Signage

Personalised cut-to-size system





UNDERLAYERS FOR LVT COLLECTIONS

Creation 30/55/70 CLIC Creation 30/55 CLIC GERFLOR ACOUSTIC 15 dB GERFLOR SILENCE PLUS 19 dB ► Sound absorption underlay in roll ► Sound absorption underlay in accordion **ALU TAPE ♣** ALU TAPE 5050 5050 ► Reduces impact noise up to 15 dB ► Reduces impact noise up to 19 dB ► Adapted to all traffic types ► Adapted to medium traffic ► Thickness: 0.93 mm ► Thickness: 1.5 mm Packaging Packaging $1798 - 1 \times 15 \text{ lm} = 15 \text{ sqm}$ $5949 - 1.18 \times 8.5 \, \text{lm} = 10 \, \text{sqm}$ 5050 - 7.5 cm x 25 lm 5050 - 7.5 cm x 25 lm: 1 Alu Tape roll for 3 boxes Consumption: 1 Alu Tape roll for 2 rolls of underlayer of underlayer • Underlay is rolled on reverse Printed side on top • Use Alu Tape to connect 2 rolls • Use Alu Tape to connect 2 bands

• Refer to technical installation guidelines to check

the approved product

• Refer to technical installation guidelines to check

the approved product

Creation 30/55

GERFLOR SMART FIX 16 dB



1698

- ► Underlay with self-adhesive surface
- ► Sound absorption underlay in roll
- ▶ For a loose lay installation of LVT dry back.
- ► Reduces impact noise up to 16 dB
- ► Adapted to **all traffic** types
- ► Thickness: 2 mm

Packaging 1 x 7.5 lm = 7.5 sqm

- Fleece side: on the subfloor
- Adhesived side: under the LVT
- Refer to technical installation guidelines to check the approved product




TECHNICAL SOLUTIONS

SPECIFIC PRODUCTS


Gerflor provides a set of products providing solutions to specific problems such as accessibility, insulation, maintenance of floors and electrical conductivity of our floors.



Isolating membranes

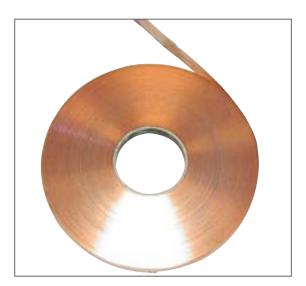

ESD copper strip

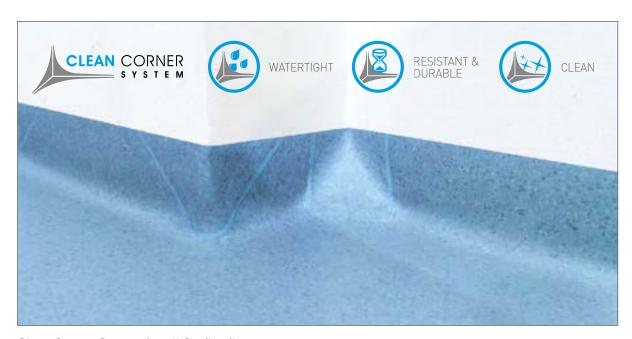

Clean Corner System for all Gerflor floors

SPECIFIC PRODUCTS

Isolsport	Tarafoam	Protection	Copper strip
VINYL ISOLATING MEMBRANE 0829 0002 Specially designed for sports For installation on concrete subfloors	COMFORT VERSION OF THE SHOWER SYSTEM 997C 6792	FLOOR PROTECTION 058X 0001 Preserve the floors laid down until the site is delivered	ESD COPPER STRIP 0586 0001 Copper strip enabling earthing
 Vinyl isolating membrane, double side on non wowen glass fibre with backing design made up of 3-branch star foam pads. Its design enables loose laying on sensitive subfloors (risks of humidity, coated, etc.) when it is associated with a Taraflex® sporting floor. The raised effect allows humidity to circulate. Thickness: 1.7 mm 	 Provides acoustic insulation for the shower system (15 dB) and comfort under foot. Thickness: 2 mm 	 ► Effective protection against scratches, stains, slip and other external stresses. ► Good hold on the floor for a safe use ► Reusable 	 ▶ For electro-conductive floor coverings such as Elegance EL5, Technic EL5, GTI EL5, Affinity EL7, Robust EL7 ▶ Width 10 mm, thickness 0.08 mm
Packaging 1 x 45 lm roll	Packaging Roll of 2 m x 20 lm - 40 m ²	Packaging Roll of 1 x 50 lm - 50 m²	Packaging 1 x 200 lm roll
 Bond well at doors with PU adhesive to prevent delamination. Keep the raised surface, floor side, on the periphery Edge to edge installation Bond vinyl floors with Gertec adhesive 	 Levels out around the edge of the room Acrylic bonding Edge to edge installation 		 Prevent discontinuity between the angles by folding it back onto itself Colours and images are not contractual.
	VINYL ISOLATING MEMBRANE 0829 0002 Specially designed for sports For installation on concrete subfloors • Vinyl isolating membrane, double side on non wowen glass fibre with backing design made up of 3-branch star foam pads. • Its design enables loose laying on sensitive subfloors (risks of humidity, coated, etc.) when it is associated with a Taraflex® sporting floor. The raised effect allows humidity to circulate. • Thickness: 1.7 mm Packaging 1 x 45 lm roll • Bond well at doors with PU adhesive to prevent delamination. • Keep the raised surface, floor side, on the periphery • Edge to edge installation	VINYL ISOLATING MEMBRANE OB29 0002 Specially designed for sports For installation on concrete subfloors Por installation on concrete subfloors Note: The shower system of the shower system of 3-branch star foam pads. Its design enables loose laying on sensitive subfloors (risks of humidity, coated, etc.) when it is associated with a Taraflex® sporting floor. The raised effect allows humidity to circulate. Thickness: 1.7 mm Packaging 1 x 45 lm roll Bond well at doors with PU adhesive to prevent delamination. Keep the raised surface, floor side, on the periphery effect of the room Acrylic bonding Edge to edge installation Bond vinyl floors with Gertec	VINYL ISOLATING MEMBRANE OF THE SHOWER SYSTEM Preserve the floors laid down until the site is delivered • Vinyl isolating membrane, double side on non wowen glass fibre with backing design made backing design made up of 3-branch star foam pads. • Its design enables lose laying on sensitive subfloors lirisks of humidity, coated, etc.] when it is associated with a Taraflex® sporting floor. The raised effect allows humidity to circulate. • Thickness: 1.7 mm Packaging

ADHESIVES AND TAPES

Gerflor has developed specific bonding solutions to make it easier to install its products.

Adhesives

GERPUR M

Mana Carlot

086C 0083

Specially designed for sports

Only for Dry Tex™ System (bonding of Taraflex sport floors with non-woven backing)

GERTEC



0991 0991

Application on floors with old vinyl floor covering for renovation or on Isolsport

GERFIX SUPER E 120



0973 0973

Apply on a hydraulic base or resurfacing

- ► Bonding on new and old humid concrete subfloor
- Mono component PU adhesive, reactive to humidity which enables the DTX material to be fully bonded in humid environment (no restriction of humidity levels with the exception of surface water)
- ► Consumption: 400 to 450 g/m²

- ► Acrylic adhesive
- ► Adapted to Isolsport and other sport floors
- ► Consumption: 150 to 200 g/m²
- ► Acrylic adhesive
- ► Consumption: 300 to 350 g/m²

Packaging 15 kg bucket

• To be applied with ergonomic trowel for rigid adhesive and B1 blade

Packaging 20 kg bucket

• To be applied with a stiff aluminium trowel and blade A4 Standard TKB

Packaging 20 kg bucket

• To be applied with a stiff aluminium trowel and blade A2 Standard TKB

Tips

ADHESIVES AND TAPES

Hook & loop and double sided tape for textile backing	Non-migrating do	puble sided tapes
D75	FIX&FREE 100	FIX&FREE 740
0534 0001	058U 0001	058W 0001
Width: 75 mm	Width: 100 mm	Width: 740 mm
 D75 enables installation of vinyl floor coverings with textile backing on the perimeter and under joints. Time saving and cleanliness by comparison with a bonded system. No gumming time and no smell. 	 New double-sided tapes in order floorcovering easily, without dama particularly useful for "ephemera renovation of subfloor containing Fix&Free 100 is suitable for textil Fix&Free 740 is suitable for Creat Time saving and cleanliness by co No gumming time and no smell. 	aging the subfloor. This is l areas" (in retail for instance) of for asbestos. e backing floorcovering. tion Clic and GTI.
Packaging 1 x 25 lm roll	Packaging 1 x 50 lm roll	Packaging 1 x 25 lm roll

SPORT FINISHES

Marking309
Specific Products310-311
Adhesives and tapes312
Tools 313

We provide finishing solutions suitable for sports floor coverings such as permanent or temporary line marking solutions.





MARKING



Permanent Game Lines (paint)

DESCRIPTION	ARTICLE CODE	COMPONENTS
KIT TLD AQUA BASKET	085V0001	4 red paint's can, 4 hardener's can, 9 adhesive tapes and 1 roller
KIT TLD AQUA BADMINTON	085W0001	3 black paint's can, 3 hardener's can, 7 adhesive tapes and 1 roller
KIT TLD AQUA TENNIS	085X0001	3 white paint's can, 3 hardener's can, 7 adhesive tapes and 1 roller
KIT TLD AQUA HANDBALL	085Y0001	4 yellow paint's can, 4 hardener's can, 9 adhesive tapes and 1 roller
KIT TLD AQUA VOLLEY	085Z0001	2 blue paint's can, 2 hardener's can, 3 adhesive tapes and 1 roller

Temporary Game Lines (tape)

DESCRIPTION	ARTICLE CODE	USE
3 M TAPES BLACK (**)	H1970002	For game lines
3 M TAPES WHITE (**)	H1970004 (*)	For game lines - White = Tennis
3 M TAPES RED (**)	H1970005	For game lines - Red = Basket
3M TAPES BLUE (**)	H1970006	For game lines - Blue = Volley

Game Line Equipment (Permanent & Temporary)

DESCRIPTION	ARTICLE CODE	USE
GAME LINE MARKING DEVICE	087W0001	Circular line marking of up 9 m radius can be achieved with this device.
GAME LINE MARKING DEVICE AND CIRCLE CUTTER	087X0001	COMPONENTS Marking head with 50 mm adhesive marking tape Marking head with 19 mm protective tape Extension poles Pole-connections Centre-part with 2 suctions cups Sheet metal guides for straight lines Transporting case ABS Case for extension poles Circle cutter (optional for only 087X0001)

(*)White color can be used for any other monosport court. (**)To be installed on Taraflex® Range except on canvas or tennis embossing.



Game Line Marking Device



Circle Cutter

SPECIFIC PRODUCTS: ISOLATING MEMBRANE & CLEANING DETERGENTS

Bateco Sport floor maintenance **PROTECTIVE** TRACIFLEX **SURFACE** Specially designed for sports 085P 0001 H3756801 (customized lengths) HM126801 (standard lengths at 20 lm) HM066801 (standard lengths at 30 lm) ► Multipurpose detergent for cleaning the vinyl sport floors (shoe marks and contact Suitable for gymnasium / marks) reception hall versatility ▶ Also suitable for floors which are difficult to clean ► For daily or weekly maintenance ▶ Protective surface made from black ▶ Removes resin from Handball courts calendered and grained plasticised vinyl. ▶ Recommended in sport room ► Taraflex Bateco is especially designed to protect sport floors in the event of nonsports use of the room. It prevents marking by chairs, tables, heels on the sport floor. ► Thickness: 1.5 mm Packaging 1 x 20 lm roll / 1 x 30 lm roll 1 l can • Edge to edge installation • Traciflex may be sprayed on stubborn stains • Strips can be secured with single-sided adhesive tape AT7 Tips

SPECIFIC PRODUCTS: CLEANING DETERGENTS

Sport floor maintenance





TANEX TROPHY



SPRAY **TARACLEAN**

085E 0001

- ► Multipurpose detergent for cleaning the vinyl sport floors (shoe marks and contact marks)
- ► Also suitable for floors which are difficult to clean
- ► For weekly maintenance

085A 0010

► Spray cleaner to remove occasional and tough stains, notably resin marks

- ► For all sport floors

- ► Suited to all types of floors treated with Protecsol®
- ► Easy and quick to use

Packaging 5 l can

Packaging Box of 12 pieces

Colours and images are not contractual.

ADHESIVES AND TAPES

Double sided tapes for sport floors

D200 / D300

AT7

H208 0007 / 085R 0001

D200: Special double-sided tape for wood floors

D300: Special double -sided tape for concrete

Width: 100 mm

Width: 100 mm

Single-side tape

H206 0001

- ► Adapted to temporary installation on wood floors or concrete
- ► Requires a test on site for validation

▶ Black

▶ Bonds without leaving marks, non migrating

Holds strips:

- 1. During non sportive events
- 2. Enables the material to be secured on the tube at the time of winding
- 3. Holds strips during the storage time

0.1 x 50 lm roll (100 mm x 50 m) Packaging

0.1 x 33 lm roll (100 mm x 33 m)

Packaging



- Double side tape reel
- Unroller for double sided tapes H372001



Required material: AT7 tape reel Unroller for single sided tapes H367 0003



Refer to the product glossary for information on colours and packaging

-inishes


TOOLS - SPORT

Storage equipment

DESCRIPTION	ARTICLE CODE	USE
NAIROD PALLET (brand new)	087Q0057	For transportation and storage
NAIROD PALLET (2 nd hand)	087Q0057	of mobile court (160 x 120 x 180)

DESCRIPTION	ARTICLE CODE	USE
SERVING TROLLEY Portable floors	087A0035	
SERVING TROLLEY Bateco	088F0001	To wind and unwind Bateco or portable floors
UNWINDING TROLLEY Bateco	088D0001	



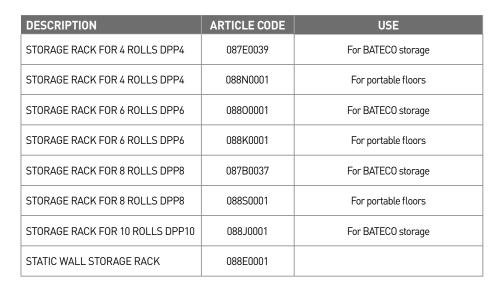






Accessories

DESCRIPTION	ARTICLE CODE	USE
CONES	087F0040	Special cones connect the inside cardboard tube with poles. This specific element is only suitable for round tubes poles
GUIDING POLE	H5390023	Fixed at the front of the storage rack to easily wind and unwind Bateco or portable floors
MOTORISED UNWINDING KIT	088G0001	Motorised system to easily wind and unwind Bateco or sports floors
HOLDING STRAP	H2950001	Holding strap to prevent roll unwinding



087G0042

FRAME EXTENSION PAIR:

The frame extension pair is only to support the roll holst. It enables the lifting of rolls to the highest position on roll stands.

Only if roll length up to 28 lm, to be ordered with storage racks

H4000012 ROLL HOIST PAIR:

Additional device for easy upload or download of rolls.





Gerflor specifications316-321

GERFLOR SPECIFICATIONS

HEALTHCARE - HOSPITAL - CLINIC - RETIREMENT HOME

	MIP(HOMOG	LAM ENEOUS	PREMIUM TARALAY MULTILAYERED						LAYERE	D			TECHNICAL TILES			
2 2	Compact	Compact	Comfort	Compact	Textile backing Comfort Compact				Compact	Comfort						
	Homogeneous Flooring (Evercare [™])	Homogeneous Flooring (PUR)	Premium Comfort	Premium Compact	Taralay Libertex	Taralay Impression Comfort	Taralay Initial Comfort	Taralay Impression Compact	Taralay Initial Compact	Timberline	Tarastep	Attraction®	GTI Max	GTI EL5		
HEALTHCARE - HOSPITAL - C	CLINIC															
Reception	•			•												
Corridors	•		•	•												
Waiting room	•		•	•		•		•	•							
Bedroom	•		•			•		•	•							
Bathroom - Toilets																
Careroom - Medical - Sick bay	•		•	•		•		•	•							
Rehabilitation room			•			•										
Surgery	•		•	•		•		•	•							
Theatre block	•		•	•												
Intensive care unit	•		•	•												
Radiotherapy - Laboratory	•			•												
Laundry - Store room												•	•	•		
Stairs											•					
RETIREMENT HOME																
Reception	•			•	•				•	•						
Corridors	•		•	•	•				•	•						
Bedroom	•		•	•	•	•			•	•						
Bathroom - Toilets																
Living room			•		•	•			•	•						
Laundry - Store room												•	•	•		
OFFICE - ADMINISTRATION																
Reception	•			•	•			•								
Office			•		•	•			•	•						
Bathroom - Toilets																
Meeting room - Board room			•		•	•			•	•						
Computer room														•		
Stairs											•					

[•] GERFLOR's recommendation

 $^{\ \}square$ Other possible solutions

OFFICE - ADMINISTRATION

CREATION LVT					TE S(ECHNICA DLUTION	AL IS		SAFE	TY FLOO	RING			DLW LIN	0	
				Compact Compact			Compact Compact		Comfort					Compact	Acoustic	LCH
Saga²	Creation 70 Connect	Creation 70	Creation 55	Creation 30	TopSilence Design	EL5/EL7 solutions (Static control flooring)	Shower system	Wall covering	Tarasafe Ultra Comfort	Tarasafe Ultra H2O	Tarasafe Ultra / Geo / Design (SparClean®)	Tarasafe Standard	Tarasafe Plus / Super	Linoleum Compact	Linoleum Acoustic	Linoleum Technical Solutions
							0,									
											•	•				
								•								
							•	•	•	•	•	•				
						•		•								
										•	•	•				
	•										•					
	•							•								
				•	•			•	•	•	•	•				
										•	•	•				
•																
•	•	•														
									•	•	•	•				
•		•				•										
						•										

GERFLOR SPECIFICATIONS

EDUCATION - INDUSTRY - HOTEL - RESTAURANT

N PORCES		MIPOLAM MOGENEOUS PREMIUM TARALAY MULTILAYERED														
	HOMOGE	LAM ENEOUS	PREM	ИIUM		TA	RALAY		LAYER	ED						
	Compact		Comfort				ing Comfort									
	- Compact	Compact	Comort	Compact						compact	Commont					
	Homogeneous Flooring (Evercare ^{™)}	Homogeneous Flooring (PUR)	Premium Comfort	Premium Compact	Taralay Libertex	Taralay Impression Comfort	Taralay Initial Comfort	Taralay Impression Compact	Taralay Initial Compact	Timberline	Tarastep	Attraction®	GTI Max	GTI EL5		
EDUCATION																
Reception	•			•	•				•	•						
Corridors	•		•	•	•				•	•						
Classroom	•		•		•	•	•		•	•						
Dormitory room					•	•	•		•	•						
Changing room																
Bathroom - Toilets																
Meeting - Library			•		•	•	•		•	•						
Computer room			•			•	•							•		
Laboratory	•			•				•	•					•		
Student's residence					•	•	•			•						
Student's refectory	•		•			•										
Multipurpose room - Hall	•		•			•										
Stairs											•					
INDUSTRY																
Clean room / Laboratory	•			•										•		
Changing room	•			•												
Computer room														•		
Production	•			•									•			
Stocking and Packaging areas													•			
Stairs											•					
HOTEL - RESTAURANT																
Reception					•			•	•							
Bedroom					•		•									
Bathroom - Toilets																
Restaurant - Bar					•			•	•							
Conference - Exhibition	•			•	•			•	•							
Cinema - Show - Theatre			•			•										
Stairs											•					
- Stair 5																

[•] GERFLOR's recommendation

 $[\]hfill \square$ Other possible solutions

EDUCATION - INDUSTRY - HOTEL - RESTAURANT

	CREA	TION LV	Т			TE S(ECHNICA DLUTION	\L IS		SAFE	TY FLOC	RING		D	LW LIN	0
Comfort									Comfort						Acoustic	€ LCH
Saga²	Creation 70 Connect	Creation 70	Creation 55	Creation 30	TopSilence Design	EL5/EL7 solutions (Static control flooring)	Shower system	Wall covering	Tarasafe Ultra Comfort	Tarasafe Ultra H20	Tarasafe Ultra / Geo / Design (SparClean®)	Tarasafe Standard	Tarasafe Plus / Super	Linoleum Compact	Linoleum Acoustic	Linoleum Technical Solutions
	•															
	•							•								
•	•															
							•		•	•	•	•				
							•	•	•	•	•	•				
•						•										
						•		•			•					
							•									
								•								
							•									
						•		•			•		•			
						•					•	•	•			
•	•	•														
•		•	•													
							•	•	•	•	•	•				
•		•														
		•														

GERFLOR SPECIFICATIONS

RETAIL - HOUSING - KITCHEN

DO WAY	MIPOL HOMOGEN	AM NEOUS	PREN			TARA	LAY MU		ERED				
() 是图 这	Compact Co	ompact	Comfort	Compact		Textile back	king Comfort	Compact		Comfort			Compact
	Homogeneous Flooring (Evercare TM)	Homogeneous Flooring (PUR)		Premium Compact	Taralay Libertex	Taralay Impression Comfort	Taralay Initial Comfort	Taralay Impression Compact	Taralay Initial Compact	Tarastep	Attraction®	GTI Max	GTI EL5
RETAIL													
Shop	•			•							•		
Department store				•							•		
Supermarket				•							•	•	
Cafeterias			•	•		•							
Stocking areas												•	
Stairs										•			
HOUSING													
Dry Private room					•		•						
Damp Private room							•						
Reception area - Corridor - Landing					•		•				•		
Other private home													
KITCHEN													
Collective kitchens													
Food preparation areas - Canteen													

[•] GERFLOR's recommendation

INSTALLATION & MAINTENANCE INSTRUCTIONS on gerflor.com

 $^{\ \}square$ Other possible solutions

.....

RETAIL - HOUSING - KITCHEN

	CREA	TION LV	Т			TI Si	ECHNICA OLUTION	AL IS		SAFE	TY FLOC	RING		D	LW LIN	0
Comfort									Comfort						Acoustic	CCH CCH
Saga²	Creation 70 Connect	Creation 70	Creation 55	Creation 30	TopSitence Design	EL5/EL7 solutions (Static control flooring)	Shower system	Wall covering	Tarasafe Ultra Comfort	Tarasafe Ultra H20	Tarasafe Ultra / Geo / Design (SparCtean®)	Tarasafe Standard	Tarasafe Plus / Super	Linoleum Compact	Linoleum Acoustic	Linoleum Technical Solutions
			I									I				
	•	•	•													
		•	•													
•	•	•	•													
				•	•		•		•	•	•	•				
	•								•	•	•					
				•	•		•									
								•					•			
								•					•			


NOTES	 	 	
-			

GERFLOR WEB SITE

NEW DESIGN, NEW NAVIGATION!




A website you can **access on your** tablet or smartphone everywhere!

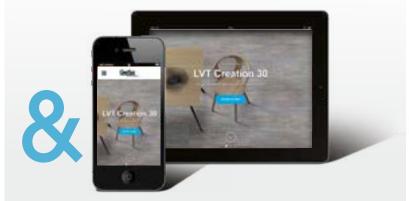


Follow us on social media!





VIRTUAL LIBRARY Access to all commercial and technical documentation that will help you developing your projects.



2 INTERIOR DESIGNER
The Interior Designer provide
you a real time simulation
of the floor selected either
in your own photo or in a
pictures' gallery.





3 STORE LOCATOR
Access to our distributor partners list and select the closest one.



Tel: +33 (0)4 74 05 40 00 Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

WE CARE I WE ACT. Our commitments for a sustainable future



CARBON FOOTPRINT





CONTENT" 10% by 2025



RECYCLED CONTENT **30%** by **2025**



35% by **2025**



Gerflor

